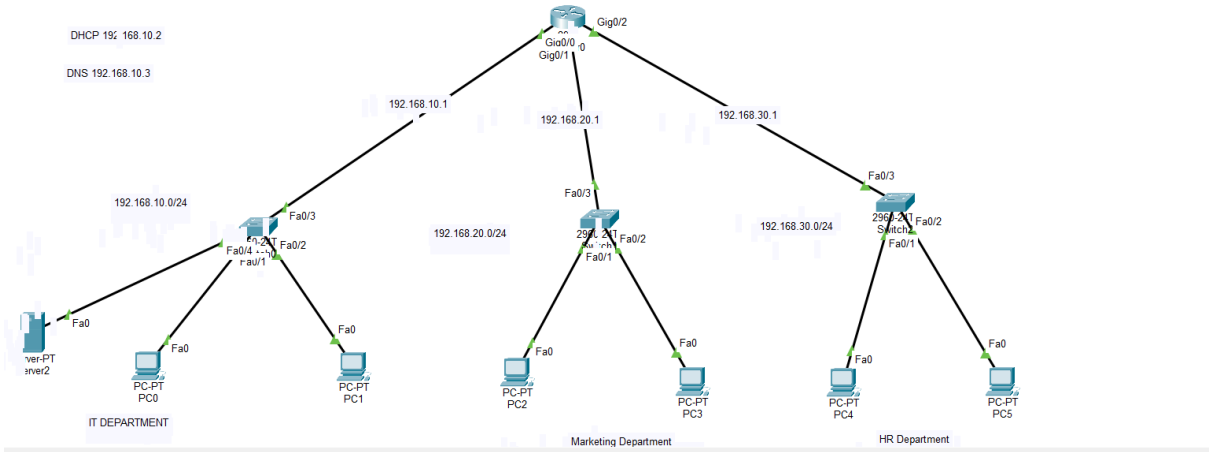
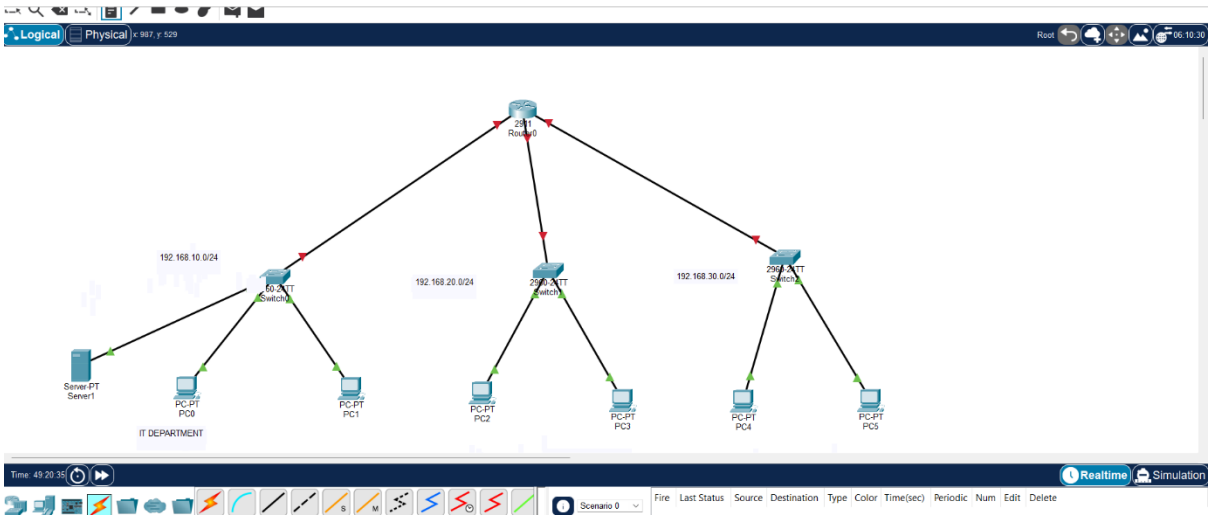
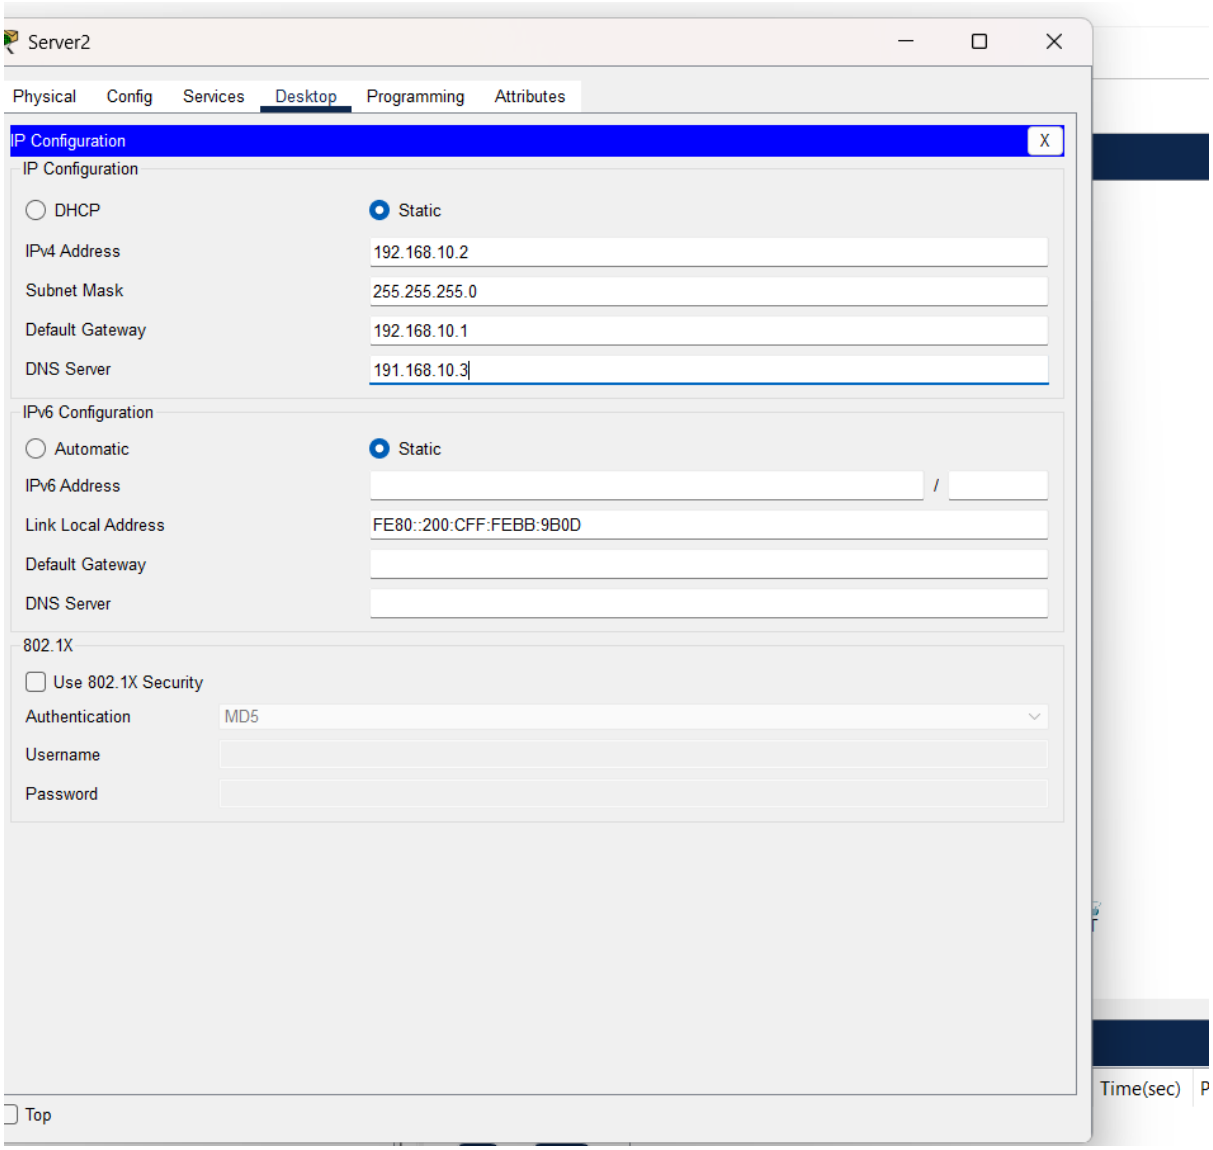
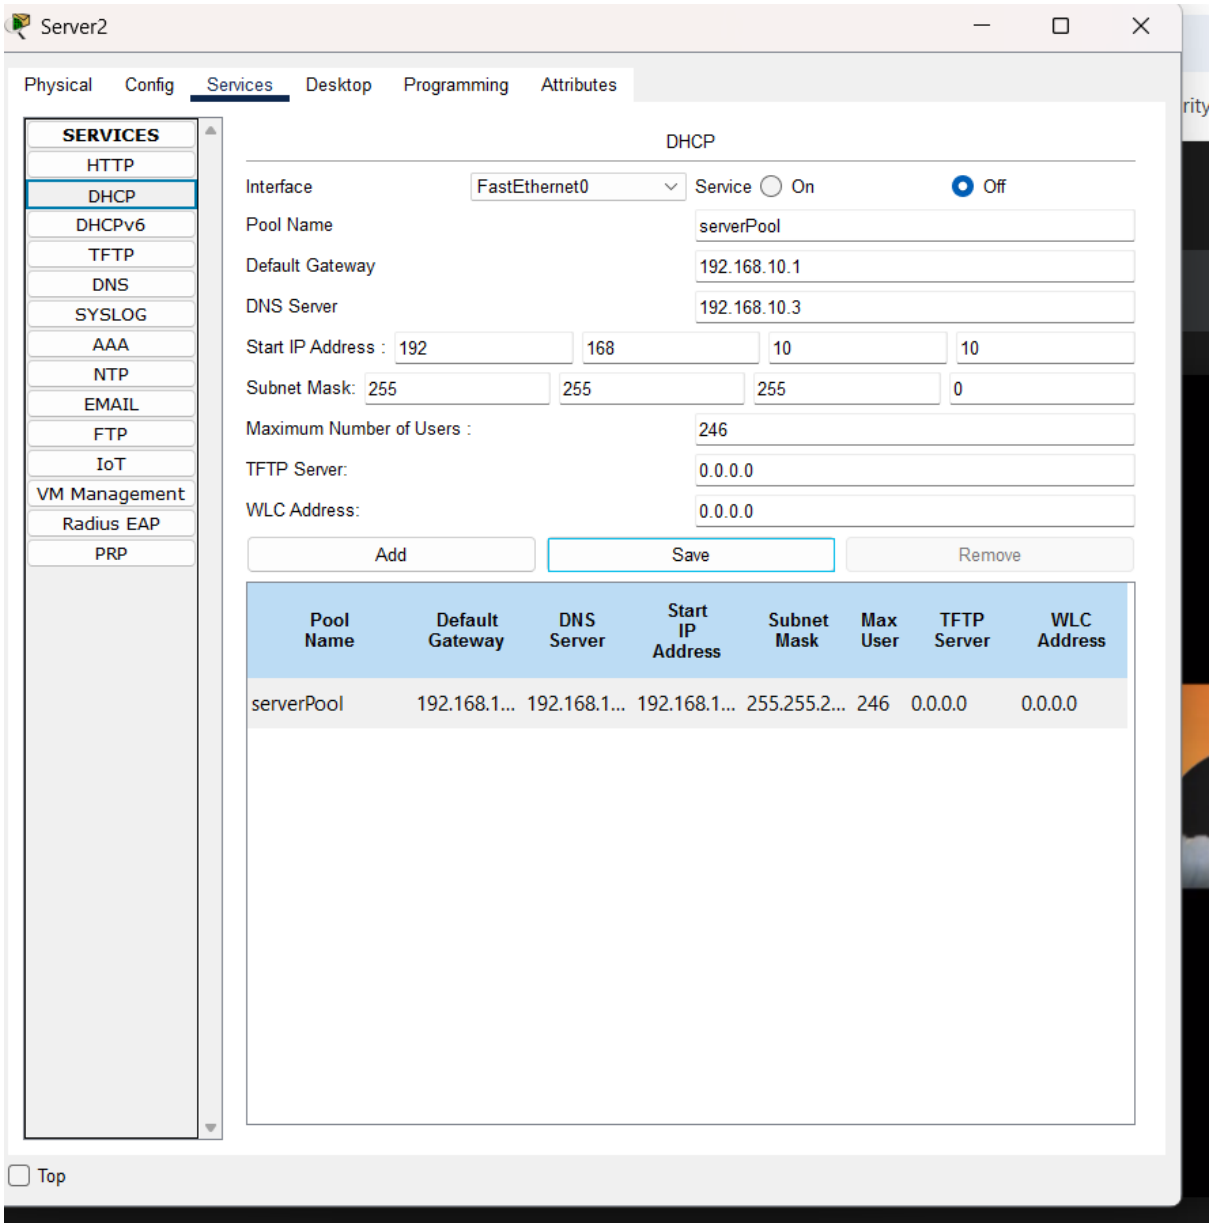
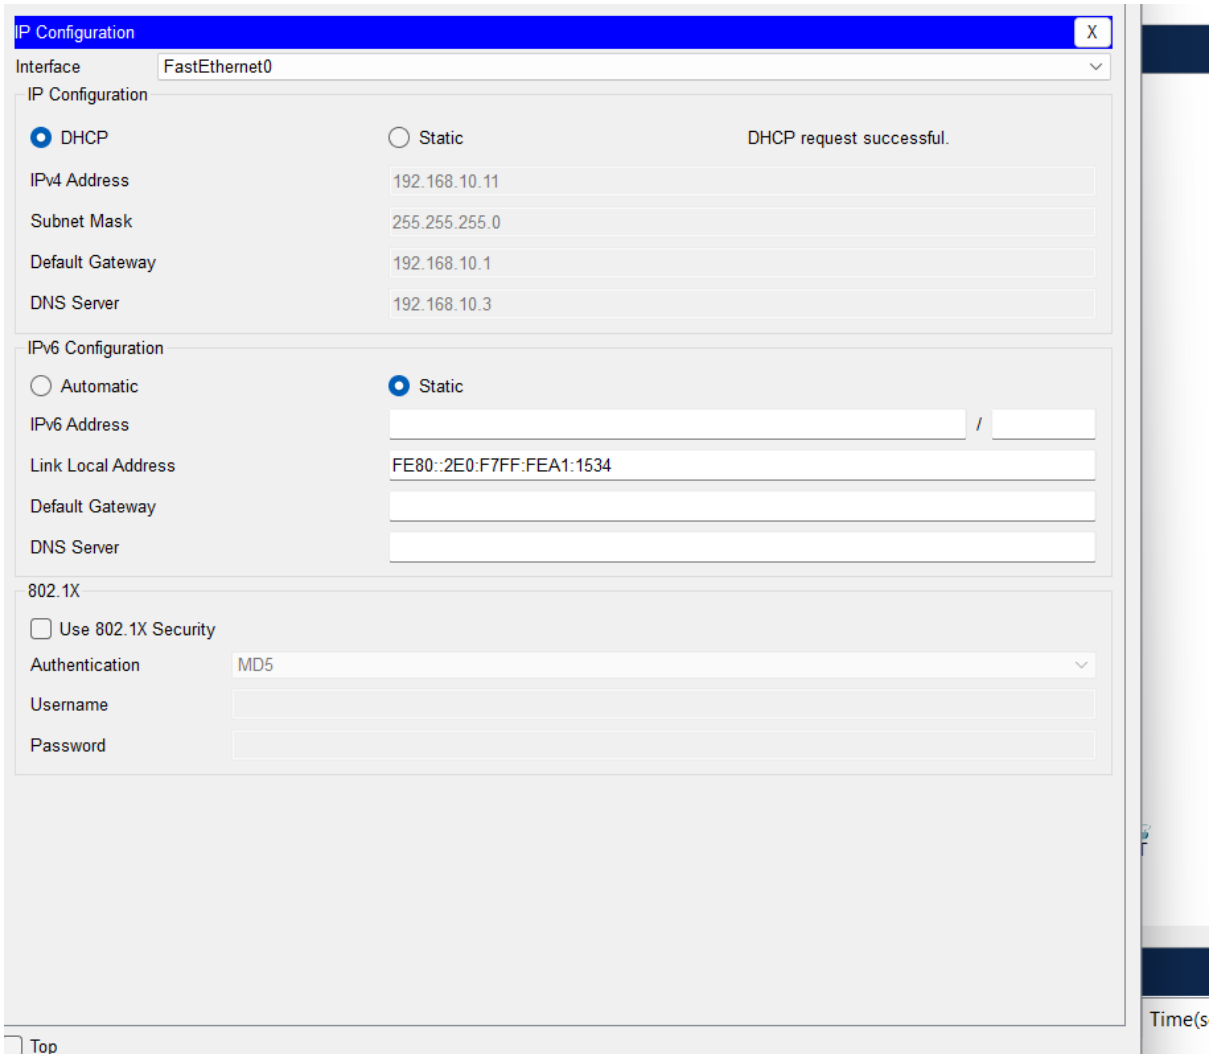
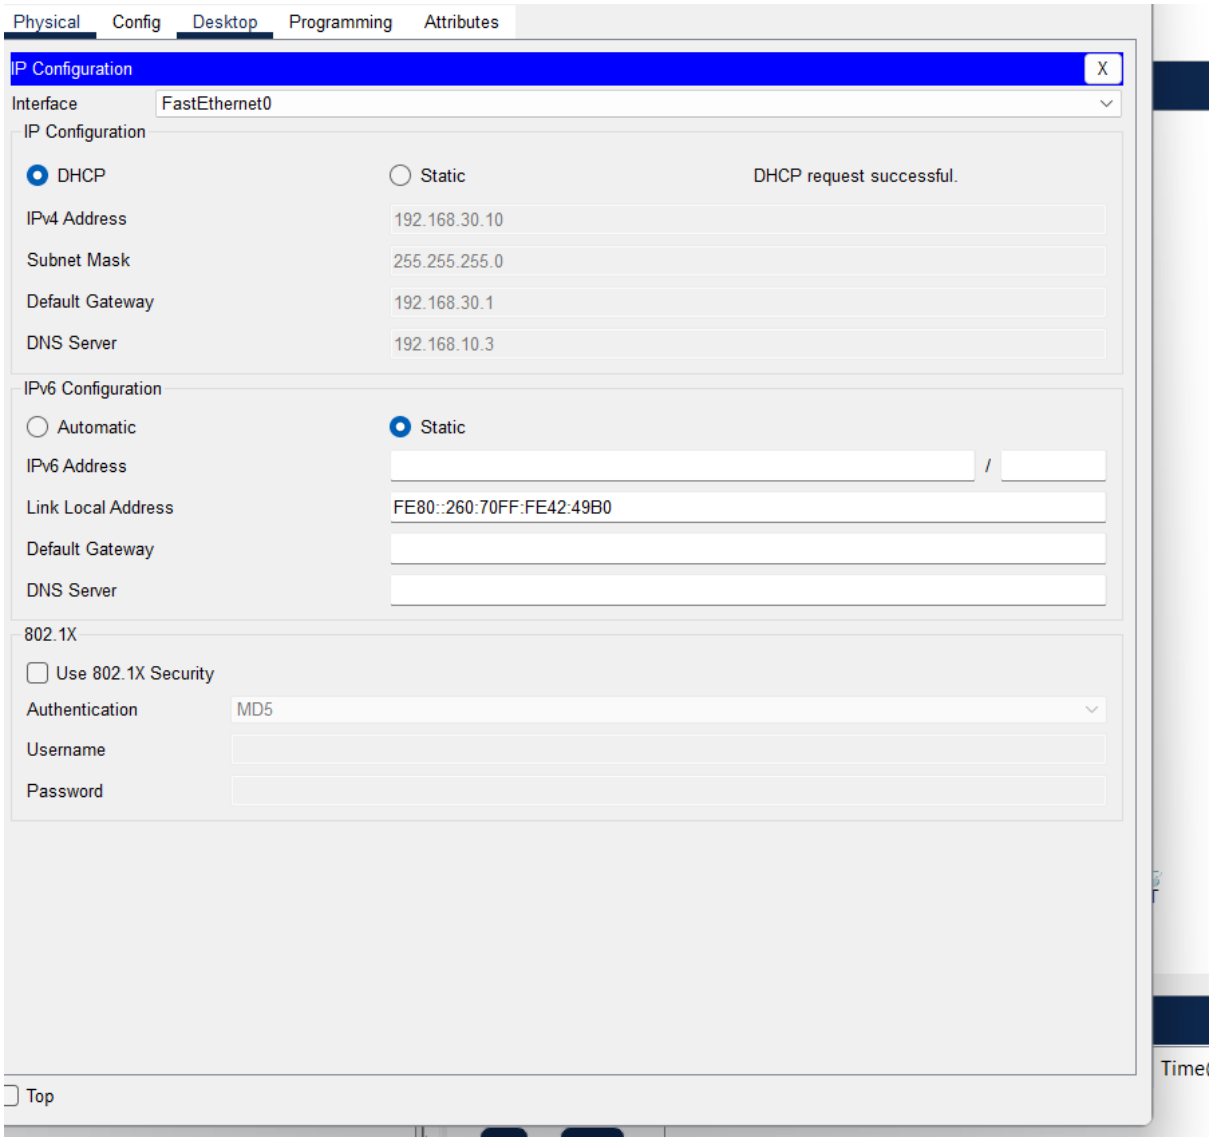

DHCP 192.168.10.2
DNS 192.168.10.3
Gig0/2
Gig0/0
Gig0/1
192.168.10.1
192.168.20.1
192.168.30.1
192.168.10.0/24
192.168.20.0/24
192.168.30.0/24
Fa0/3
Fa0/2
Fa0/1
Fa0
PC-PT PC0
PC-PT PC1
PC-PT PC2
PC-PT PC3
PC-PT PC4
PC-PT PC5
IT DEPARTMENT
Marketing Department
HR Department

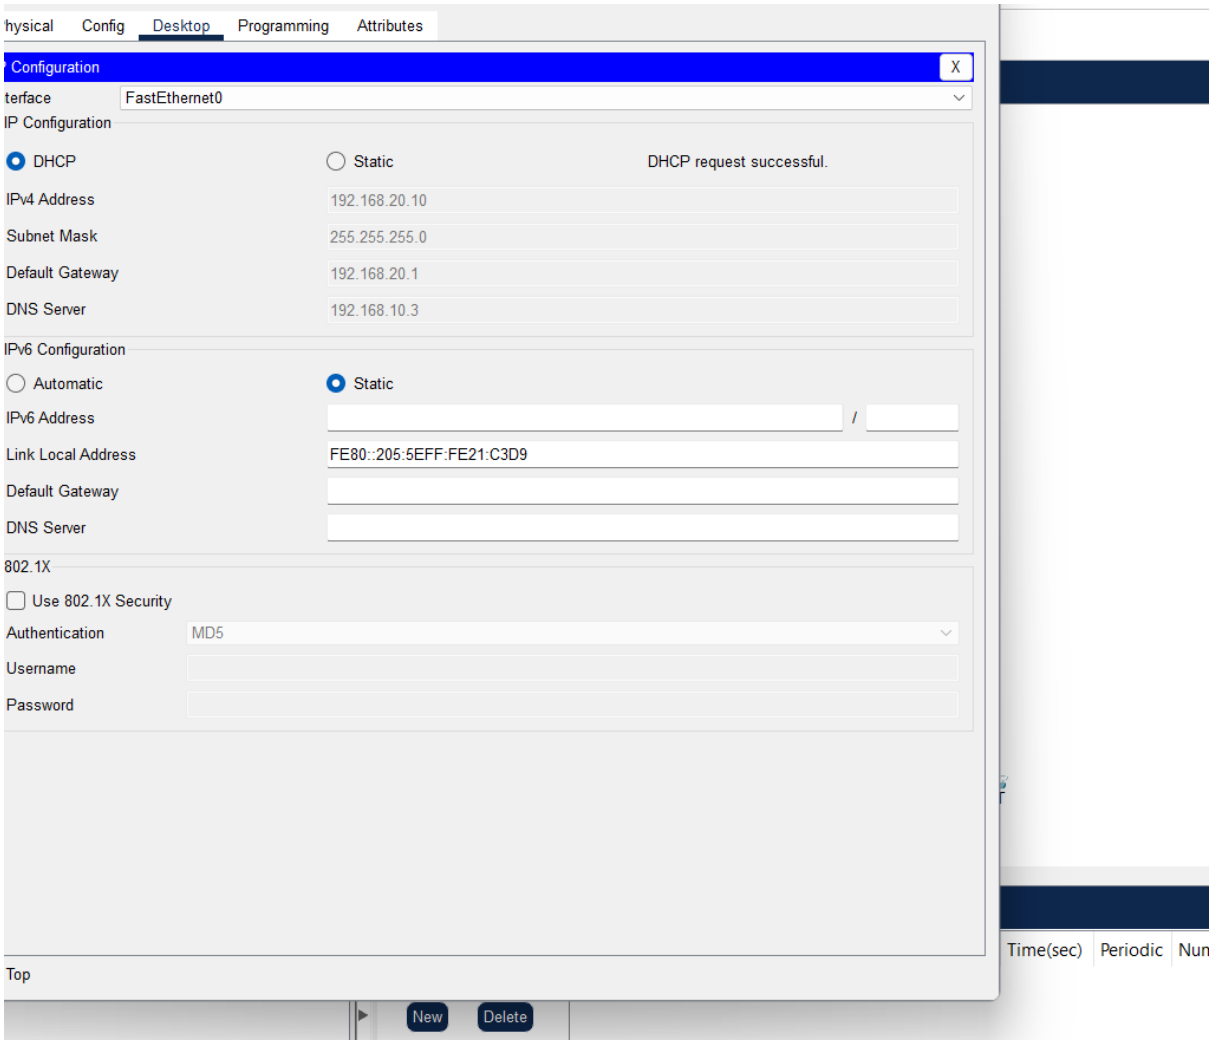

Logical
Physical
Root
192.168.10.0/24
192.168.20.0/24
192.168.30.0/24
Server-PT Server1
PC-PT PC0
PC-PT PC1
PC-PT PC2
PC-PT PC3
PC-PT PC4
PC-PT PC5
IT DEPARTMENT
Realtime
Simulation
Fire
Last Status
Source
Destination
Type
Color
Time(sec)
Periodic
Num
Edit
Delete

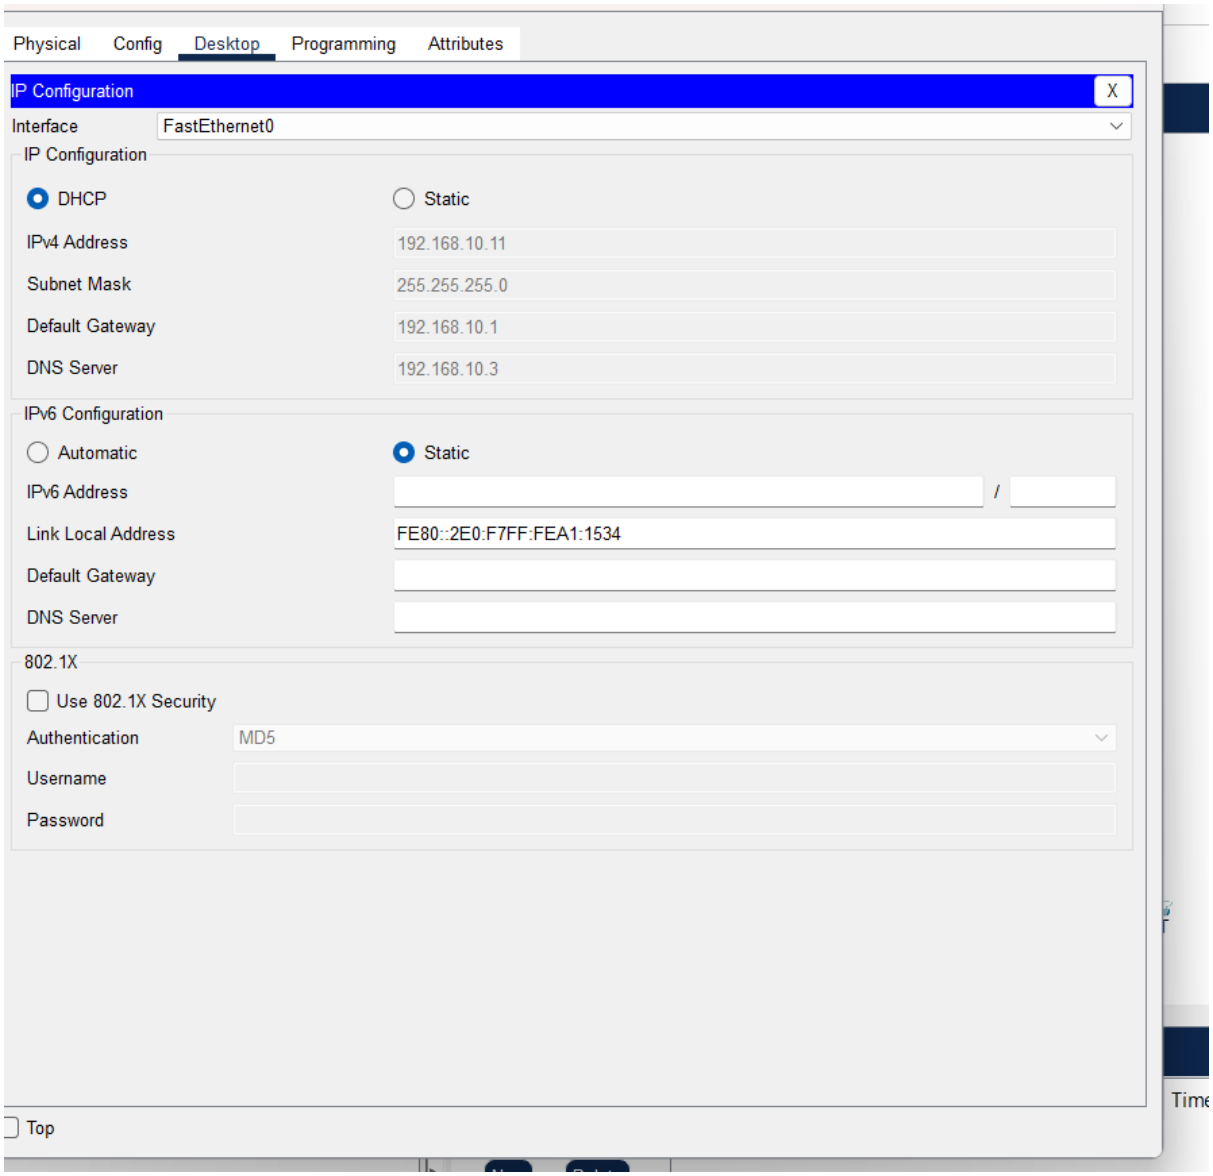

Server2
Physical
Config
Services
Desktop
Programming
Attributes
IP Configuration
X
IP Configuration
DHCP
Static
IPv4 Address
192.168.10.2
Subnet Mask
255.255.255.0
Default Gateway
192.168.10.1
DNS Server
191.168.10.3
IPv6 Configuration
Automatic
Static
IPv6 Address
/
Link Local Address
FE80::200:CFF:FEBB:9B0D
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top
Time(sec)

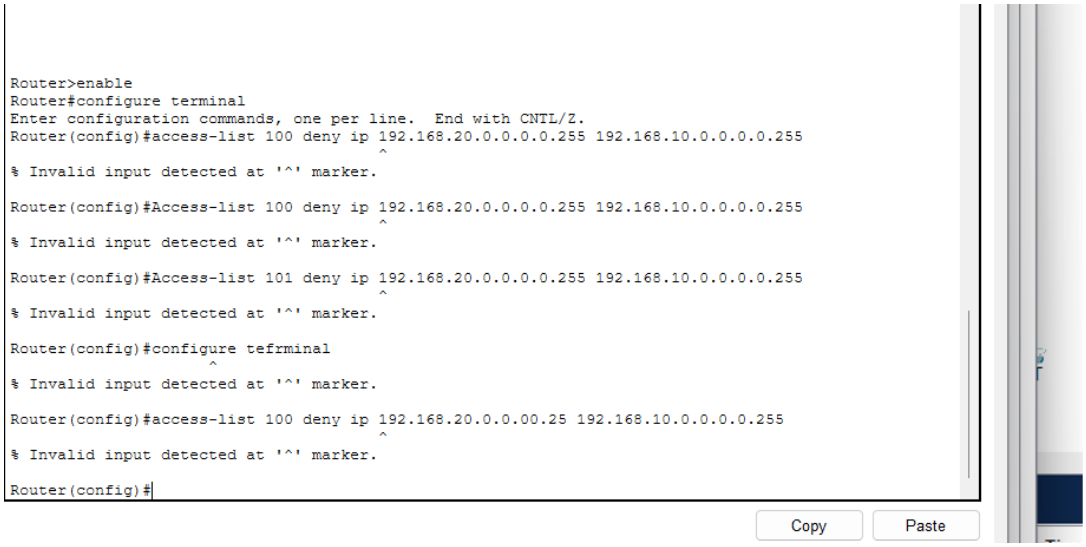

Server2
Physical
Config
Services
Desktop
Programming
Attributes
SERVICES
HTTP
DHCP
DHCPv6
TFTP
DNS
SYSLOG
AAA
NTP
EMAIL
FTP
IoT
VM Management
Radius EAP
PRP
DHCP
Interface
FastEthernet0
Service
On
Off
Pool Name
serverPool
Default Gateway
192.168.10.1
DNS Server
192.168.10.3
Start IP Address :
192
168
10
10
Subnet Mask:
255
255
255
0
Maximum Number of Users :
246
TFTP Server:
0.0.0.0
WLC Address:
0.0.0.0
Add
Save
Remove
Pool Name
Default Gateway
DNS Server
Start IP Address
Subnet Mask
Max User
TFTP Server
WLC Address
serverPool
192.168.1...
192.168.1...
192.168.1...
255.255.2...
246
0.0.0.0
0.0.0.0
Top


IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
DHCP request successful.
IPv4 Address
192.168.10.11
Subnet Mask
255.255.255.0
Default Gateway
192.168.10.1
DNS Server
192.168.10.3
IPv6 Configuration
Automatic
Static
IPv6 Address
/
Link Local Address
FE80::2E0:F7FF:FEA1:1534
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top
Time(s


Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
DHCP request successful.
IPv4 Address
192.168.30.10
Subnet Mask
255.255.255.0
Default Gateway
192.168.30.1
DNS Server
192.168.10.3
IPv6 Configuration
Automatic
Static
IPv6 Address
/
Link Local Address
FE80::260:70FF:FE42:49B0
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top


hysical
Config
Desktop
Programming
Attributes
Configuration
X
terface
FastEthernet0
IP Configuration
DHCP
Static
DHCP request successful.
IPv4 Address
192.168.20.10
Subnet Mask
255.255.255.0
Default Gateway
192.168.20.1
DNS Server
192.168.10.3
IPv6 Configuration
Automatic
Static
IPv6 Address
/
Link Local Address
FE80::205:5EFF:FE21:C3D9
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top
New
Delete
Time(sec)
Periodic
Nun


Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.10.11
Subnet Mask
255.255.255.0
Default Gateway
192.168.10.1
DNS Server
192.168.10.3
IPv6 Configuration
Automatic
Static
IPv6 Address
/
Link Local Address
FE80::2E0:F7FF:FEA1:1534
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top


Router>enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#access-list 100 deny ip 192.168.20.0.0.0.0.255 192.168.10.0.0.0.0.255
                                       ^
% Invalid input detected at '^' marker.
Router(config)#Access-list 100 deny ip 192.168.20.0.0.0.0.255 192.168.10.0.0.0.0.255
                                       ^
% Invalid input detected at '^' marker.
Router(config)#Access-list 101 deny ip 192.168.20.0.0.0.0.255 192.168.10.0.0.0.0.255
                                       ^
% Invalid input detected at '^' marker.
Router(config)#configure tefrminal
                       ^
% Invalid input detected at '^' marker.
Router(config)#access-list 100 deny ip 192.168.20.0.0.00.25 192.168.10.0.0.0.0.255
                                       ^
% Invalid input detected at '^' marker.
Router(config)#
Copy
Paste