FLOWTECH

AQURA WOLTMAN SERIES

REMOVABLE HORIZONTAL DRY TYPE WOLTMAN METER

"The long Lasting & highly durable meter"



FT WT 65 AQ-E2

FT WT 100 AQ-E1



FT WT 50AQ-E3

Technical spec: Woltman Type, Inferential , Super dry dial, straight reading in KLitres, Horizontal Flow, Magnetic Coupled water meter conforming to ISO 4064(1) Class 'B' Standard, most suitable for horizontal line connections.

Operations: AQURA Woltman meter comprises a rotor with helical blades inserted axially in the flow. Water flows through the inlet of the body and enters the measuring chamber and rotates the horizontal axis propeller. The velocity and the number of performed turns of the propeller is proportional to the volume of water passing through the meter. A drive magnet transmits the motion of the propeller to a driven magnet located in the sealed dial register. The driven magnet is connected to a gear train which translates the turbine rotation into a volume displayed on the counters in a dry dial register. Special shape of its inlet and outlet bearing is counteracting the natural hydraulic thrust applied on the impellor and preventing any downstream pivot wear. Thus meters are able to withstand high flows without impacting low flow accuracy.

Standards: Conforms to ISO 4064 (1) Class 'B'. (GB/T778:1996)

Sizes: 50mm, 65mm, 80mm, 100mm, 125mm, 150mm, 200mm, 250mm, 300mm, 500mm

Features:


- Removable and interchangeable measuring unit helps in easy installation and maintenance without re-calibration.
- The bodies are produced with high quality GG25 grey cast iron and are coated inside and outside with a potable water approved epoxy coating. This reliably protects the meter from corrosion and ensures that the potable water remains safe.
- The hermetically sealed dial register is protected by a metal protective lid, prevents breakage and readability issue even in the worst environmental conditions.
- Improved readability : dials can be rotated 360° for convenient meter reading.
- Its proven technology combines good quality metrology properties and great endurance.
- Magnetic transmission propeller rotation keeps the register completely separate from water, only the propeller and transmission shaft gets in contact with water.
- Bodies equipped with flanges according to the standards DIN 2501 and ISO 7005 PN10/PN16 respectively.
- Inlet and outlet bearings are specially designed to withstand natural hydraulic thrust. It prolongs the life of the moving parts and end result is long term accuracy of water meter.
- Optional Pulse output facility can be provided a 10 ltr, 100 ltr or 1000ltr/ pulse for advanced **AMR Application.**
- Remote display units can be connected for reading from hard-to-read locations.

Technical data:

Nominal size DN(mm)	Class of measurement	Maximum flow-rate $q_{max}(m^3/h)$	Nominal flow-rate $q_n(m^3/h)$	Transitional flow-rate $q_t(m^3/h)$	Minimum flow-rate $q_{min}(m^3/h)$	Minimum reading $Min(m^3)$	Maximum reading $Max(m^3)$
50	B	30	15	3.0	0.45	0.01	999999
65	B	50	25	5	0.75	0.01	999999
80	B	80	40	8	1.2	0.01	999999
100	B	120	60	12	1.8	0.1	999999
125	B	200	100	20	3	0.1	999999
150	B	300	150	30	4.5	0.1	9999999
200	B	500	250	50	7.5	0.1	9999999
250	B	800	400	80	12	0.1	9999999
300	B	1200	600	120	18	0.1	9999999

Overall dimension and weight:

Type	Size (mm)	Length (mm) L	Width (mm) W	Height (mm) H	Connecting Thread D	Connecting Thread D1	Connecting Bolt (Pcs.)	Weight (kg.)
FT WT 50 AQ-E3	50	200	172	247	165	125	4xM16	12
FT WT 65 AQ-E3	65	200	185	260	185	145	8xM16	13
FT WT 80 AQ-E3	80	225	200	264.5	200	160	8xM16	15
FT WT 100 AQ-E3	100	250	225	271.5	220	180	8xM20	19
FT WT 125 AQ-E3	125	250	250	295	250	210	8xM20	23
FT WT 150 AQ-E3	150	300	285	301.5	285	240	8xM20	30
FT WT 200 AQ-E3	200	350	340	358.5	340	295	12xM20	42
FT WT 250 AQ-E3	250	400	395	413.5	395	350	12xM20	51
FT WT 300 AQ-E3	300	450	445	463.5	445	400	12xM20	63



Metering Accuracy:

Metering Accuracy		Head Loss	
Flow Rate	Error %	Flow Rate	Limits
Q_{max}	± 2%	Q_{max}	0.025 MPa
$Q_{nominal}$	± 2%		
$Q_{transitional}$	± 2%	$Q_{nominal}$	0.1MPa
$Q_{minimum}$	± 5%		


Result:

- From minimum flow-rate (q_{min}) inclusive, to transitional flow-rate (q_t) exclusive:±5%
- From transitional flow-rate (q_t) inclusive to overload flow-rate (q_s) exclusive:±2%


Working Condition:

- Water temperature < 50°C
- Water pressure ≤ 1MPa (PN: 1.6MPa/16bar)
- ΔP ≤ 0.1MPa

Error Curve:

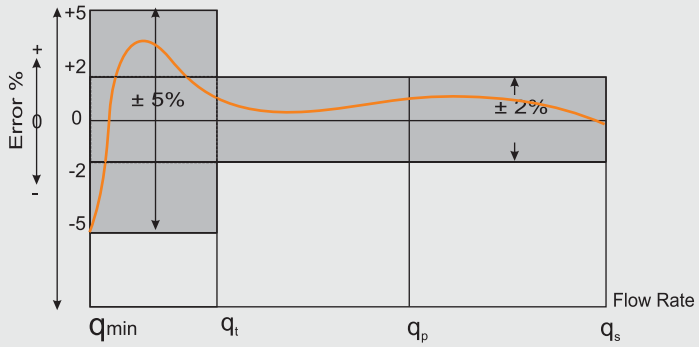

Head loss curve:

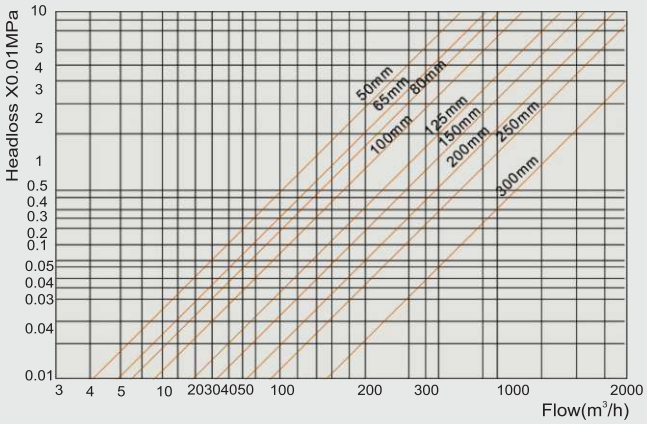

MANUFACTURED & MARKETED BY:

FLOWTECH WATER METERS AND INSTRUMENTS PRIVATE LIMITED

REGD. OFFICE:
PALLIKUNNEL,
No. 36/3180,
UDAYA NAGAR, KALOOR,
COCHIN, KERALA, INDIA.
PIN- 682017.
PH: 91-9446333195

WORKS:
FLOWTECH,
SF No. – 694/1A, 2A,
MADHUKKARAI ROAD,
KURICHY, COIMBATORE
PIN-641 021
PH: 0422-2930069

MARKETING OFFICE:
FLOWTECH,
36/2941 & 36 /2942
ST. FRANCIS CHURCH ROAD,
KALOOR, COCHIN-682017
PH: 0484-2342406/07

Email: sales@flowtechmeters.com, flowtechmeters@gmail.com
Visit us online at www.flowtechmeters.com