

Tonopah H.S. Concession Stand Overhead Doors

[illegible]

ROLLOK

Rolling Doors & Security Shutters





Thank you for your interest in Rollok and our rolling security doors and shutters. Enclosed in this vendor packet is some information about Rollok as well as information on our materials and forms.

Rollok in the beginning

Rollok was founded in 1989 with a goal of manufacturing high quality rolling security door and shutter solutions to fit any application where security and protection needed to work in parallel with design and function. Over the years Rollok has partnered with fabricators, designers, retailers, craftsmen, architects, and homeowners to create solutions that fit the needs of the design or application.

Rollok today

Rollok is in Fort Worth, Texas USA and is a leader in developing security rolling door and shutter solutions for many applications across numerous industries. Rollok is focused on delivering the highest quality solution, on time, at a great value where the customer receives top tier customer service before, during, and after the completion of the project. Our guiding principles are based on four pillars which include Quality, Excellence, Integrity, and Relationships. These Four pillars guide each team member's actions daily to ensure that we, as an organization, exceed our partner's expectations.

Evolution

Rollok has evolved over the years as have our materials, processes, equipment and standards of excellence. To provide our customers and partners the best experience from quote to order and from production to delivery, Rollok is constantly looking for areas of improvement. Thus, to drive down lead times, Rollok maintains a robust inventory of raw materials and has invested in new technology to increase efficiencies and quality. Rollok also invests in researching and developing new solutions that can provide new opportunities for our clients. An incredibly large part of the continuing evolution of Rollok is the fourth pillar of Relationships. We at Rollok believe that our relationships or partnerships with our clients as well as our supplier partners is key to meeting the needs of the market, providing new and inventive solutions, and continuing to be the security rolling door and shutter company that delivers based on the needs of the application and client.

As you review the enclosed information if you have questions, need additional information, or need samples please feel free to contact Rollok at 888-840-2833 or email us at sales@rollok.com, we are here to help you and your clients.



Description

37mm designed for multi-use. Protection for merchandise, and for residential areas.

Application

- Energy Savings
- Light Control
- Noise Reduction
- Privacy
- Automated Control

37mm Features and Benefits

- Low profile allows for lower profile housing
- Roll Form Aluminum provides durability
- Foam core provides rigidity, noise reduction and is resistant to impact

Colors

- White
- Beige
- Bronze
- Black
- Silver
- Red
- Specific colors can be special ordered (quantity minimums are required and extended lead time)



Stock Colors

Housing and Design

90 degree

Operators

- Manual: Spring Assisted
- Motorized: Remote Control, Key Pad, Wall Switch

Motorized systems:

- Control multiple shutters with master operator
- Keypad availability for minimizing the hassle of additional keys and/or remotes

Slat Profile:

- Material: Roll formed aluminum
- Slat Profile, made of a 3005 H27 aluminum alloy per ASTM aluminum standards which is coil coated with a high quality polyester paint on the outside to insure durability and a poly primer on the inside to provide an adhesive surface for the polyurethane foam core. The foam is injected during the forming process, adding structural composition as well as insulating qualities.
- Interlocking slats, continuous for the entire door width, must have side locks stapled or glued to the ends of alternating slats.
- Rated thickness – .335"
- Weight per square foot – 0.88lbs.

Box Size		4"	5.0"	5.5"	6.5"	7"	8"	9"
Slat Size	37mm Roll Formed							
Axle Dia.	40mm	25.00"	45.00"	50.00"	98.00"	110.00"	156.00"	180.00"
	60mm	20.00"	42.00"	46.00"	92.00"	105.00"	144.00"	168.00"

Description

35mm designed for multi-use. Protection for merchandise, and for residential areas.

Application

- Energy Savings
- Light Control
- Noise Reduction
- Privacy
- Automated Control

35mm Features and Benefits

- Extremely durable double wall design
- Rigid with minimal flex
- Impact resistant
- Recommended for extra security and severe weather protection

Colors

- Silver
- Anodized
- Special Powder Coat per request



Stock Color

Housing Design

90 degree

Operators

- Manual: Spring Assisted
- Automated: Wall Switch or Remote Control, Emergency Override

Motorized systems:

- Control multiple shutters with master operator
- Home Automation Integration
- Keypad for outdoor access

Slat Profile:

- Material: Extruded aluminum, alloy 6063-T5, AN 518 clear anodized
- Slat Profile: 35mm height, double wall shape, wall thickness 0.040"
- Interlocking Slats: continuous for the entire door width, must have side locks pressed and/or crimped to the ends of alternating slats.
- Rated thickness: 0.335"
- Weight per square foot: 1.82 lb.

Box Size		4"	5.0"	5.5"	6.5"	7"	8"	9"
Slat Size	35mm Double Wall Extruded							
Axle Dia.	40mm	25.00"	32.00"	45.00"	88.00"	96.00"	124.00"	180.00"
	60mm	20.00"	24.00"	38.00"	82.00"	90.00"	120.00"	144.00"

Description

35mm designed for multi-use. Protection for merchandise, and for residential areas.

Application

- Security
- Energy Savings
- Light Control
- Privacy
- Automated Control

35mm Features and Benefits

- Extremely durable single wall design
- Rigid with minimal flex
- Impact resistant
- Recommended for extra security and severe weather protection

Colors

- Anodized-
- Special Powder Coat per request



Stock Color
Custom Powder-coating available

Housing Design

90 degree

Operators

- Manual: Spring Assisted
- Automated: Wall Switch or Remote Control, Emergency Override

Motorized Systems:

- Control multiple shutters with master operator
- Home Automation Integration
- Keypad for outdoor access

Slat Profile:

- Material: Extruded aluminum, alloy 6063-T5, AN 518 clear anodized
- Slat Profile: 35mm height, single wall shape, wall thickness 0.040"
- Interlocking Slats: continuous for the entire door width, must have side locks pressed and/or crimped to the ends of alternating slats.
- Rated thickness: 0.040"
- Weight per square foot: 1.82 lb.

Box Size		4"	5.0"	5.5"	6.5"	7"	8"	9"
Slat Size	35mm Single Wall Extruded							
Axle Dia.	40mm	25.00"	32.00"	45.00"	88.00"	96.00"	124.00"	180.00"
	60mm	20.00"	24.00"	38.00"	82.00"	90.00"	120.00"	144.00"

24mm Single Wall Extruded Aluminum Slat System

Description

24mm designed for multiple uses with a contemporary stile in mind.

Application

- Security
- Light Control
- Noise Reduction
- Privacy
- Automated Control

24mm Features and Benefits

- Low profile allows for lower profile housing
- Extruded aluminum structure provides rigidity
- Sleek flat surface profile provides a clean and contemporary look

Colors

- Anodized
- Brushed
- Black
- Custom powder coating is available. Additional charges are applied for this service as well as lead times may have to be extended based on powder availability



Stock Colors

Housing and Design

90 degree

Operators

- Manual: Spring Assisted
- Motorized: Remote Control, Key Pad, Wall Switch
- Tambour (no operator)

Motorized systems:

- Control multiple shutters with master operator
- Keypad availability for minimizing the hassle of additional keys and/or remotes

Slat Profile:

- Material: Extruded aluminum
- Slat Profile, made of a 6063-T5, AN 518 clear anodized. Slat is 24mm high with a wall thickness of .040". included interseal liner between every slat, Interlocking slats, continuous for the entire door width, must have side locks pressed to the ends of slats.
- Rated thickness – .335".
- Weight per square foot – 1.22 lbs.

Box Size	4"	5.0"	5.5"	6.5"	7"	8"	9"
Slat Size	24mm Single Wall						
Axle Dia.	40mm	N/A	42.00"	46.00"	80.00"	86.00"	
	60mm	N/A	31.00"	40.00"	76.00"	80"	108.00"
Minimum Widths:			24.00"	28.00"	32.00"	48.00"	124.00"

Description

53mm designed for multi-use. Storm Protection, Hurricane Protection, Retail, Commercial and Residential Security .

Application

- Hurricane/Storm
- Security
- Energy Savings
- Light Control
- Impact Rated
- Noise Reduction
- Privacy
- Automated Control
- Wind Load Rating 6
- Hail Class 7

53mm Features and Benefits

- Impact rating of "D"
- Holds Miami Dade County Hurricane Rating
- Potential total U factor value improvement of up to 42%
- Screw in end retention
- Low profile allows for lower profile housing
- Roll Form Aluminum provides durability
- Foam core provides rigidity, noise reduction and is resistant to impact

Colors

- White
- Specific colors can be special ordered (quantity minimums are required and extended lead time)



Housing and Design

45 degree back and 90 degree front

Operators

- Manual: Spring Assisted
- Motorized: Remote Control, Key Pad, Wall Switch

Motorized Systems:

- Control multiple shutters with master operator
- Control options: wireless keypad, keyed operator, variable switch, as well as other special order options also available.

Slat Profile:

- Material: Roll formed aluminum
- Slat Profile, made of a 3005 H27 aluminum alloy per ASTM aluminum standards which is coil coated with a high quality 2 layer polyester paint on the outside to insure durability and a poly primer on the inside to provide an adhesive surface for the Melamin resin form foam core. The foam is injected during the forming process, adding structural composition as well as insulating qualities.
- Interlocking slats, continuous for the entire door width, must have end retention side locks secured at the ends with two screws of alternating slats.
- Rated thickness – .551"
- Max Width - 18'
- Max Height - 13.1'
- Max Square Footage - 177.61

Stock Color White - Bronze and Beige available by special order



Box Size		8"	9"	10"	12"
Slat Size	53mm RC 2	Max Curtain Height			
Axle Dia.	70 mm	70"	91"	118"	157.4"
	120 mm	51"	70.5"	98"	157.4"



Rolling Doors & Security Shutters

53mm RC3 Foam Filled Stainless Steel Impact Level E Slat System

Description

53mm designed for multi-use. Security, Retail, Commercial and Residential Security .

Application


- Security
- Energy Savings
- Light Control
- Impact Rated
- Noise Reduction
- Privacy
- Automated Control
- Wind Load Rating 6
- Hail Class 7

53mm Features and Benefits

- Impact rating of "E"
- Potential total U factor value improvement of up to 56%
- Optimized noise insulation of +10db
- Screw in end retention
- Low profile allows for lower profile housing
- Strip material in stainless steel design
- Foam core provides rigidity, noise reduction and is resistant to impact

Color

- Stainless Steel

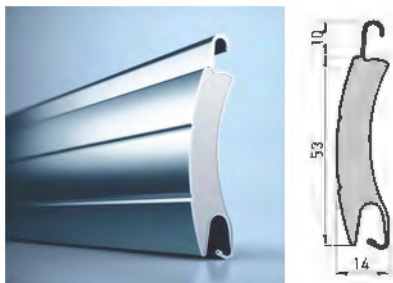

Stock Color - Stainless Steel Finish



Housing and Design

45 degree back 90 degree front

Operators

- Manual: Spring Assisted
- Motorized: Remote Control, Key Pad, Wall Switch

Motorized Systems:

- Control multiple shutters with master operator
- Control options: wireless keypad, keyed operator, variable switch, as well as other special order options also available.

Slat Profile:

- Material: Roll formed stainless steel
- Slat Profile, roll formed from a high grade steel allow and filled with a heavy duty two component composite material, cast resin. The resin is injected during the forming process, adding structural composition as well as insulating qualities.
- Interlocking slats, continuous for the entire door width, must have end retention side locks secured at the ends with two screws at each slat.
- Rated thickness – .551"
- Max Width - 19'
- Max Height - 13.1'
- Max Square Footage - 193.75'

	Box Size	8"	9"	10"	12"
Slat Size	53mm RC 3	Max Curtain Height			
Axle Dia.	70 mm	70"	91"	118"	157.4"
	120 mm	51"	70.5"	98"	157.4"

Rollok
685 John B. Sias Memorial Parkway
Suite 875
Fort Worth, TX 76134

1-888-840-2833
info@Rollok.com
www.rollok.com



L01 - Padlock Eye

- Use any padlock
- Easy to replace lock when needed
- Installed on the bottom slat and guide rail assembly



L02 - Lock with Bars

- Installed on bottom slat
- engages both guide rails when locked
- Rollok's most popular lock




L03 - Slide lock

- Installed on bottom slat
- Great solution for counter shutters to secure from non-public side



**L04 - Lock with Bar
(removable core)**

- Installed on bottom slat
- has removable core
- key is break resistant
- Engages both guide rails when locked

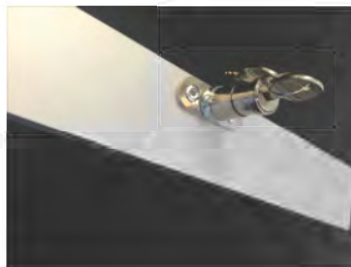


L05 - Plunger Lock

- Installed on the guide rail
- locks into a locking slat installed in slat curtain
- Has a removable core



L06 - Code Lock

- Installed on the guide rail
- Operates with a locking cam
- Can hold two codes
- Perfect for area where multiple people need access

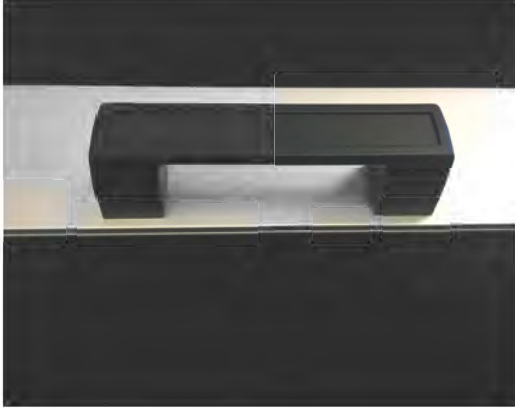

H1 Handle

- Commercial look
- Large opening for hand placement
- Black in color



H2 Handle

- Sleek design
- Contemporary look
- Aluminum/silver finish



H3 Handle

- Clean look
- Slim design while providing ample room for hand placement
- Aluminum/silver finish



H4 Handle

- Clean zero profile handle
- Recessed into bottom slat
- Great handle when space is a premium
- Black in color



H5 Handle

- Smooth contemporary design
- Exemplary finish
- Polished Silver in color



BSS1 - Stops

- Sleek Design
- Available in black



BSS2 - Stops

- Functional design
- White in color



BSS3 - Stops

- Commercial look and durable
- White in color



BSS4 - Stops

- Industrial look and sturdy
- Aluminum with Black in color




Rolling Doors & Security Shutters

DIMENSIONS DIAGRAM

817-695-1010

sales@rollok.com


JOB NAME: _____

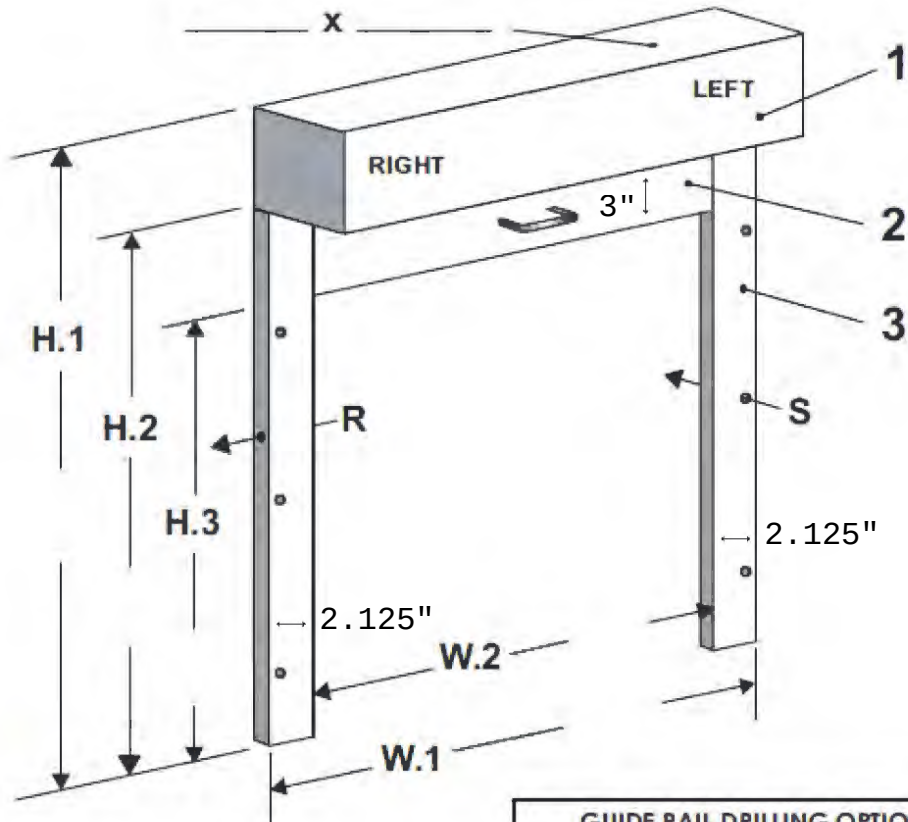

KEY TO DIAGRAM

H.1 - Overall Height	1 - Housing
H.2 - Height of Guide Rail	2 - Bottom Slat
H.3 - Height to Bottom Slat	3 - Guide Rail
W.1 - Overall Width	R - Recess Drilling
W.2 - Surface Width	S - Surface Drilling

GUIDE RAIL DRILLING OPTIONS

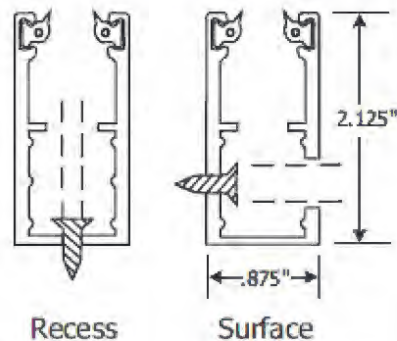



Rolling Doors & Security Shutters

PRICING/ORDER FORM

1-888-840-2833 www.rollok.com

☐ REQUEST FOR PROPOSAL

☐ ORDER

Send To: sales@Rollok.com or Fax to 817-701-1513

Today's Date:

Company:

Company:

Purchase Order:

Contact:

Contact:

Job Name:

Address:

Address:

Desired Ship Date:

Ph #:

City:


City:

Fax #:


State: Zip:

State: Zip:

E-mail:

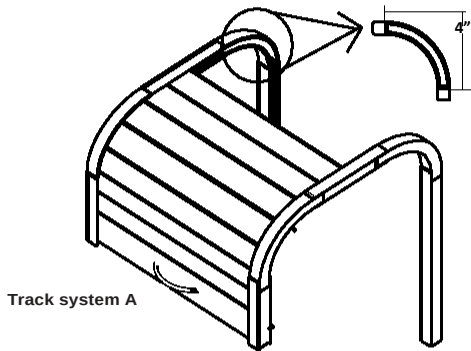


Track system A

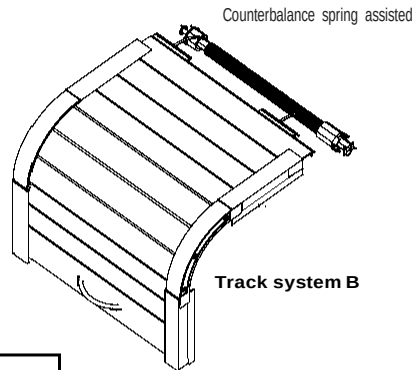


Track system B

Notes:

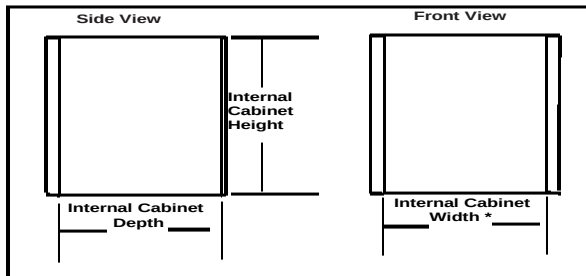

* When ordering Recess Track Please note Track must be mortised 5/8" to 3/4" into the cabinet sides. To determine internal size measure from mortise to mortise.

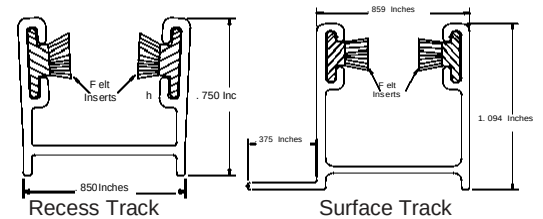

QTY	Track system	WIDTH	HEIGHT	DEPTH	Color	Track OPTIONS	Operation	Handle Type	Lock Type	Price Each Door	Total PRICE
#	A or B	Internal Cabinet Width	Internal Cabinet Height	Internal Cabinet Depth	Silver, White, Beige, Bronze, Black	Surface (S) Recess (R)	Spring, None	(See Prod. Guide)	(See Prod. Guide)		(For office use only)
1											
2											
3											
4											
5											
6											
7											

ESTIMATED FREIGHT COST (not included in total):

QUOTE PREPARED BY: Date:

TOTAL PRICE OF ALL DOORS :

The total price includes preparation for shipping, but does not include freight costs. If this proposal is satisfactory, you may sign and return via fax at 817-701-0694 to confirm the order. Once this proposal is signed and returned, we can begin production on your Tambour Doors. This proposal is effective for 60 days.

I accept and confirm this order.

Order Confirmation Signature

Date

The information in this form is confidential. This form is intended to be reviewed only by the individual or organization named above. If you are not the intended recipient or an authorized Representative of the intended recipient, you are hereby notified that any review, dissemination, or copying of this form or any of the information contained herein is prohibited. Thank you.


☐ REQUEST FOR PROPOSAL ☐ ORDER

1.817.695.1010



www.rollok.com

FAX this form to: 1.817.701.1513 EMAIL to:sales@Rollok.com

BILLING ADDRESS		SHIPPING ADDRESS		Today's Date:
Company: _____		Company: _____		Purchase Order: _____
Contact: _____		Contact: _____		Job Name: _____
Address: _____		Address: _____		Desired Ship Date: _____
_____		_____		Ph #: _____
City: _____		City: _____		Fax #: _____
State: _____ Zip: _____		State: _____ Zip: _____		E-mail: _____

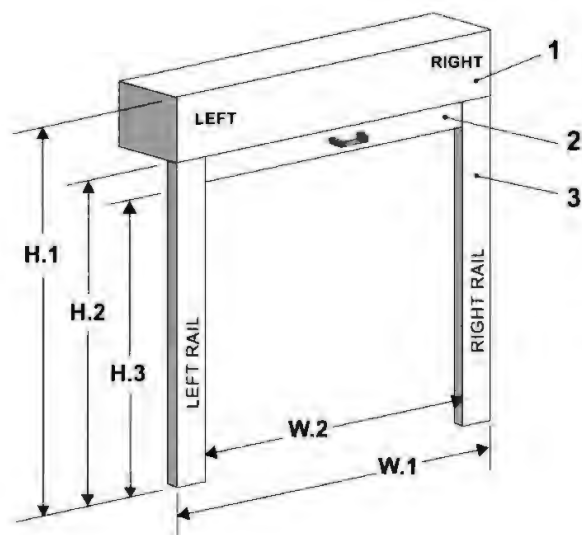

INSTRUCTIONS: Please carefully measure your opening(s) and fill in the following:

NOTES		
KEY TO DIAGRAM H.1 - Overall Height (OAH) H.2 - Height of Guide Rail H.3 - Height to Bottom Slat W.1 - Overall Width (OAW) W.2 - Surface Width 1 - Housing 2 - Bottom Slat 3 - Guide Rail R - Recess Drilling S - Surface Drilling	Drilling Options 	Lock & Handle Placement 

QTY	WIDTH	HEIGHT	Operation	COLOR	DRILLING OPTIONS	Lock/Handle Placement	Handle Type	Lock Type	BSS Stops	PRICE EACH
#	(W.1 or W.2)	(H.1, H.2, H.3)	Spring or Motor	Silver, White, Beige, Black, Bronze	Surface (S) or Recess (R)	Which Side? (see above)	(See Prod. Guide)	(See Prod. Guide)	(See Prod. Guide)	(For office use only)
1										
2										
3										
4										

ESTIMATED FREIGHT COST (not included in total):

TOTAL PRICE OF DOORS :

QUOTE PREPARED BY :

(For office use only)

(For office use only)

The total price includes preparation for shipping, but does not include freight costs. If this proposal is satisfactory, you may sign and return to confirm the order. Once this proposal is signed and returned, we can begin production on your shutters. This proposal is effective for 60 days.

I accept and confirm this order.

Order Confirmation Signature

Date

Applications and Usage of Rollok rolling security doors and shutters



Millwork and Cabinetry

Counter Shutters



DOD and First Responders

Residential





Storage Solutions

Storefronts and Commercial



Kiosks and RMU's

Fixtures



653

ALLURA® SHUTTER



ROLLING SECURITY DOOR



UPSCALE FEATURES.
STYLISH AESTHETICS.
COMPACT DESIGN.



INDUSTRY LEADING
COMMERCIAL & INDUSTRIAL SOLUTIONS



Standard features at a glance

Max height^Δ	14' (4267 mm)
Max width^Δ	20' (6096 mm)
Mounting	Face-of-wall or between jambs mounting
Curtain	Interlocking extruded .05" aluminum slats. Nickel plated, steel screws and end locks to retain curtain within guides and prevent lateral movement. Plastic roller retainers for curtains over 16' wide
Fenestration/perforation	Open fenestration 1" x 1" uniformly spaced openings, full curtain, 24% open area; Perforation full curtain, 22% open area ; Partial fenestration 1" x 1" uniformly spaced openings; Partial perforation
Finishes	Silver powder coat to mimic look of clear anodized aluminum; Bronze powder coat to mimic look of bronze anodized aluminum, White or Almond powder coat
Bottom Bar	Aluminum compact bottom bar with vinyl bulb seal powder coated to match curtain
Brackets	Steel plates powder coated to match curtain

Guides	Extruded aluminum channels with continuous wear strips. Powder coated to match curtain
Hood	Aluminum two piece square hood powder coated to match curtain
Counterbalance	Steel barrel housing counterbalance spring assembly
Operation	Manual push up
Locking	Slide bolts (interior; coil side); left and right slides
Warranty	Limited 2 year warranty for all parts, components and PowderGuard® Premium powder coat finish

Options

- Step angle bottom bar attachment
- Interior crank or electric tube motor with crank for emergency egress manual override
- Slide bolts (exterior; non-coil side) suitable for use with padlocks; left and right slides*
- Cylinder lock*
- PowderGuard® Premium powder coat in approximately 200 colors or custom colors per architect specifications

* Requires interlock with tube motor operation

^Δ Maximum height and width are independent of each other and may vary based on slat profile, material and gauge.

Cover image: Perforated slat, PowderGuard® Premium custom powder coat finish

Image above: Standard slat, Standard powder coat finish in White



Perfect for security in high pedestrian traffic areas


Heavily visited areas such as retail stores, pharmacies and hospitals often need the security that the Allura® shutter door offers as well as the flexibility in the aesthetic options to match the surrounding environment.

Allura® Model 653 is a next generation light-duty door solution that is versatile enough for specialty uses and has a space-saving design, making it perfect for installations with limited side room and headroom. Multiple perforation and fenestration options allow for many configurations with the right amount of light and air passage.



Standard slat, PowderGuard® Premium powder coat finish in Bronze

Slat style

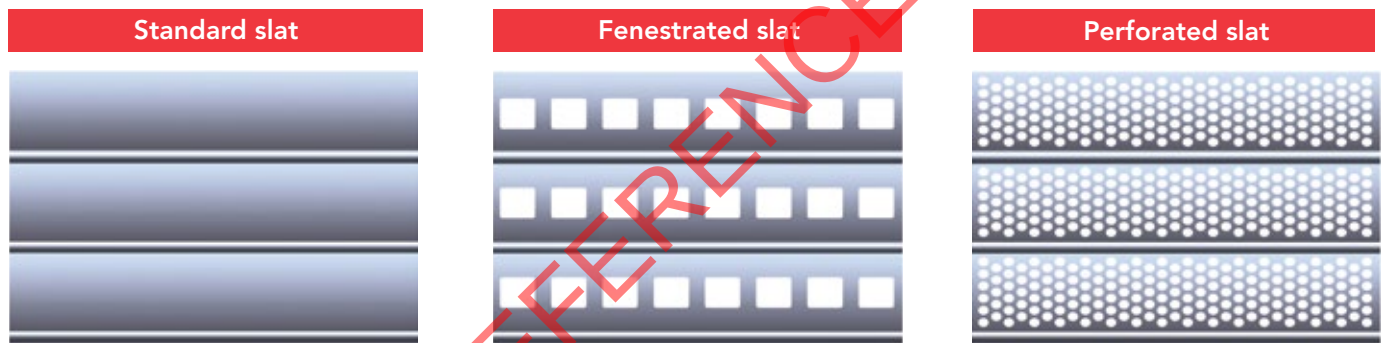

Color options

Standard powder coat finish




White



Almond



Silver*



Bronze*

* Silver and Bronze powder coat made to mimic anodized aluminum.

PowderGuard® Premium powder coat finish options are available in approximately 200 colors and can be custom matched to architect specifications.



Actual colors may vary from brochure due to fluctuations in the printing process. Always request a color sample from your Overhead Door™ Distributor for accurate color matching.



Perforated slat, PowderGuard® Premium custom powder coat finish



Architect's Corner

A resource for architects, containing comprehensive technical and resource materials to support your project, including drawings and specifications for commercial doors.

overheaddoor.com

The original, innovative choice for unequalled quality and service.

Overhead Door Corporation pioneered the upward-acting door industry, inventing the first upward-acting door in 1921 and the first electric door operator in 1926. Today, we continue to be the industry leader through the strength of our product innovation, superior craftsmanship and outstanding customer support, underscoring a legacy of quality, expertise and integrity. That's why design and construction professionals specify Overhead Door™ products more often than any other brand. Our family of over 400 Overhead Door™ Distributors across the U.S. and Canada not only share our name and logo, but also our commitment to excellence.



INDUSTRY LEADING
COMMERCIAL & INDUSTRIAL SOLUTIONS



2501 S. State Hwy. 121 Bus., Suite 200, Lewisville, TX 75067
1-800-929-DOOR • sales@overheaddoor.com
overheaddoor.com