





DCHS-35BN HIGH SCHOOL DISCUS CAGE

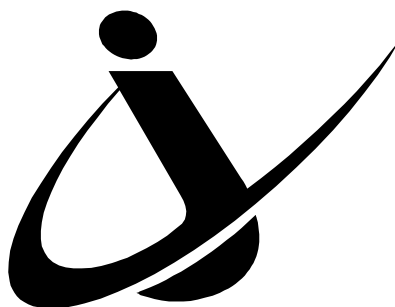

DCHS-35 6 POLE DISCUS CAGE w/ BARRIER NETTING

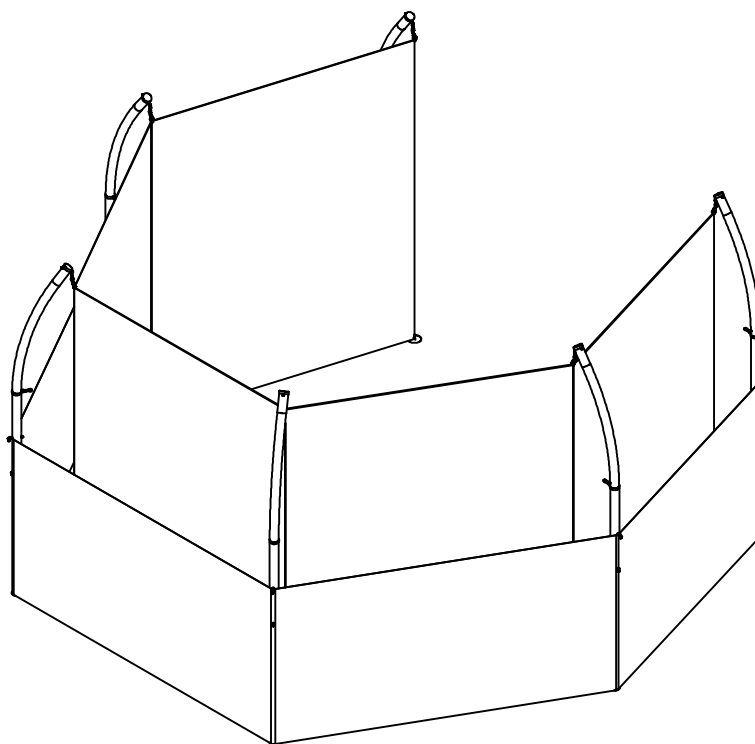

Installation and Maintenance Manual

Call Jaypro Sports at 1-800-243-0533 during
regular business hours for technical support.
www.jayprosports.com

DCHS-35BN INSTALLATION MANUAL

The Jaypro Sports DCHS-35BN 6 Pole Discus Cage with Barrier Netting is a Professional Outdoor Discus Cage System built for discus training. Its offset frame design minimizes ricochets, while individual hoist lines allow for quick installation and removal of nets. A durable, high-performance choice for schools, clubs, and training facilities.

System is comprised of 4" OD heavy duty aluminum curved poles and provides a 2' offset for added safety. Each pole is equipped with a hoist line to make the net installation quick and easy.

When installing discus cage netting for the first time out of the box, it's important to understand that the netting may appear smaller or tighter than the actual listed dimensions. This is completely normal and expected. The net needs time to relax and stretch into its true shape and size.

IMPORTANT NOTES:

1. Before each use, check equipment for proper connecting hardware and structural integrity. Replace any damaged or missing hardware immediately.
2. Use of this equipment other than intended may be hazardous.
3. Alteration or modification of this equipment may be hazardous or result in injury. For repair or replacement, contact your dealer or Jaypro Sports.
4. The poles in the DCHS-35BN are intended to be permanently installed structures. If ground sleeves are used, the poles can be removed at the end of the season if desired. If this is intended, the ground sleeves should be properly covered to prevent any debris or water from entering the sleeve (Jaypro Ground Sleeve Covers EP0008-MOD).
5. To increase the life of the netting, it is recommended to lower and remove the netting when not in use. Avoid hanging additional equipment from the netting (banners, pitching targets, screens, etc.) directly onto the netting. If attaching anything to the netting, it is recommended to anchor it directly to the rope border, not the netting, or damage may occur and void the warranty.

WARNING: OUTDOOR DISCUS CAGE USE DURING INCLEMENT WEATHER:

For your safety and to prevent damage to equipment, use of this discus cage is strictly prohibited during inclement weather. Do not use the cage during high winds or wind advisories, during or nearby thunderstorms or lightning, during snow and/or ice storms or any other severe weather warnings. If winds are forecasted to be above 50mph, the discus cage netting must be lowered to the ground or damage and / or injury may occur.

Jaypro Sports will not be held liable for any injury and/or damage that may occur if the system is not protected against any inclement weather events.

When in doubt, stay out! Safety first!



DCHS-35BN INSTALLATION MANUAL

ANNUAL MAINTENANCE / INSPECTION:

1. Confirm all components / hardware are present and in good working order. Inspect all bolted connections for tightness and replace any missing hardware or components.
2. Clean any debris, leaves, etc. from the cage netting. Remove any invasive vegetation if present.
3. Inspect the area around the cage for any obstructions that may cause discus to ricochet off the netting and cause injury. Clear the full perimeter within the poles and ensure clear walkways are outside the cage netting.
4. Inspect all the poles for any defects and/or damage. Should any defects or damage exist, contact Jaypro Sports and be prepared to send photos of the pole in question. Do not use the system until proper review and assessment is complete.
5. Inspect the area surrounding the cage system for drainage issues, erosion, and / or frost heaves. Should any of these conditions exist, contact your local building code official for corrective action.
6. Inspect the netting for broken mesh, cuts, pulls, fraying of material and discoloration indicating material aging. Nets that show deterioration from mildew, wear, or stress that may affect the strength and performance must be removed from service for repair or replacement.
7. At the end of each season, completely remove the netting for storage. Take the proper means to protect the netting from rodent damage over the winter months or long periods of storage. Store the netting in a dry environment.



DCHS-35BN INSTALLATION MANUAL

UNPACK & VERIFICATION:


Please refer to the parts list below for the specific model number and confirm all parts are present and accounted for. Report any missing and/or damaged parts to Jaypro Sports immediately before assembly. Be prepared to provide photos of the packaging.

Discus cage net is purchased separately. The recommended cage nets are as follows:

DCHS-35NET
55'L x 14'H

DCHS-BN
63'L x 7'H


ITEM	QTY	PART #	DESCRIPTION
1	6	BRC40	4"OD BAND CLAMP
2	1	CR0017	5/16" HOISTING ROPE x 56 FT
3	6	CR0017	5/16" HOISTING ROPE x 20 FT
4	6	EP0027	4" BLACK PLASTIC PIPE CAP
5	6	FG5143	12" VELCRO TIE STRAP
6	12	HB5012	3/8-16 x 5" EYEBOLT ZP
7	6	HB5076	3/8-16 x 1-1/4" CARRIAGE BOLT
8	6	HB5108	3/8-16 x 2-1/2" EYEBOLT ZP
9	6	HB5109	3/8-16 THREADED EXPANSION ANCHOR ZP
10	4	HM240	1 1/4 D-RING
11	12	HM4111	1" SWIVEL PULLEY
12	30	HM5054	5/16 x 3-1/8" SNAP HOOK ZP
13	8	HM6078	1/4"CABLE CLAMP
14	2	HM6079	1/4"CABLE THIMBLE
15	6	HM6331	GALV ROPE CLEAT
16	6	HN1230	3/8-16 THIN NYLON LOCK NUT ZP
17	12	HN256	1/4-20 NYLON LOCK NUT ZP
18	12	HN265	3/8-16 NYLON LOCK NUT ZP
19	12	HS5077	1/4 - 20 x 5-1/2" SCREW ZP
20	6	HS5247	3/8-16 x 1" SCREW
21	30	HW2050	3/8" WASHER ZP
22	12	HW2093	1/4" WASHER ZP
23	1 @ 56'	RC5004	3/16" GALV AIRCRAFT CABLES
24	50	RP5013	HEAVY DUTY BLACK ZIP TIES
25	1	DCHS-6S	GROUND SLEEVES (SET OF 6)
26	50	DCHS-35P	H.S. DISCUS POLE

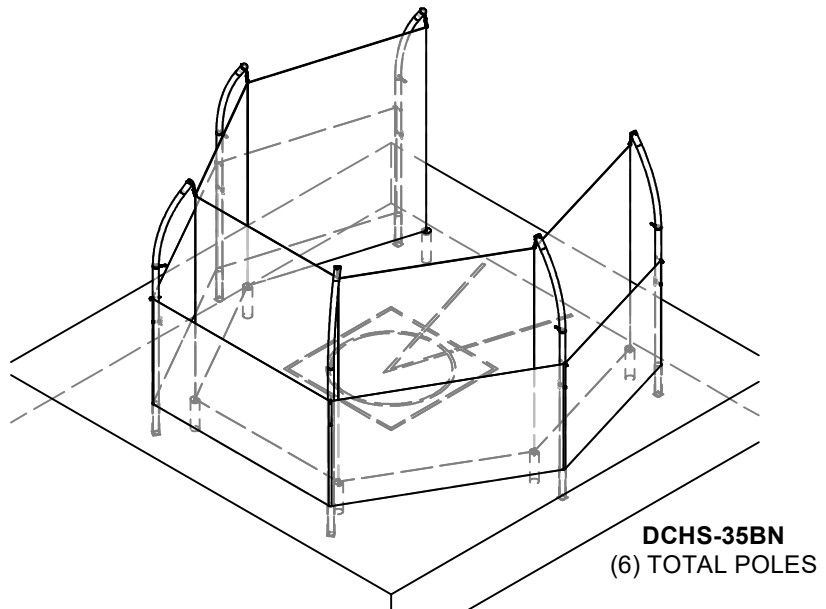

DCHS-35BN INSTALLATION MANUAL


INSTALLATION INSTRUCTIONS:

1. Select a site for the cage frame that is flat and clear of obstructions. The ground should be level and free of debris.
2. Layout the ground sleeves as shown and dimensioned below. If using a different size netting than typical, fully review and understand the sleeve locations and correlate them to the netting size.

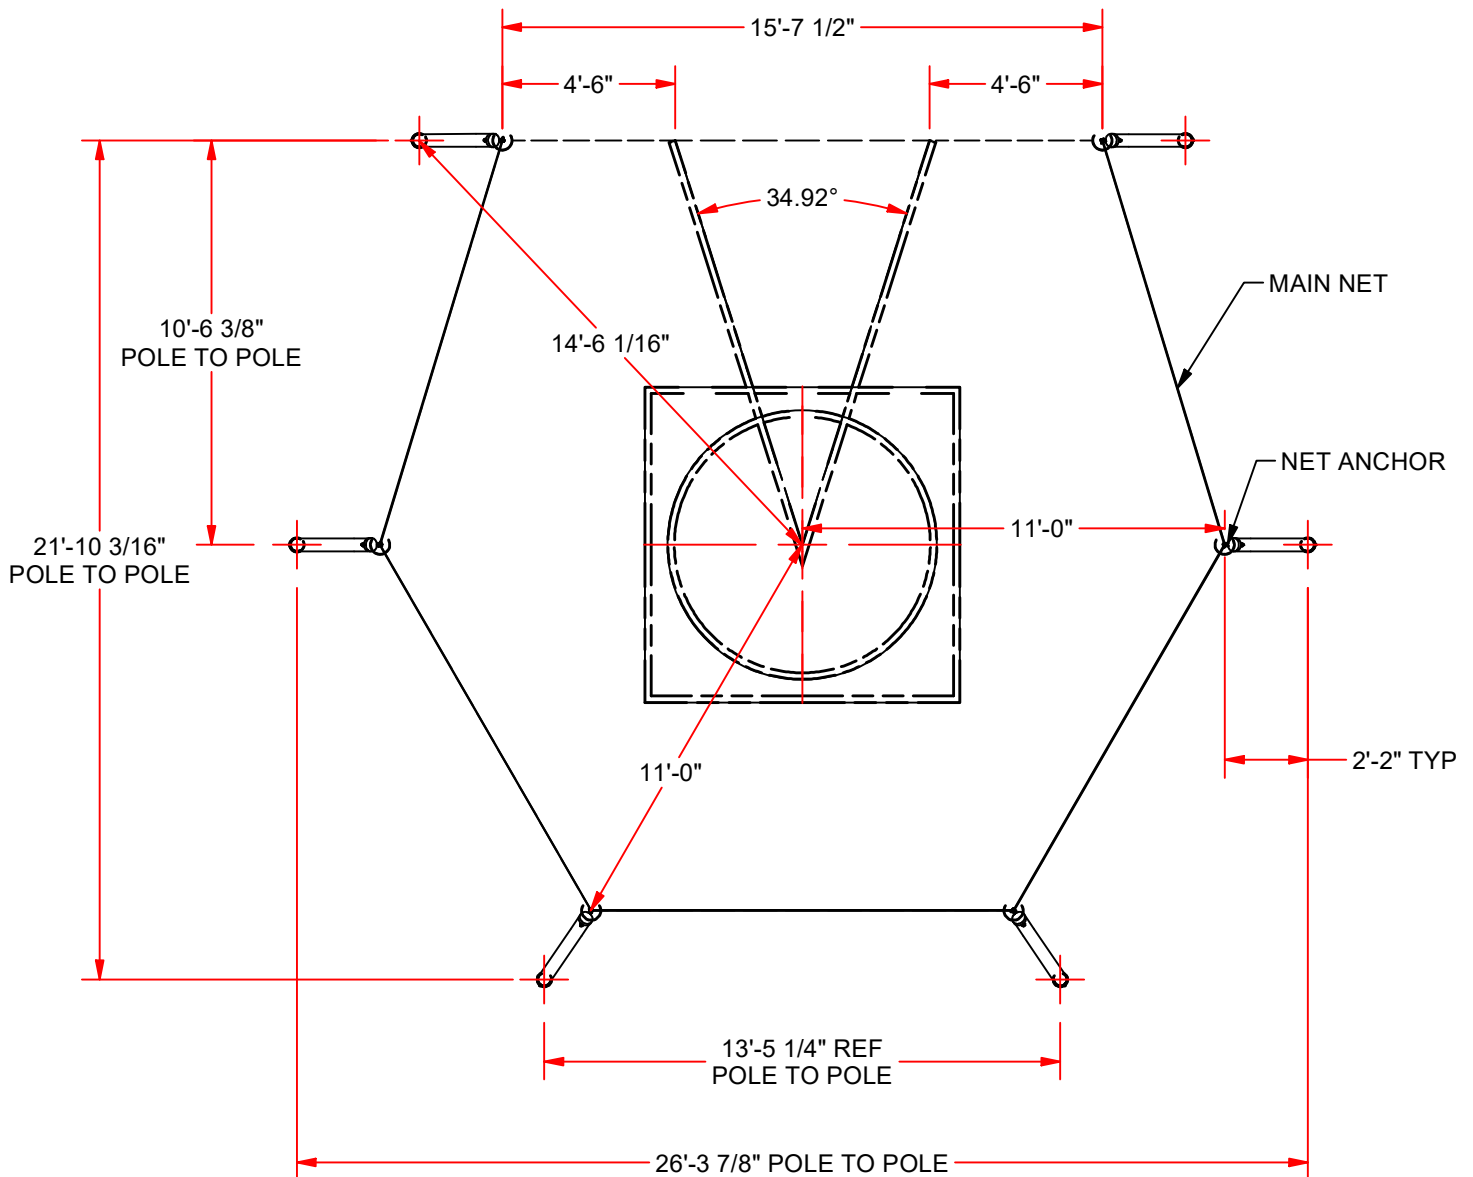


DCHS-35BN INSTALLATION MANUAL

3. Dig footing holes and install ground sleeves as shown below. Ground sleeves are supplied with the discus cage to allow removal or replacement of the poles. If this is not desired, poles can be directly embedded into concrete. Allow the concrete to fully cure before using the cage.

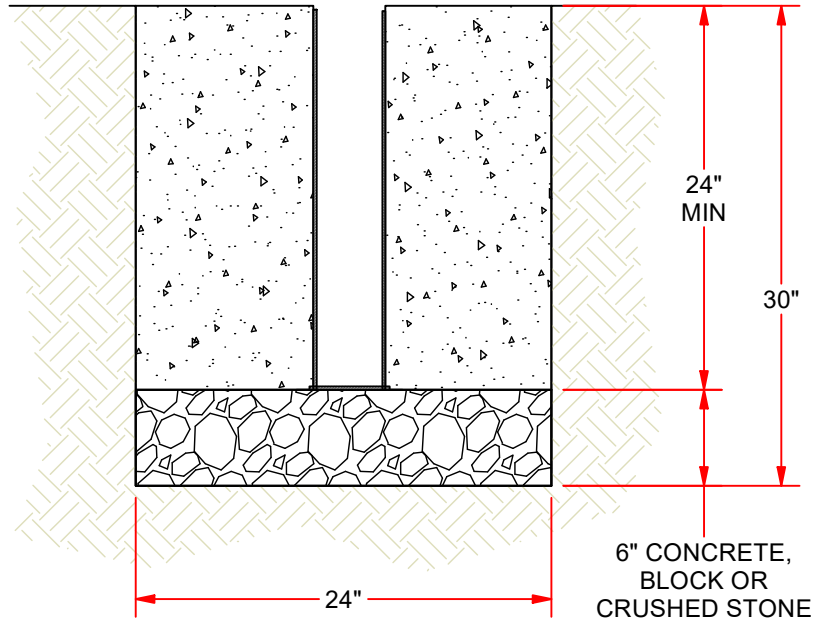

FOOTING DETAIL

4. Dig anchor footing holes. Pour the anchor footing and let concrete fully cure. Using an 11/16" drill bit, drill a hole to install the expansion anchor. Insert the eyebolt and tighten down the jam nut as shown below.

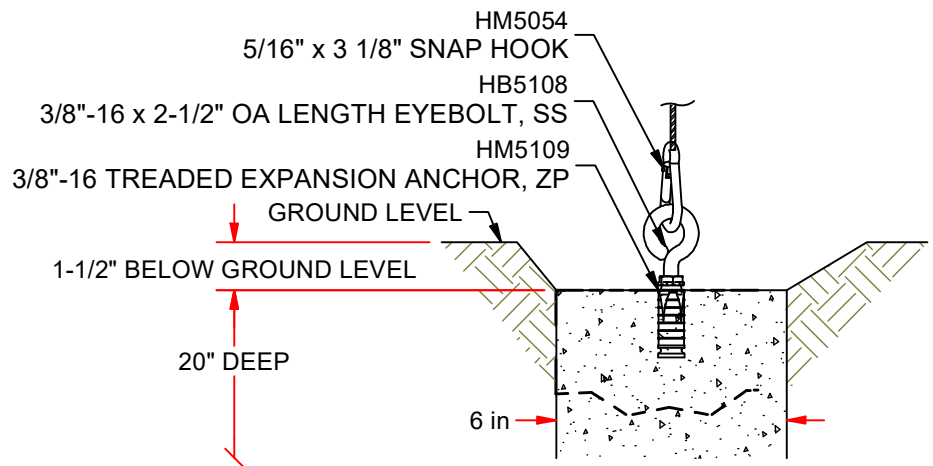


WARNING: Check Local Building Codes Before Installing Foundation

The dimensions provided are based on typical soil conditions and are for general guidance only. Before beginning any footing installation, consult your local building codes, as requirements may vary by location. If local codes specify stricter standards, those must be followed. Always ensure your installation is safe, legal, and fully code-compliant.



DCHS-35BN INSTALLATION MANUAL

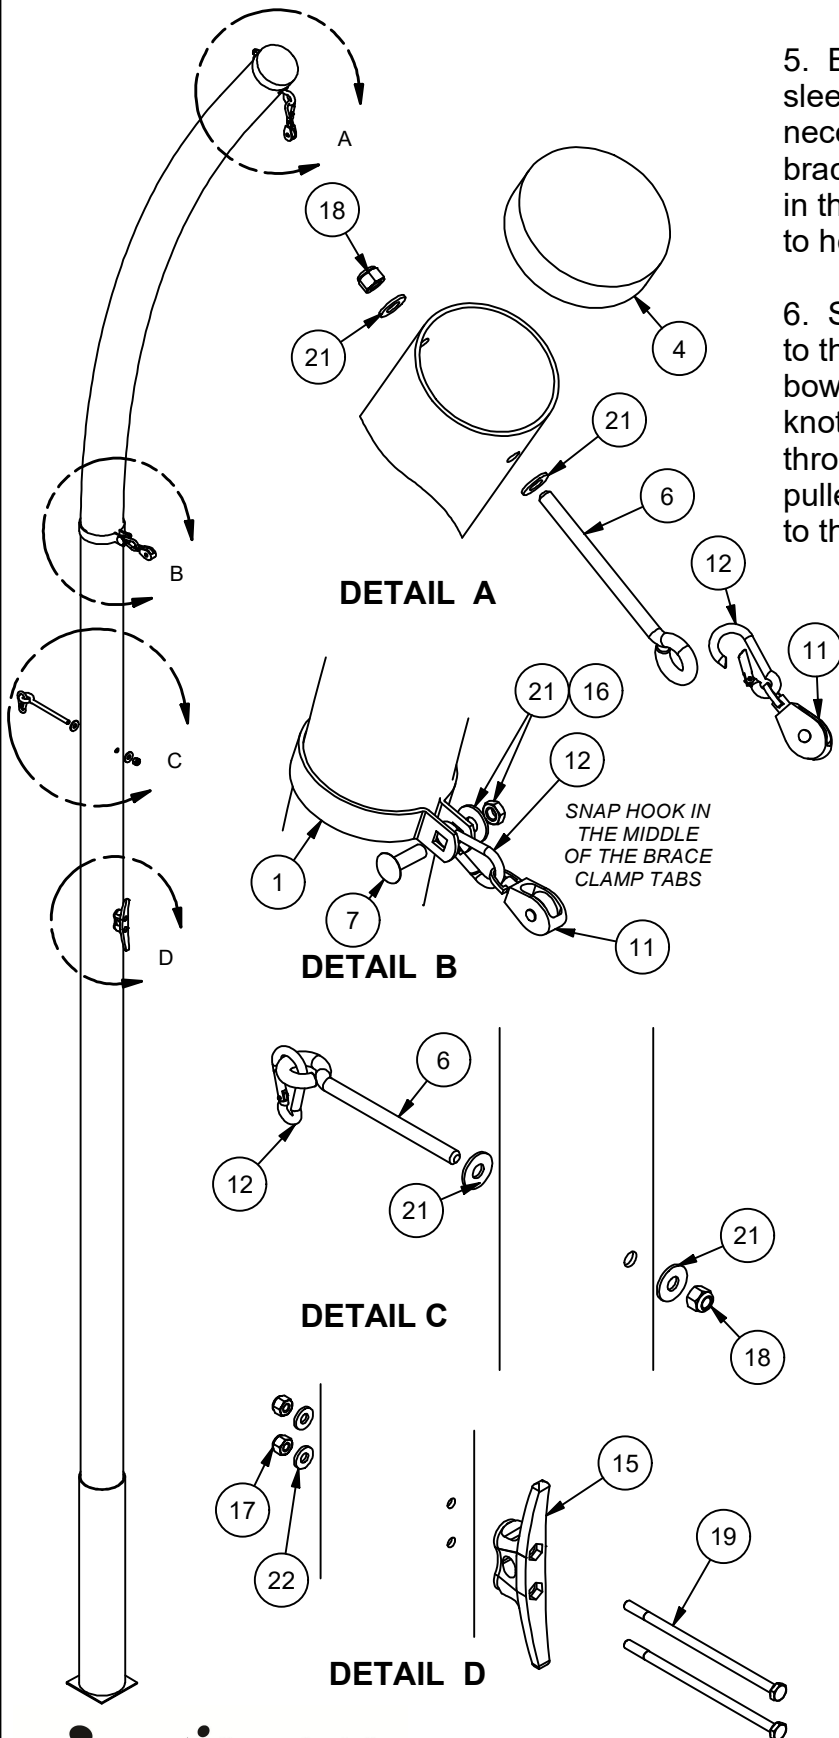

DETAIL A


DETAIL B

DETAIL C

DETAIL D

5. Before inserting the poles in the ground sleeves, assemble each pole with the necessary hardware. The intermediate brace clamp and pulley is intended on being in the middle of the cleat and upper eyebolt to help keep the hoist rope tight to the pole.

6. Secure the snap hook to the hoist rope with a bow line knot, or similar knot. Run the rope through the upper pulleys and secure to the rope cleat.

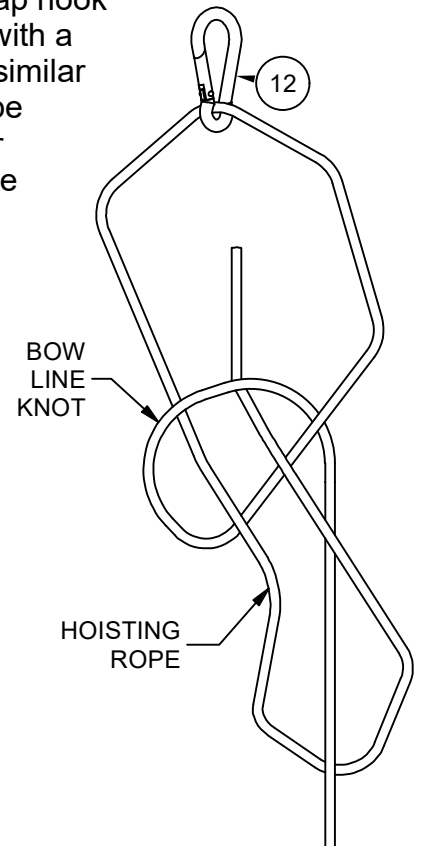

BOW
LINE
KNOT

HOISTING
ROPE


ITEM	PART #	DESCRIPTION
1	BRC40	4"OD BAND CLAMP
4	EP0027	4" BLACK PLASTIC PIPE CAP
6	HB5012	3/8-16 x 5" EYEBOLT ZP
7	HB5076	3/8-16 x 1-1/4" CARRIAGE BOLT ZP
11	HM4111	1" SWIVEL PULLEY
12	HM5054	5/16 x 3-1/8" SNAP HOOK
15	HM6331	GALV ROPE CLEAT
16	HN1230	3/8-16 THIN NYLON LOCK NUT ZP
17	HN256	1/4-20 NYLON LOCK NUT ZP
18	HN265	3/8-16 NYLON LOCK NUT ZP
19	HS5077	1/4 - 20 x 5-1/2" SCREW ZP
21	HW2050	3/8" WASHER ZP
22	HW2093	1/4" WASHER ZP



DCHS-35BN INSTALLATION MANUAL

7. Insert a pole in each sleeve.

8. Make up the ends of the cable as shown below. The cables should measure roughly 56' from thimble to thimble. When terminating the cable end, the saddle for the cable clamp should be on the live end of the cable, not the dead end cable tail.

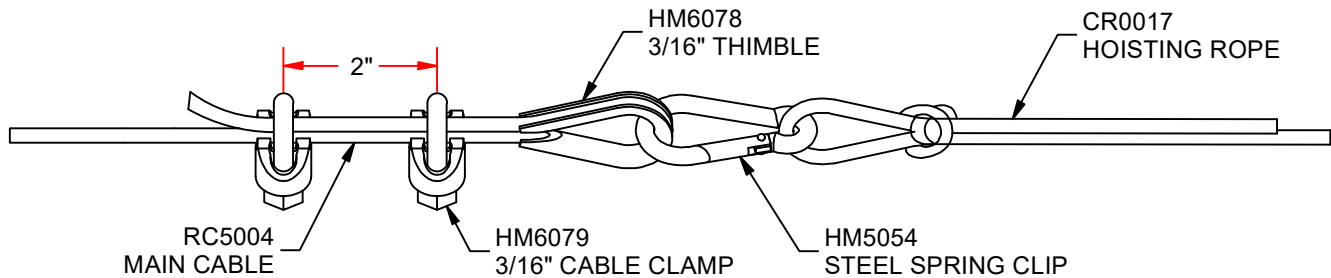

9. Roll out the net inside the frame and locate the ends.

10. Lay the cable along the top outer rope border of the netting. Attach a cable to both ends of the netting with the zip ties supplied, you may need to adjust where the intermediate hoisting ropes are attached. Once secured, clip the tails off from the zip ties.


11. Lower the hoisting ropes on the 2 end poles and attach the snap hooks directly to the cable thimbles at the end of the cables. Evenly raise the net up to its maximum height.

12. Lower the middle hoisting ropes and attach the spring clips to the cable directly in line with each pole.

13. Once net is fully raised, secure the bottom edge of the net to the ground anchor snap hooks.

14a. **Initial Set-Up:** Evenly raise the net to its maximum height. Once the net is fully raised, secure the bottom edge of the net to the ground anchor snap hooks. You may need to adjust where the intermediate hoisting ropes are attached, from one side of a zip tie to the other. Adjust the position of the net so it is centered within the poles. Double check that all the hoisting ropes are in line with the corresponding ground anchor. With the net location and hoist connection points calibrated, lower the net to about 4 ft above the ground and attach a D-ring at each intermediate attachment point, as shown below. This will make future installation of the net a snap. Attach the spring clip onto the D-ring. Reconnect the hoist lines to the D-rings moving forward.


14b. **Routine Set-up:** Connect both end hoist cables to the cable thimbles. Raise the netting up 4 to 5 feet above the ground. Next, connect all the middle hoist cables to the D-rings. Raise the netting to the desired height and secure the hoist rope to the cleat. Once the net is fully raised, secure the bottom edge of the net to the ground anchor snap hooks.

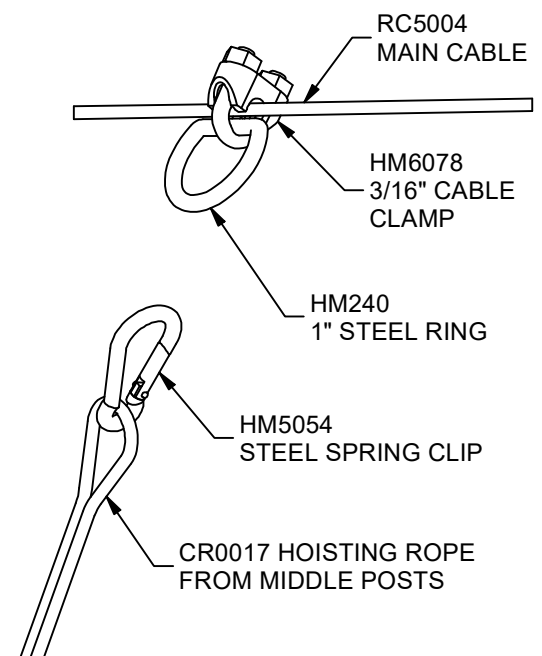

DCHS-35BN INSTALLATION MANUAL


15. Roll out barrier net outside the cage and locate the ends.

16a. Attach the top edge of the barrier net with snap hooks at each end pole location as shown below.

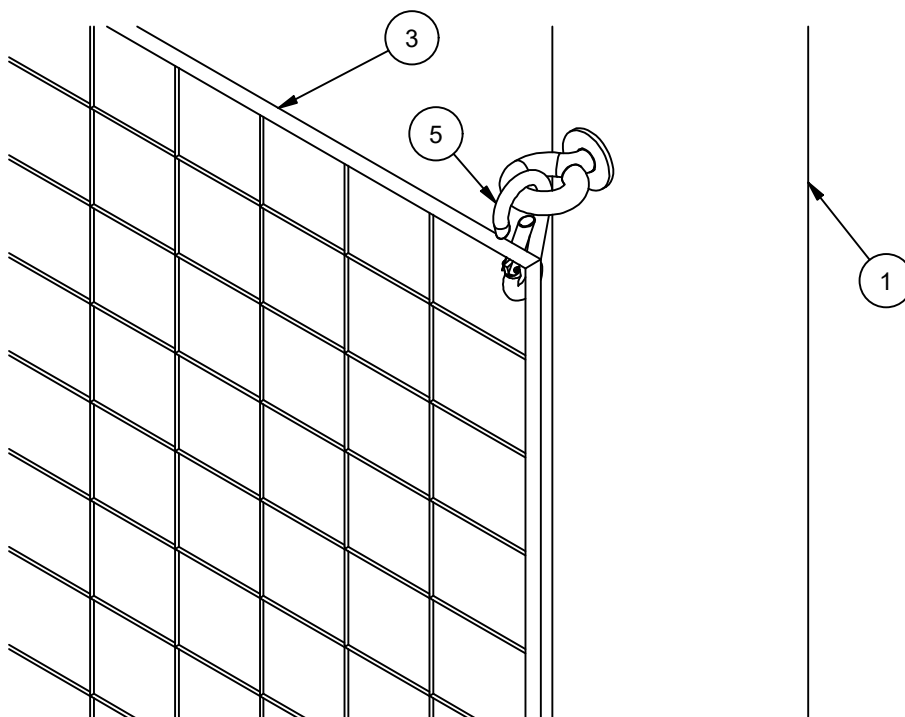

16b. Once barrier netting is secured to end poles, repeat at each middle pole, snap hook attachment location may be adjusted as needed.

17. Once all snap hooks are secured, secure the barrier netting to the bottom edge of each pole with 12" Velcro tie straps as shown below.

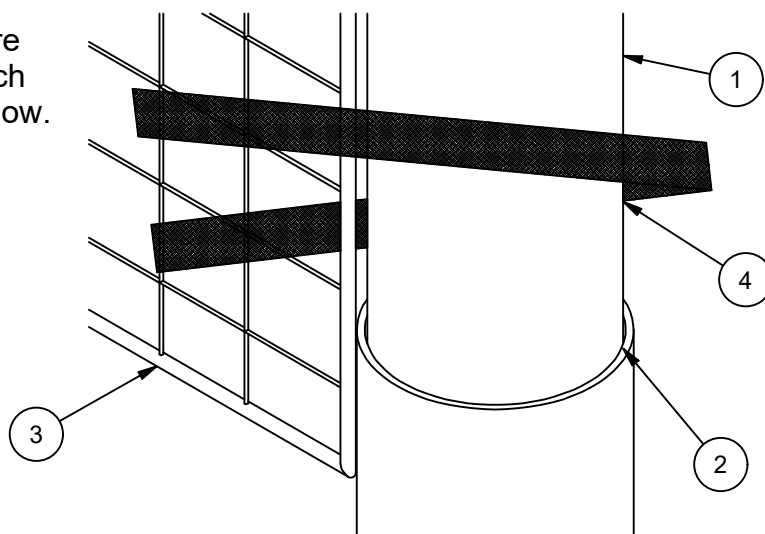

ITEM	PART #	DESCRIPTION
1	DCHS-35P	H.S. DISCUS POLE
2	DCHS-6S	GROUND SLEEVES (SET OF 6)
3	DCHS-BN	DISCUS BARRIER NET
4	FG5143	12" VELCRO TIE STRAP
5	HM5054	5/16 x 3-1/8" SNAP HOOK




DCHS-35BN INSTALLATION MANUAL


15. Roll out barrier net outside the cage and locate the ends.

16a. Attach the top edge of the barrier net with snap hooks at each end pole location as shown below.


16b. Once barrier netting is secured to end poles, repeat at each middle pole, snap hook attachment location may be adjusted as needed.

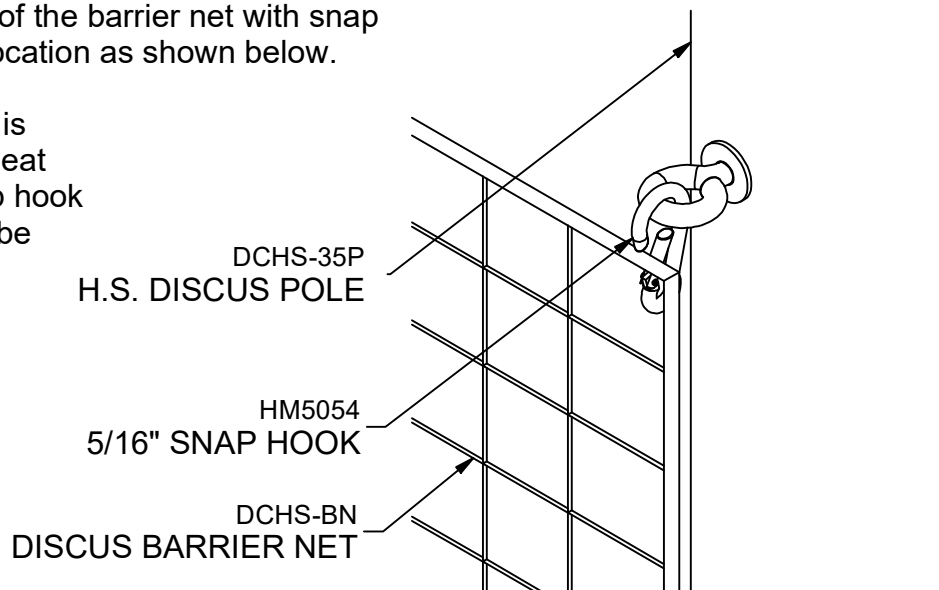

17. Once all snap hooks are secured, secure the barrier netting to the bottom edge of each pole with 12" Velcro tie straps as shown below.

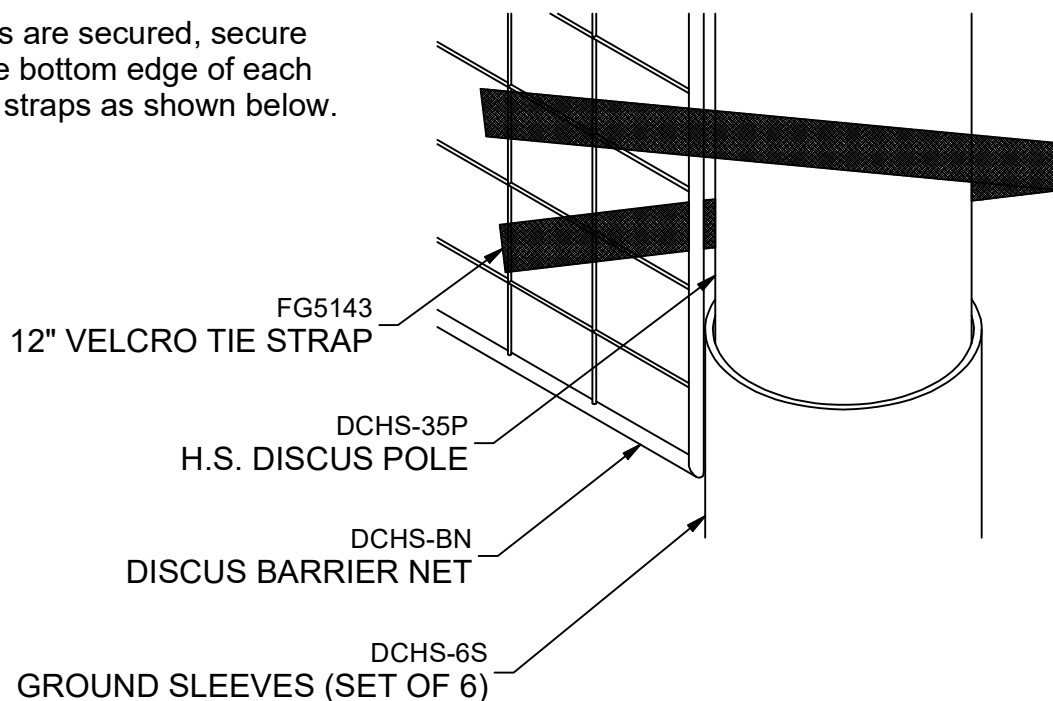

DCHS-35BN HIGH SCHOOL DISCUS CAGE

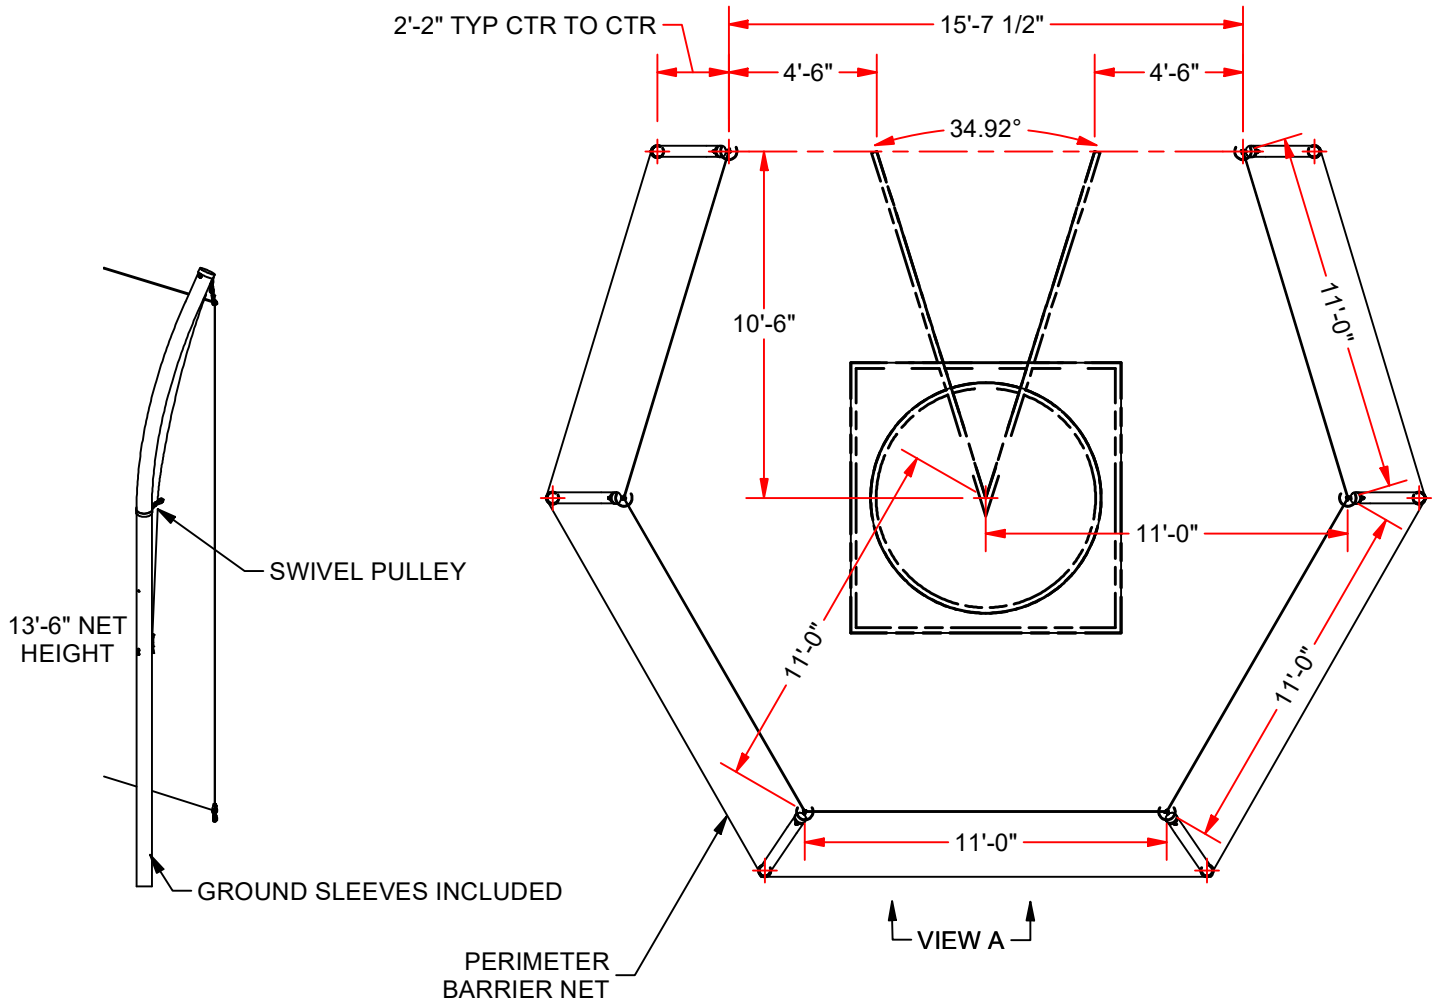


FEATURES:

- > MEETS NFHS RULES
- > ACCOMMODATES THROWING SECTOR AT 34.92°
- > INDIVIDUAL SWIVEL PULLEY HOIST SYSTEM PER POLE
- > SIX POLES ARE CURVED TO PROVIDE 2 FT OFFSET
- > TOP OF NET ATTACHED TO 1/4" VINYL COATED CABLE FOR SUPPORT.
- > PERIMETER BARRIER 7'-0" NET HEIGHT (DCHS-BN)
- > 4" O.D. x 0.125" WALL ALUMINUM POLE CONSTRUCTION
- > MILL FINISH OR POWDER COT BLACK FINISH
- > CORROSION RESISTANT HARDWARE
- > HEAVY-DUTY WEATHER TREATED 1-7/8" #42 NYLON MESH BLACK NET
- > NET BREAKING STRENGTH OF OVER 320 lbs.

OPTIONAL:

- > GROUND SLEEVES& COVER (DCHS-6S)

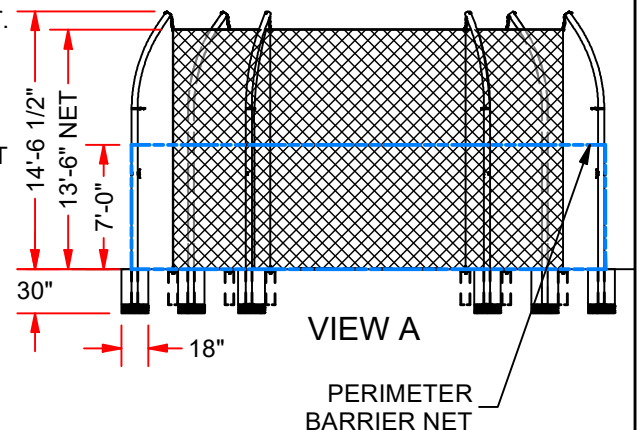

DCHS-35BN

HIGH SCHOOL DISCUS CAGE w/ BARRIER NET


© COPYRIGHT 2025 JAYPRO SPORTS, LLC. ALL RIGHTS RESERVED THIS PRINT IS THE PROPERTY OF JAYPRO SPORTS, LLC. AND MAY NOT BE REPRODUCED WITHOUT WRITTEN PERMISSION

www.jayprosports.com
(800) 243-0533
976 Hartford Turnpike
Waterford, CT 06385 USA

Rev:

SHEET 1 OF 1

FIELDPRO HS DISCUS CAGE GROUND SLEEVE

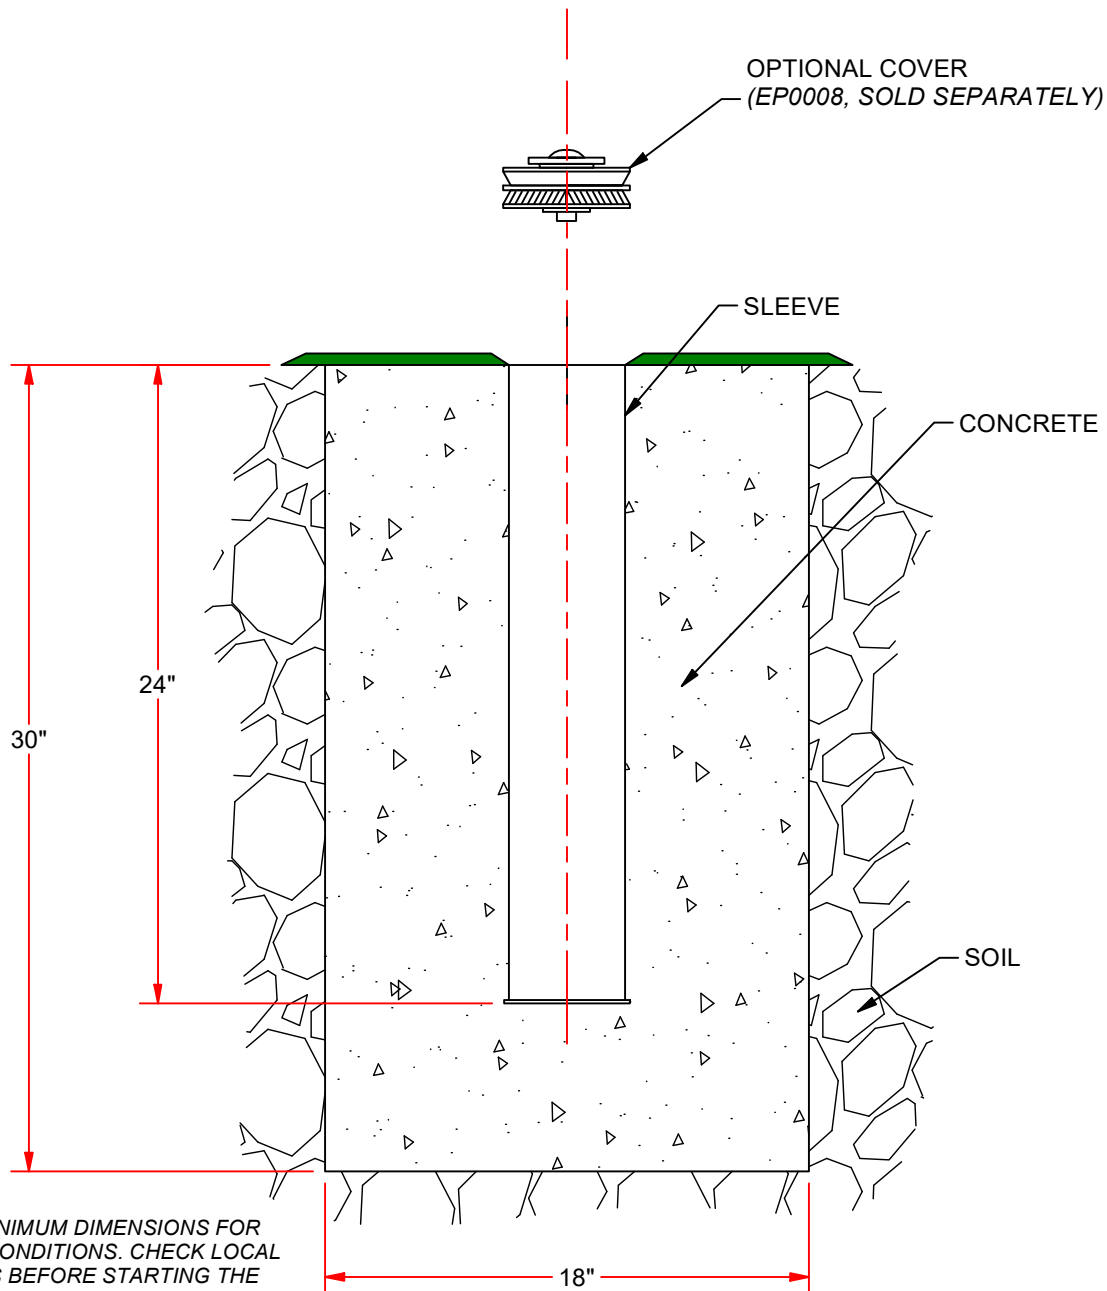

NOTE:
1) THESE ARE MINIMUM DIMENSIONS FOR AVERAGE SOIL CONDITIONS. CHECK LOCAL BUILDING CODES BEFORE STARTING THE FOOTING, AS BUILDING CODES MAY VARY. LOCAL BUILDING CODES SHOULD BE ADHERED TO IF REQUIREMENTS ARE GREATER THAN THOSE OUTLINED HERE.

FEATURES:
> ALUMINUM GROUND SLEEVE
> FITS 4" OD POLES
> KIT INCLUDES SET OF 6
> LOCKING COVER EP0008 SOLD SEPARATELY



DCHS-6S

FIELDPRO HS DISCUS CAGE GROUND SLEEVE

© COPYRIGHT 2023 JAYPRO SPORTS, LLC. ALL RIGHTS RESERVED THIS PRINT IS THE PROPERTY OF JAYPRO SPORTS, LLC. AND MAY NOT BE REPRODUCED WITHOUT WRITTEN PERMISSION


www.jaypro.com
(800) 243-0533
976 Hartford Turnpike
Waterford, CT 06385 USA

Rev:

SHEET 1 OF 1



DISCUS ANGLED ALUMINUM DISCUS RING

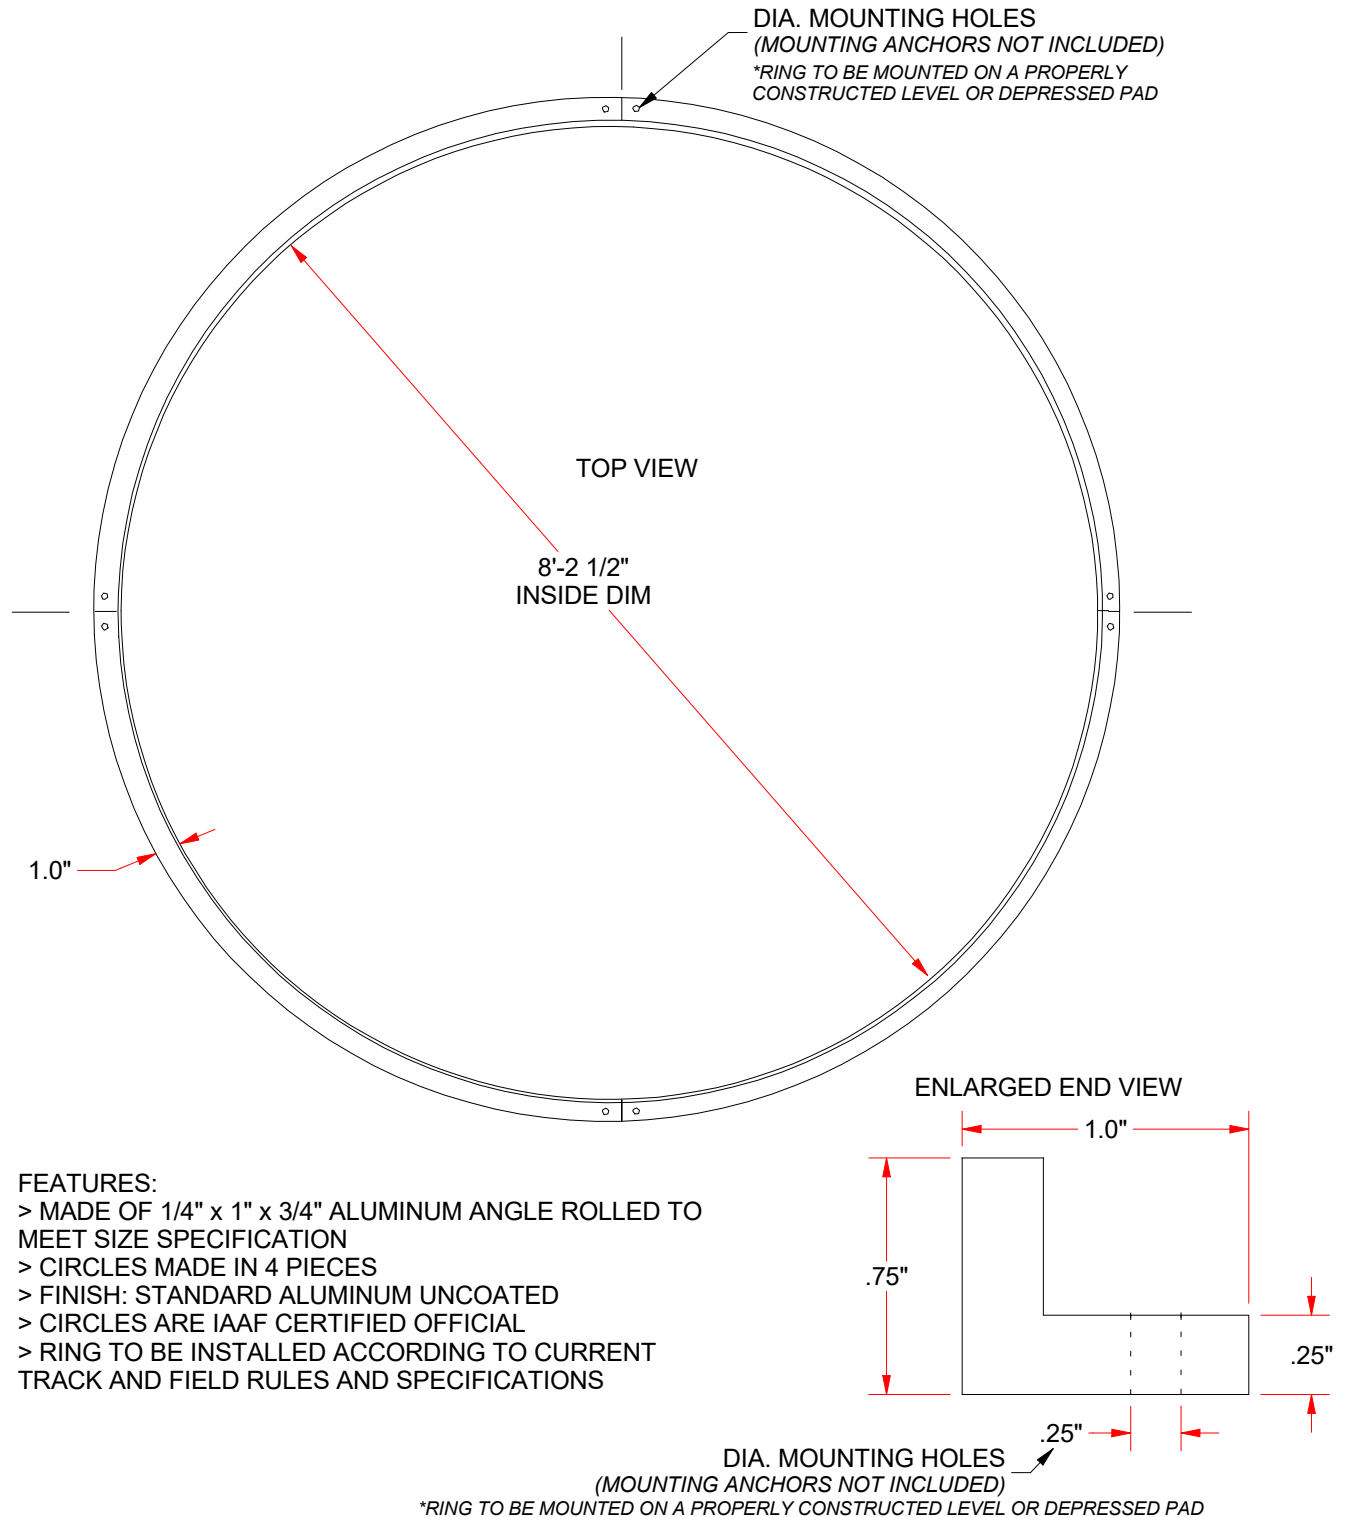

FEATURES:

- > MADE OF 1/4" x 1" x 3/4" ALUMINUM ANGLE ROLLED TO MEET SIZE SPECIFICATION
- > CIRCLES MADE IN 4 PIECES
- > FINISH: STANDARD ALUMINUM UNCOATED
- > CIRCLES ARE IAAF CERTIFIED OFFICIAL
- > RING TO BE INSTALLED ACCORDING TO CURRENT TRACK AND FIELD RULES AND SPECIFICATIONS

*NOTE: WE RECOMMEND INSTALLATION BE DONE BY A QUALIFIED CONTRACTOR, FAMILIAR WITH ALL CODES, LAWS, REGULATIONS AND TRACK & FIELD CONSTRUCTION.



TFDR

DISCUS ANGLED ALUMINUM DISCUS RING

© COPYRIGHT 2017 JAYPRO SPORTS, LLC. ALL RIGHTS RESERVED
THIS PRINT IS THE PROPERTY OF JAYPRO SPORTS, LLC. AND MAY
NOT BE REPRODUCED WITHOUT WRITTEN PERMISSION

www.jaypro.com
(800) 243-0533
976 Hartford Turnpike
Waterford, CT 06385 USA

Sheet 1 of 1