LUBRI

BEST OF LUBICAMT

ENGINE OILS

& LUBRICANTS



LUBRI
BEST OF LUBICAMT

BULK STORAGE

We hold a various base stocks and additives so much so that we supply a number of local and international blenders with these materials.

Ready products are stored for only a limited period of time- usually no longer than 1 week. We manufacture and ship almost immediately to avoid congestion and virtual wamhousing costs.

Our warehouse is handies by the fulfilment department which works closely with logistics and finances to ensure the timely and correct shipping and delivery of goods.



عبوة بلاستيك
5 لتر



عبوة بلاستيك
4 لتر



عبوة بلاستيك
1 لتر



جالون
20
لتر

برميل حديد
208 لتر



جالون
60
لتر



LUBRI
BEST OF LUBICANT

ABOUT US

Lubri is a egyptian company stublished in 2017 ,specialized in lubricants solutions to fill the gap between the high end products with very high prices ,and the low quality products ,to provide the market with a very unique product, with a very featured and reasonable price thats why we hired a professional team that have a huge exprience in our sector to achieve this equation immediately like no one does before.

OUR VISION

We strive to expand our global export reach, ensuring accessibility everywhere. Our aim is to maintain our competitive pricing, which sets us apart significantly. Our goal is continuous advancement while preserving the quality of our products, ensuring that your new engine maintains its performance even after years of use, and to become one of the largest companies in this sector worldwide.

OUR MISSION

Our market is competitive, with many excellent brands, but we always strive to be the best We treat our customers as partners in business and success. Here, our success means the success of local products over others, proving their quality with extremely competitive value compared to other brands.



OUR LABORATORY

Quality assessment for raw materials and finished products.

Research of manufactured products and competitors.

Development on new more effective and cost-efficient products in line with international trends in science and tribology.

Accurate measurements down to a millionth of a particle.

-Completely autonomous structure within the company Tests performed based on international standards.

-Reliable results.

Research and development capabilities.

The ability to perform tests associated with all parameters of petro-chemicals, particularly lubricants.

-Total investment: **6 million USD**





"The laboratory is an integral part of our company. In the past it has been the primary reason for our successes, and wonderful place to start a journey of learning and developing."

International Organization for Standardization

OUR BRANDS

Lubri aims to increase brand penetration and continue to offer excellent lubricants and additives packs to customers, and compliment its efforts with excellent customer service. Our strategy is to cover majority of the EMEA countries by 2028.


Lubri has just launched with a small presence in the area, however experience shows that due its fair pricing and quality the brand will incite repeat orders and form operations in various countries in the following years.

We are a company dedicated to sustained growth.
Repeat orders, and maintaining relations with customers is our forte. After all, we don't want to just sell a product, we aim to be your trusted partner.

We are a responsible procurer of materials.
The whole process starting with procurement, all the way to delivery is systemised and trackable.
We are transparent, and our team remains highly accountable.

We make low emission and low fuel usage products.
Apart from this we minimise our carbon footprint by giving back to the environment and using only electric equipment in manufacturing and loading.



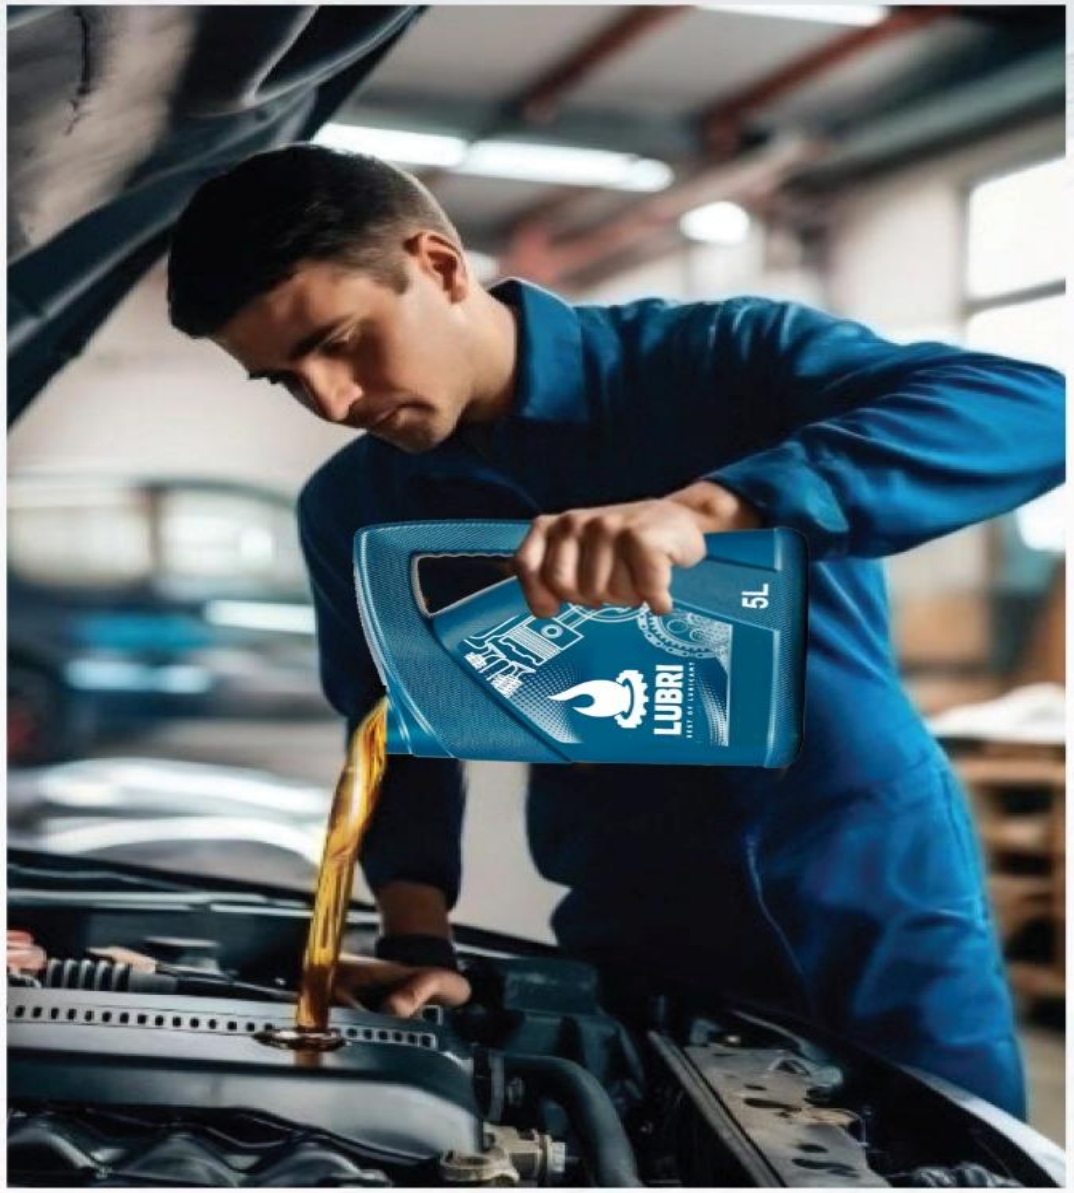

LUBRI
BEST OF LUBICANT

Lubri API SN SAE 10W40

Synthetic motor oil engineered to provide excellent performance under an extensive range of conditions. Formulated to give you the confidence of protection beyond that of conventional oils up to 10000, we particularly recommend this product if you occasionally experience demanding driving conditions where it can help combat the damage caused by high engine stress. Recommended for Gasoline engines.

TEST	Method	Result	Unit
Appearance	ASTM D 1524	Clear and Bright	
Color	ASTM D 1500	2	
SP.gr@15C	ASTM D 1298	0.900	
Flash Point	ASTM D 92	220	C.
Pour Point	ASTM D 97	-30	C.
Viscosity @40C	ASTM D 445	95	Cst
Viscosity @100C	ASTM D 445	14.3	Cst
Viscosity Index	ASTM D 2270	155	
TBN NUMBER	ASTM D 974	10	MG KOH\g



Lubri API SL SAE 15W50

High performance engine oil for all types of cars, providing superior engine protection up to 5000 km. Anti-wear and heat-activated molecules protect the engine from wear and corrosion, ensuring long engine life.

TEST	Method	Result	Unit
Appearance	ASTM D 1524	Clear and Bright	
Color	ASTM D 1500	2.5	
SP.gr@15C	ASTM D 1298	0.885	
Flash Point	ASTM D 92	235	C.
Pour Point	ASTM D 97	-20	C.
Viscosity @40C	ASTM D 445	162	Cst
Viscosity @100C	ASTM D 445	18.25	Cst
Viscosity Index	ASTM D 2270	126	
TBN NUMBER	ASTM D 974	10	MG KOH\g



Lubri API SJ SAE 20W50

Total Protection is a high performance diesel engine oil that provides excellent lubrication for modern diesel engines to extend engine life. This product meets the requirements of most engine manufacturers and the high performance of the oil has been proven in a wide variety of trucks and transport fleets of different types.

TEST	Method	Result	Unit
Appearance	ASTM D 1524	Clear and Bright	
Color	ASTM D 1500	2.5	
SP.gr@15C	ASTM D 1298	0.885	
Flash Point	ASTM D 92	235	C.
Pour Point	ASTM D 97	-20	C.
Viscosity @40C	ASTM D 445	162	Cst
Viscosity @100C	ASTM D 445	18.25	Cst
Viscosity Index	ASTM D 2270	126	
TBN NUMBER	ASTM D 974	8.5	MG KOH\g



Lubri API C14 SAE 15W40

Total Protection is a high performance diesel engine oil that provides excellent lubrication for modern diesel engines to extend engine life. This product meets the requirements of most engine manufacturers and the high performance of the oil has been proven in a wide variety of trucks and transport fleets of different types.

TEST	Method	Result	Unit
Appearance	ASTM D 1524	Clear and Bright	
Color	ASTM D 1500	2.5	
SP.gr@15C	ASTM D 1298	0.900	
Flash Point	ASTM D 92	240	C.
Pour Point	ASTM D 97	-20	C.
Viscosity @40C	ASTM D 445	128	Cst
Viscosity @100C	ASTM D 445	15	Cst
Viscosity Index	ASTM D 2270	120	
TBN NUMBER	ASTM D 974	11	MG KOH\g



Lubri API CH4 SAE 20W50

Total Protection is a high performance diesel engine oil that provides excellent lubrication for modern diesel engines to extend engine life. This product meets the requirements of most engine manufacturers and the high performance of the oil has been proven in a wide variety of trucks and transport fleets of different types.

TEST	Method	Result	Unit
Appearance	ASTM D 1524	Clear and Bright	
Color	ASTM D 1500	3	
SP.gr@15C	ASTM D 1298	0.885	
Flash Point	ASTM D 92	235	C.
Pour Point	ASTM D 97	-20	C.
Viscosity @40C	ASTM D 445	162	Cst
Viscosity @100C	ASTM D 445	18.25	Cst
Viscosity Index	ASTM D 2270	126	
TBN NUMBER	ASTM D 974	11	MG KOH\g



Lubri API CF SAE 50

It is an excellent single-grade diesel engine oil made from advanced technology base oils and a balanced additive system. It is specially designed for performance in heavy-duty engines.

TEST	Method	Result	Unit
Appearance	ASTM D 1524	Clear and Bright	
Color	ASTM D 1500	3.6	
SP.gr@15C	ASTM D 1298	0.875	
Flash Point	ASTM D 92	240	C.
Pour Point	ASTM D 97	-8	C.
Viscosity @40C	ASTM D 445	215	Cst
Viscosity @100C	ASTM D 445	21.5	Cst
Viscosity Index	ASTM D 2270	125	
TBN NUMBER	ASTM D 974	8.5	MG KOH\g



LUBRI
BEST OF LUBICAMT

Lubri API CD SAE 50

It is an excellent single-grade diesel engine oil made from advanced technology base oils and a balanced additive system. It is specially designed for performance in heavy-duty engines.

TEST	Method	Result	Unit
Appearance	ASTM D 1524	Clear and Bright	
Color	ASTM D 1500	3.6	
SP.gr@15C	ASTM D 1298	0.875	
Flash Point	ASTM D 92	230	C.
Pour Point	ASTM D 97	-8	C.
Viscosity @40C	ASTM D 445	215	Cst
Viscosity @100C	ASTM D 445	21.5	Cst
Viscosity Index	ASTM D 2270	125	
TBN NUMBER	ASTM D 974	5.25	MG KOH\g



Lubri 4T API SL SAE 20W50

It is an advanced four-stroke engine oil. This product helps provide superior performance in modern high-performance motorcycles. It also helps keep four-stroke engines running clean and provides protection even in extreme operating conditions.

TEST	Method	Result	Unit
Appearance	ASTM D 1524	Clear and Bright	
Color	ASTM D 1500	2.5	
SP.gr@15C	ASTM D 1298	0.885	
Flash Point	ASTM D 92	235	C.
Pour Point	ASTM D 97	-20	C.
Viscosity @40C	ASTM D 445	162	Cst
Viscosity @100C	ASTM D 445	18.25	Cst
Viscosity Index	ASTM D 2270	126	
TBN NUMBER	ASTM D 974	10	MG KOH\g



Lubri GEAR OIL GL4 140

is high performance, heavy duty gear lubricant formulated from high performance base oils and an advanced additive system. This lubricants arelt is engineered for automotive applications including heavy duty axles and final drives where extreme pressures and shock loading are expected

TEST	Method	Result	Unit
Appearance	ASTM D 1524	Clear and Bright	
Color	ASTM D 1500	3.5	
SP.gr@15C	ASTM D 1298	0.880	
Flash Point	ASTM D 92	235	C.
Pour Point	ASTM D 97	-15	C.
Viscosity @40C	ASTM D 445	250	Cst
Viscosity @100C	ASTM D 445	28	Cst
Viscosity Index	ASTM D 2270	147	



Lubri HYD 68

Hydraulic oil is a good quality anti-wear hydraulic oil intended for industrial and mobile service applications, subjected to moderate operating conditions and requiring anti-wear lubricants.

TEST	Method	Result	Unit
Appearance	ASTM D 1524	Clear and Bright	
Color	ASTM D 1500	1.8	
SP.gr@15C	ASTM D 1298	0.880	
Flash Point	ASTM D 92	215	C.
Pour Point	ASTM D 97	-15	C.
Viscosity @40C	ASTM D 445	67	Cst



Lubri ATF DX III

is recommended for most passenger car and commercial automatic transmissions. It is also suitable for power steering systems, hydraulic applications and some manual transmissions where an automatic transmission fluid is specified.

TEST	Method	Result	Unit
Appearance	ASTM D 1524	Clear and Bright	
Color	ASTM D 1500	6	
SP.gr@15C	ASTM D 1298	0.875	
Flash Point	ASTM D 92	200	C.
Pour Point	ASTM D 97	-35	C.
Viscosity @40C	ASTM D 445	40	Cst
Viscosity @100C	ASTM D 445	8	Cst
Viscosity Index	ASTM D 2270	178	
TBN NUMBER	ASTM D 974		MG KOH\g



Lubri BRAKE FLUID DOT 3

Brake Fluid DOT 3 is a high performance hydraulic brake fluid for use in automotive disc, drum and anti-skid brake systems and clutch systems

TEST	Method	Result	Unit
Distillation:			
IBP	ASTM D 1078	226.2	°C
DP	ASTM D 1078	248.8	°C
Density @20°C	ASTM D 4052	1.1166	kg/L
pH @20°C (Neat)	pH Meter	9.04	-
pH @20°C (1:1)	pH Meter	8.58	-







www.lubrioil.com