The kitchen equipment brief.

Commercial equipment for one South African retail store.
China quotation issue / Version 3.1

19
SCHEDULE REFERENCES

3
AUTOMATIC WOKS TO QUOTE

50
HZ ELECTRICAL SUPPLY

Document	RFQ-PP-STORE-003 / 10 November 2026 Supersedes v3.0: daily dry production/storage and minimum 12 sauces confirmed
Purpose	Obtain comparable manufacturer proposals. This is not a purchase order or fabrication release.
Operating basis	Confirmed: pasta made and dried daily in store, then stored dry on site; minimum 12 sauce varieties. Frozen-sauce receiving remains assumed. Drying/storage process and sauce workflow require validation.
Scope	Zones A–E. A3 is alternative to A1; C4 is optional. 17 base references, one alternative and one option.
Planning inputs	Approximately 42 m²; assumed 400/230 V, three-phase, 50 Hz; reported 60 A supply. Dimensions and supply must be surveyed.
Target output	120 finished portions/hour, provisional 140 g dry-pasta equivalent per portion. Target to demonstrate, not a proven equipment rating.

Quotation ready. Final selection remains conditional.
Suppliers must declare deviations and prove capacity, electrical compatibility, automatic functions and cleaning. Do not manufacture until the approved model schedule and drawings are released.

Every equipment page includes a reference image or labelled schematic and space for the actual offered-model photograph. English text governs; Chinese titles are navigation aids.

请按编号逐项报价，并注明型号、参数、交货条件及偏差。未经书面批准，请勿生产或替换型号。

Quote the complete machine. Declare every exception.

Use the accompanying CSV response sheet. Keep our reference numbers and add one row per alternative, accessory or excluded service. A blank technical answer means “not confirmed”.

Commercial return

1. **Identity:** manufacturer and exporter legal names, Chinese registration/business licence identifier, factory address, manufacturer/trader status and proposed contracting company. Provide beneficiary identity for normal due diligence.
2. **Comparable price:** USD FCA named factory or consolidation location, Incoterms 2020. State exact location, quantity, unit price and line total. FOB named port may be added as an alternative; separate freight and insurance if CIF Durban is offered.
3. **Order structure:** quote one store and repeat-store discounts. Show base subtotal separately from A3, C4, options, spares, packing, inspection, freight and installation. Do not add both extruders.
4. **Terms:** minimum 30-day validity requested; state MOQ, production lead time after drawings/deposit, payment milestones and warranty. No fixed deposit is offered in this RFQ.
5. **Technical file per powered model:** actual model photograph and rating plate, datasheet, full dimensions/ service envelope, kW/current/phase/frequency, wiring diagram, safety report and certificate details.
6. **Deviations:** identify every unmet requirement. No model, motor, material, refrigerant, control or electrical substitution after approval without written consent.

Shipping and support

- Itemised export packing: net/gross weight, case dimensions, CBM, lifting points, restraints and moisture/ corrosion protection. Label cases with document and item references; provide packing photographs.
- Solid-wood packing/dunnage to applicable ISPM 15 requirements. Declare refrigerant type/charge for forwarder assessment. Supply commercial invoice, packing list, origin details and proposed HS code per item.
- English HMI and operating/service manuals; critical spares with part numbers, prices and lead times; request five-year spares availability. State remote-support hours and commissioning scope.
- Define warranty start, parts/labour coverage, exclusions and who pays international freight. Identify any actual South African service partner; do not imply one exists without evidence.

> **Pre-shipment release:** agreed drawings, model-specific regulatory assessment, factory acceptance tests and independent inspection must be complete before buyer authorises shipment. Final payment terms will be agreed with the successful supplier.

State the load. Prove the fit.

Current store size, board rating and counter heights are planning inputs from the earlier pack. They are not a surveyed installation drawing.

Electrical capacity: unresolved

A 60 A, 400 V three-phase service provides approximately **41.6 kVA**. The previous pack's 46.9 kW estimate with three 8 kW woks would already require about **67.7 A at unity power factor** if balanced and simultaneous. A blanket 0.6 diversity factor does not establish that it fits.

Illustrative planning scenario — not design	Load
A1 4; A2 0.1; B1 15; B3 7.2 (3 warmer banks); C1–C4 2.1; D4 6; E1 1.5; E3 0.05 kW	35.95 kW
Three optional A4 fan units at 0.75 kW each	+2.25 kW
Three B2 woks at 8 kW each	+24 kW
Illustrative total, with fans and optional C4	**62.2 kW**
Balanced current at 400 V, unity power factor	**89.8 A**

Without the optional fans and C4 allowance, this example is 59.05 kW. Values remain estimates: actual cooker, refrigeration and wok models are unknown. Reheater B3-R, controlled dryer A4-D, hot-water heater, extraction, lighting, HVAC and other tenant loads are not included. No configuration is approved for 60 A.

Supplier data and local design release

- State rated and maximum kW/kVA, current by phase, power factor, inrush, neutral/earth requirements, connection method, protection requirements and recovery constraints. Confirm exact operating-voltage range for 230/400 V 50 Hz supply; do not assume a 380 V-only machine is suitable.
- Buyer's registered electrical professional must assess whole-site maximum demand, phase balance, any active load control, cable/protection sizing and any supply upgrade. Duty factor must be justified from the actual service cycle.
- Provide footprint plus open-door, tip, wash and service envelopes. Final hot-line length, canopy capture, make-up air, fire provisions, drainage and safe public separation require local fit-out approval. A 1.5 m hood is not pre-approved.

South African approvals

Supply model-specific safety reports, rating plate, wiring diagrams and conformity declarations. The importer will establish applicable compulsory specifications with NRCS and obtain required approval(s), or written non-scope confirmation, before shipment. The accredited laboratory must identify applicable standards and editions for each machine. CE marking and ISO 9001 do not replace applicable South African approval.

Food-contact evidence must identify alloys, plastics, seals/coatings and cleaning compatibility. The local food-safety and environmental-health team must approve the installed workflow and premises. References are listed at the end of this pack.

A1 | **BASE** | **QTY 1**

Automatic bronze-die pasta extruder

自动铜合金模具意面挤出机

Mix, extrude and cut pasta in the customer-visible production area. Quote one commercial machine with automatic short-pasta cutter, suitable for the proposed recipe and subsequent drying process.



SUPPLIER TO INSERT
Actual offered model photograph

Brand / model / country of manufacture

Reference photograph; equipment class only, not a model approval. RFQ requirements and buyer-accepted deviations govern; identify the exact offered model.

Required specification and supplier declarations

- Quote target fresh extrusion output of 10–15 kg/hour by shape and recipe; declare feed moisture and measured fresh-to-dried yield. Final dried moisture is not extrusion-feed moisture.
- Interchangeable food-contact bronze-alloy dies. State alloy and provide food-contact documentation; “copper colour” is insufficient. No PTFE-lined die as the base offer.
- Price dies individually: spaghetti, penne, rigatoni, fusilli, tagliatelle/pappardelle and bucatini. Explain which need a separate cutting/forming attachment; do not promise every shape on one head without proof.
- Automatic cutter with adjustable cut length and guarded operation; state batch size, mixer/extruder duty cycle, kg/hour for each selected shape, motor rating and supplied stand.
- Prefer vacuum-assisted extrusion; separately identify the pump, vacuum measurement and price. Declare any non-vacuum alternative explicitly. State die/head cooling and measured dough exit temperature.
- Food-contact surfaces documented and cleanable; accessible auger and die holder; safe interlocks. Show strip-down, cleaning and reassembly. Do not reject a suitable machine by motor size alone.
- Quote 230 V single-phase or 400 V three-phase, 50 Hz version; provide exact plate data, dimensions and service clearances. Spares: cutter blades, seals, die set, belt/drive and auger price.

ACCEPTANCE / SELECTION EVIDENCE

Demonstrate at least two agreed shapes with Papa Pasta recipe or a disclosed equivalent. Weigh output over a timed run; cook dried trial samples and assess breakage and texture. Daily production capacity remains subject to demand and drying validation.

Power: Supplier to declare. Only A1 OR A3 is purchased. Daily demand and production hours still need confirmation.

Model: _____ Unit price USD: _____ Lead time: _____


Complies / deviations attached: _____ Datasheet / photo / test report attached: _____

A2 BASE QTY 1

Pasta Theatre safety enclosure

意面展示区安全玻璃围护

A cleanable, ventilated glass surround around the selected extruder, separating customers from the working machine without blocking service or ventilation.



SUPPLIER TO INSERT
Actual offered model photograph

Brand / model / country of manufacture

Reference schematic only; not a fabrication drawing. RFQ requirements and buyer-accepted deviations govern; identify the exact offered model.

Required specification and supplier declarations

- Dimension to the selected A1/A3 machine, access route and service envelope; do not fabricate from an assumed footprint.
- Toughened safety glass and hygienic corrosion-resistant frame; propose glass thickness, edge protection, fixings and local safety-glazing compliance evidence.
- Removable or opening service panels; no interference with machine guards, emergency stop, heat rejection or cleaning access.
- Provide mechanical drawing, glass specification, ventilation openings and lighting/driver details. Coordinate counter height with the approved store drawing.
- Price supply-only, export protection and installation separately. A local fabrication comparison will also be obtained.

ACCEPTANCE / SELECTION EVIDENCE

Approve a dimensioned assembly drawing with extruder supplier and local fit-out designer before fabrication.

Power: Lighting to declare. Custom item: dimensions and public separation require design approval.

Model: _____ Unit price USD: _____ Lead time: _____

Complies / deviations attached: _____ Datasheet / photo / test report attached: _____

A3 | ALTERNATIVE | QTY 1

Italian-brand automatic pasta extruder — alternative

意大利品牌自动意面机（备选）

An Italian-brand comparison against A1, with automatic cutter and bronze-alloy extrusion dies. This is an alternative machine, not a second extruder.



SUPPLIER TO INSERT
Actual offered model photograph

Brand / model / country of manufacture

Italgi P17 manufacturer image; benchmark only, not model approval. RFQ requirements and buyer-accepted deviations govern; identify the exact offered model.

Required specification and supplier declarations

- State legal manufacturer, manufacturing country, model, authorised supply chain and warranty territory. Provide current manufacturer datasheet.
- Match A1 output, shape, cleaning, electrical and food-contact requirements, or list exceptions line by line.
- Use the A1 die schedule; identify bronze alloy, attachment compatibility and individual die prices. Bronze and pure copper are not interchangeable descriptions.
- Show cutter operation and actual kg/hour per shape. Confirm whether vacuum and cooling are included or optional.
- Reference shown: Italgi P17, with electronic short-pasta cutter. The manufacturer lists 17 kg/hour actual fresh production and 1.1 kW; this is not dried output. Confirm the quoted voltage/frequency and bronze die package.
- Offer a suitable South African 50 Hz configuration with complete electrical evidence and spares support. No transformer or site modification assumed.

ACCEPTANCE / SELECTION EVIDENCE

Same product trial as A1. Compare the complete landed and supported machine package, not brochure price alone.

Power: Supplier to declare. Exclude A3 from the base total. Reference image: Italgi P17, sourced from the Italian manufacturer; benchmark only.

Model: _____ Unit price USD: _____ Lead time: _____

Complies / deviations attached: _____ Datasheet / photo / test report attached: _____

A4 | **BASE** | **QTY 3**

Basic pasta tray racks — 600 mm wide

600毫米宽意面托盘晾架

Basic mobile stainless racks with food-grade trays for daily in-store pasta production and drying before on-site dry storage. This line is for racks, not a drying cabinet or freeze dryer.



SUPPLIER TO INSERT
Actual offered model photograph

Brand / model / country of manufacture

Reference photograph; equipment class only, not a model approval. RFQ requirements and buyer-accepted deviations govern; identify the exact offered model.

Required specification and supplier declarations

- Overall rack width target 600 mm. State depth, height, insertion direction, usable tray dimensions and clearance; prove the tray fits within the stated overall rack width.
- Quote 24–30 trays per rack, target tray class 600 × 400 mm where the insertion arrangement permits. State actual spacing, material, mesh/perforation and safe kg per tray.
- 304 stainless frame, smooth hygienic welds, four load-rated castors with at least two brakes; state fully loaded rating and anti-tip measures.
- Food-contact trays compatible with pasta and the validated cleaning method; price ten spare trays separately.
- State usable kg per rack at the demonstrated layer thickness, complete drying-cycle time and kg/day. Check whether three racks cover daily production and overlapping batches; do not equate shelf load with drying capacity.
- Optional fan/warm-air accessory only as a separate price with guards, power and airflow. No claim of shelf stability from an unvalidated ambient rack.
- A controlled drying solution may be offered separately as A4-D if trials show it is needed; it must not replace this rack quotation.

ACCEPTANCE / SELECTION EVIDENCE

Buyer must validate drying by recipe and shape: loading, time, temperature, relative humidity, final moisture/water activity, cooking quality and intended storage life. No ambient shelf-life promise is accepted without this evidence.

Power: Passive base; fans optional. Daily in-store drying and dry storage confirmed. Rack quantity and process need validation against daily kg and storage duration.

Model: _____ Unit price USD: _____ Lead time: _____

Complies / deviations attached: _____ Datasheet / photo / test report attached: _____

B1 | BASE | QTY 1

Nine-basket pasta cooker — nine independent lifts

九篮独立定时自动升降煮面炉

All-electric dried-pasta cooker. Each of nine baskets must have its own timer and lift clear of the water when that basket finishes, remaining raised until collected.



SUPPLIER TO INSERT
Actual offered model photograph

Brand / model / country of manufacture

Reference photograph; equipment class only, not a model approval. RFQ requirements and buyer-accepted deviations govern; identify the exact offered model.

Required specification and supplier declarations

- Nine physically independent basket lifts and timers, plus manual raise/lower override. Nine stored programs do not mean nine independent lifting mechanisms.
- State tank volume, usable basket size, safe dry-pasta weight per basket, number of portions per basket, water fill/overflow and drain connections.
- Cook the selected dried pasta for its actual validated time; use 8–12 minutes only as the planning range, not a restriction on manufacturer control design.
- Target whole-line service output: 120 portions/hour, each equivalent to 140 g dry pasta before boiling. Demonstrate sustained output including filling, draining and recovery.
- At one portion/basket, nine baskets yield only 45–67.5 portions/hour before handling. Declare how multiple portions per basket or an explicitly priced capacity alternative meets the target.
- Low-water/dry-boil protection, over-temperature cut-out, guarded lift pinch points, cleanable corrosion-resistant tank, starch overflow and accessible drain.
- Declare actual kW and phase currents. Existing 6–9 kW assumption is withdrawn; comparable commercial Chinese models list 12–15 kW. Do not cap power to hide a capacity shortfall.
- Provide live video of all nine lifts finishing at different times. If only six are available, quote as a non-conforming alternative with an output test; no silent substitution.

ACCEPTANCE / SELECTION EVIDENCE

Pass: at least 120 accepted portions in 60 minutes after warm-up, excluding rejects and including loading/draining. Record weights, cook time, basket loads and water recovery; prove independent staggered lifts.

Power: Supplier to declare; plan 12–15 kW. Nine independent lifts remain mandatory in the base quote; output is not yet proven.

Model: _____ Unit price USD: _____ Lead time: _____

Complies / deviations attached: _____ Datasheet / photo / test report attached: _____

B2 | BASE | QTY 3

Automatic induction wok — forward tip, auto wash and waste sump

自动电磁炒锅（前倾倒料、自动清洗、废水槽）

A commercial induction cooking station that automatically stirs/tosses cooked pasta with sauce, tips forward to discharge, washes by an integrated wash arm/ring and drains to a dedicated waste-water dump section.



SUPPLIER TO INSERT
Actual offered model photograph

Brand / model / country of manufacture

Reference photograph; equipment class only, not a model approval. RFQ requirements and buyer-accepted deviations govern; identify the exact offered model.

Required specification and supplier declarations

- Induction heating and motorised cooking action are essential. Quote three stations; 8 kW each is a comparison basis, not an approved limit. State real rated/maximum input and supply version.
- Motorised forward discharge into the serving/collection area. State usable tilt angle and bowl geometry; supply video with a pasta batch. Open customer-visible bowl preferred; declare drum-type alternatives.
- Integrated automatic wash arm or spray ring with repeatable wash/rinse sequence; state detergent dosing, potable-water pressure, backflow protection and litres/cycle. A hand-held spray gun alone is not compliant.
- Dedicated accessible waste-water dump/sump with removable solids strainer and drain connection. State capacity, hot-discharge temperature, cleaning access and permitted drain route.
- Programmable heat, agitation and time; English controls, manual recovery mode, guards/interlocks, emergency stop and tilt/wash safety controls. State automatic functions individually.
- Manufacturer-matched induction bowl with documented food-contact construction/coating, usable batch range and replacement cost. Suitable clad stainless is acceptable; do not substitute an unmatched 304-only vessel.
- Target at least 40 accepted portions/hour per station to support 120/hour across three; preferred 45/hour provides margin. Portion means cooked pasta equivalent to 140 g dry input plus a provisional 180 g sauce, not raw dry pasta placed in the wok.
- Declare heat recovery and cycle timing with actual sauce/protein temperatures. Include loading, finishing, discharge and required between-batch cleaning in demonstrated output.
- State full width, bowl at maximum tilt, service envelope, drainage and exhaust needs. No assumption that three stations fit a 1.5 m canopy.
- Price two 10 kW units as B2-ALT only if a witnessed trial demonstrates the same total output. Request 24-month commercial warranty; supplier must disclose actual term and exclusions.

ACCEPTANCE / SELECTION EVIDENCE

Show the exact quoted model heating, stirring, tipping, automatically washing and draining in one continuous video. Pass: at least 40 accepted portions per station in 60 minutes, preferably 45, including handling and required cleaning; exclude rejects. Assess breakage, sauce coating and allergen cleaning.

Power: 3 × declared kW; nominal basis 8 kW each. Forward tip + integrated auto wash + waste dump are essential. A generic automatic wok listing is not proof.

Model: _____ Unit price USD: _____ Lead time: _____

Complies / deviations attached: _____ Datasheet / photo / test report attached: _____

B3 | **BASE** | **QTY 1 set**

Sauce service station — minimum 12 sauces

酱汁保温台（至少十二种酱汁）

Provide at least 12 distinct, covered, independently controlled sauce positions available during service. Quote three four-well heated banks as one complete set; pumps are optional after actual-sauce trials.



SUPPLIER TO INSERT
Actual offered model photograph

Brand / model / country of manufacture

Reference: one modular warmer bank only; quote three banks / 12 sauce positions. RFQ requirements and buyer-accepted deviations govern; identify the exact offered model.

Required specification and supplier declarations

- Minimum 12 removable food-contact stainless wells, each with its own lid and temperature control. Comparison: 3 banks × 4 wells × 4 L nominal = 48 L nominal, not a requirement to fill every well. Declare usable capacity and footprint; price smaller-pan inserts separately.
- Hot-hold already reheated sauce: target operating food-core temperature at least 65 °C, verified throughout the well, with the validated SOP keeping hot perishable food above 60 °C.
- A warmer is not assumed to safely reheat chilled or frozen sauce. State reheat capability only with a demonstrated time/temperature process.
- Minimum 12 sauce varieties confirmed. Frozen receiving remains a working assumption: refrigerate during thawing, reheat by validated method, then hold hot. State any sauce needing chilled service separately. No counter thawing or topping up old batches.
- Quote B3-R commercial reheating equipment separately if this function is not provided by an approved existing process; state capacity, kW and time from chilled to the agreed food-core target.
- Pumps, if offered, must handle viscosity, solids and portion mass; disclose particle clearance and removable cleanable parts. Do not price a chocolate/squeeze-bottle warmer as equivalent.
- Identify each sauce position S01–S12; declare minimum/maximum working fill, small-batch replenishment, dedicated utensil/pump and allergen-cleaning procedure. Provide displays, thermal protection, drip tray, cleanability and spare prices.

ACCEPTANCE / SELECTION EVIDENCE

Demonstrate all 12 positions operating simultaneously at declared working fills, with core-temperature checks, access and cleaning. Test pumps with actual sauces if offered. Buyer to approve per-sauce reheat, replenishment and holding/discard SOPs.

Power: Declare; planning only: 3 × 2.4 kW = 7.2 kW. Minimum 12 sauces. Confirm hot/chilled split and per-sauce batches before order. B3-R remains separate.

Model: _____ Unit price USD: _____ Lead time: _____


Complies / deviations attached: _____ Datasheet / photo / test report attached: _____

C1 | BASE | QTY 1

Refrigerated prep counter with cold GN rail

带冷藏料槽的商用冷藏操作台

Commercial refrigerated base and covered cold ingredient rail for chilled toppings and prepared ingredients. Keep separate from direct heat unless the manufacturer approves the installation.

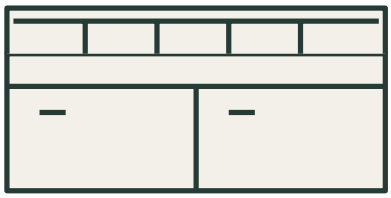

SUPPLIER TO INSERT
Actual offered model photograph

Brand / model / country of manufacture

Reference schematic only; not a fabrication drawing. RFQ requirements and buyer-accepted deviations govern; identify the exact offered model.

Required specification and supplier declarations

- Maintain food below 5 °C under the declared service conditions; target adjustable cabinet setpoint 0–4 °C. State independently tested cabinet and rail performance.
- Declare maximum ambient temperature and humidity rating; target hot-kitchen capability at 40 °C, or clearly state a lower tested rating for buyer assessment.
- State usable volume and GN pan layout/depth, lids, fill lines and included pans. Include chilled reserve for all 12 sauces where required; prevent overlap with the dedicated B3 hot holders. No ice-only cold top.
- Food-contact 304 stainless surfaces, cleanable corners, removable gaskets, self-closing doors, temperature display and accessible condenser.
- State refrigerant and charge, defrost/condensate management, total input, current and heat rejection. Natural refrigerant preferred subject to approved model safety.
- Provide counter footprint and ventilation/service clearances. Do not install a hot wok/cooker directly above this unit without written thermal/load approval.

ACCEPTANCE / SELECTION EVIDENCE

Demonstrate product temperatures in cabinet and pans at the declared ambient with repeated opening; record recovery and power.

Power: Supplier to declare.

Model: _____ Unit price USD: _____ Lead time: _____

Complies / deviations attached: _____ Datasheet / photo / test report attached: _____

C2 | **BASE** | **QTY 1**

Compact undercounter refrigerator

紧凑型台下冷藏柜

Back-of-house fridge for ingredients and controlled thawing/reserve stock across at least 12 sauce varieties. Confirm the combined C1/C2 capacity by actual pack count and thawing schedule.



SUPPLIER TO INSERT
Actual offered model photograph

Brand / model / country of manufacture

Reference photograph; equipment class only, not a model approval. RFQ requirements and buyer-accepted deviations govern; identify the exact offered model.

Required specification and supplier declarations

- Target width about 600 mm, final dimensions to approved layout; state net usable litres and actual shelf/GN clearance dimensions.
- Maintain food below 5 °C; cabinet setpoint target 0–4 °C, tested at declared hot-kitchen ambient. State ambient/humidity limits.
- Commercial continuous duty, forced-air cooling, self-closing solid door, replaceable gasket, temperature display and alarm or external logger provision.
- Cleanable food-contact surfaces and drip containment for thawing. Raw/ready-to-eat segregation must be possible.
- Declare refrigerant/charge, defrost, power/current and ventilation clearances. Price shelves, gaskets and controller spares.

ACCEPTANCE / SELECTION EVIDENCE

Provide S01–S12 sauce pack sizes, reserve/thawing quantities and required shelf space; size C1/C2 against deliveries and peak-day stock. Demonstrate loaded recovery.

Power: Supplier to declare. Provisional quantity: avoid duplicate refrigerated capacity after stock planning.

Model: _____ Unit price USD: _____ Lead time: _____

Complies / deviations attached: _____ Datasheet / photo / test report attached: _____

C3 | **BASE** | **QTY 1**

Commercial undercounter freezer

商用台下冷冻柜

Frozen-sauce reserve for at least 12 sauce varieties. The previous 100–150 L figure is only a starting size; provide the calculated capacity and upgrade quotation for the full sauce range.



SUPPLIER TO INSERT
Actual offered model photograph

Brand / model / country of manufacture

Reference photograph; equipment class only, not a model approval. RFQ requirements and buyer-accepted deviations govern; identify the exact offered model.

Required specification and supplier declarations

- Quote 100–150 L usable volume and an upgrade price. State internal dimensions, container fit and usable sauce-pack count.
- Maintain product at −18 °C or colder at the declared ambient; disclose tested ambient/humidity rating and warm-load recovery limits.
- Commercial duty, digital display, high-temperature alarm or logger provision, serviceable refrigeration components and replaceable gaskets.
- State defrost method and schedule, drain/condensate handling, refrigerant/charge and rating-plate input/current.
- Declare ventilation and door swing. Submit S01–S12 pack counts/volumes, delivery interval, daily usage and reserve days; allow airflow and accessible segregation. Do not assume equal demand for all sauces.

ACCEPTANCE / SELECTION EVIDENCE

Demonstrate representative pack loading and temperature recovery. Buffer days must be approved before the final capacity is ordered.

Power: Supplier to declare.

Model: _____ Unit price USD: _____ Lead time: _____

Complies / deviations attached: _____ Datasheet / photo / test report attached: _____

C4 | OPTION | QTY 1

Compact chilled retail display

小型商用冷藏展示柜

An optional customer-facing chiller for products that genuinely need refrigeration, such as chilled packaged sauce or drinks. Shelf-stable dry pasta is displayed ambient, not refrigerated.



SUPPLIER TO INSERT
Actual offered model photograph

Brand / model / country of manufacture

Reference photograph; equipment class only, not a model approval. RFQ requirements and buyer-accepted deviations govern; identify the exact offered model.

Required specification and supplier declarations

- Target frontage about 900 mm, final footprint and access direction to approved layout. State usable litres, shelves and pack capacity.
- Enclosed glass display with LED lighting and controllable access; state doors, service side, temperature uniformity and declared ambient class.
- For perishable food, maintain product below 5 °C; target control setpoint 0–4 °C. Drinks-only model must be labelled and priced separately.
- Declare refrigerant, total input/current, condensation management, ventilation and heat rejection.
- Identify food-contact surfaces and cleanable shelving, replaceable gaskets and spare controller availability.

ACCEPTANCE / SELECTION EVIDENCE

Confirm chilled merchandise before purchase; test representative packs and display temperatures at rated ambient.

Power: Supplier to declare. Do not include C4 in the core kitchen subtotal unless chilled retail is approved.

Model: _____ Unit price USD: _____ Lead time: _____

Complies / deviations attached: _____ Datasheet / photo / test report attached: _____

D1 | BASE | QTY 1

Stainless pasta preparation bench

不锈钢意面操作台

A hygienic bench beside the extruder for ingredient weighing and pasta handling.



SUPPLIER TO INSERT
Actual offered model photograph

Brand / model / country of manufacture

Reference photograph; equipment class only, not a model approval. RFQ requirements and buyer-accepted deviations govern; identify the exact offered model.

Required specification and supplier declarations

- Provisional 1500 × 700 × 900 mm working height; confirm against layout and extruder feed height before fabrication.
- 304 stainless top, legs and undershelf; state actual sheet thickness, load rating and reinforcement. Smooth sealed welds and cleanable edges.
- Adjustable corrosion-resistant feet and stable fully loaded assembly. Splashback configuration to suit installed position.
- State packed size, assembly method and fasteners. Cutting boards are locally purchased smallwares unless separately requested.

ACCEPTANCE / SELECTION EVIDENCE

Inspect dimensions, steel/material evidence, rigidity and weld quality. Compare local fabrication before import.

Power: None.

Model: _____ Unit price USD: _____ Lead time: _____


Complies / deviations attached: _____ Datasheet / photo / test report attached: _____

D2 | BASE | QTY 1

Two-bowl commercial wash-up sink with drainer

双槽不锈钢洗涤池（带沥水台）

Commercial two-bowl wash-up sink with drainer and pre-rinse assembly. This is separate from the dedicated handwash basin.

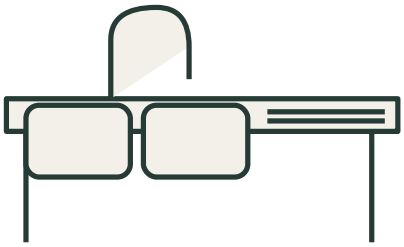

SUPPLIER TO INSERT
Actual offered model photograph

Brand / model / country of manufacture

Reference schematic only; not a fabrication drawing. RFQ requirements and buyer-accepted deviations govern; identify the exact offered model.

Required specification and supplier declarations

- Provisional footprint 1200–1500 × 600 mm; provide actual bowl and drainer dimensions. Ensure the largest pot and removable wok parts fit.
- 304 stainless construction with cleanable corners, minimum target bowl depth 250 mm, splashback and adjustable feet. Declare gauge and reinforcement.
- Include hot/cold mixer or safe blended supply, pre-rinse spray, basket wastes, traps and connection specifications; disclose local tap/valve compatibility.
- Provide clearances for grease interceptor access if installed below. Coordinate hot discharge and backflow protection with local plumber.
- Food-preparation sink and mop/cleaning sink requirements remain a fit-out design responsibility; wash-up sink is not automatically all three.

ACCEPTANCE / SELECTION EVIDENCE

Approve bowl/utensil fit and plumbing drawing with local fit-out team before manufacture.

Power: None.

Model: _____ Unit price USD: _____ Lead time: _____

Complies / deviations attached: _____ Datasheet / photo / test report attached: _____

D3 | BASE | QTY 1

Dedicated hands-free handwash basin

专用免手触洗手盆

Dedicated handwashing station with hygienic water control, soap and disposable towel provision, accessible to food handlers.



SUPPLIER TO INSERT
Actual offered model photograph

Brand / model / country of manufacture

Reference photograph; equipment class only, not a model approval. RFQ requirements and buyer-accepted deviations govern; identify the exact offered model.

Required specification and supplier declarations

- Knee, foot or suitable sensor operation is the Papa Pasta purchasing preference. Do not represent this preference as the literal wording of R638.
- Stainless basin with splashback, soap dispenser and hygienic towel dispenser; keep handwashing separate from utensils and food.
- Safe hot/cold or temperature-controlled blended water supply; declare tap, valve, strainer, flow and connection sizes.
- For sensor models, declare power supply, battery life and failure operation. Prevent cross-contamination and provide cleaning access.

ACCEPTANCE / SELECTION EVIDENCE

Confirm location and final provision against local environmental-health requirements and Certificate of Acceptability process.

Power: None for mechanical; declare for sensor.

Model: _____ Unit price USD: _____ Lead time: _____

Complies / deviations attached: _____ Datasheet / photo / test report attached: _____

D4 BASE QTY 1

Commercial dishwasher — 500 × 500 mm racks

商用洗碗机（500×500毫米筐）

Commercial undercounter machine for the actual utensil and tray load. Rinse and chemical performance must match the approved hygiene procedure.



SUPPLIER TO INSERT
Actual offered model photograph

Brand / model / country of manufacture

Reference photograph; equipment class only, not a model approval. RFQ requirements and buyer-accepted deviations govern; identify the exact offered model.

Required specification and supplier declarations

- Accept 500 × 500 mm racks; state usable wash height and supplied rack types/count. Confirm largest removable equipment parts fit.
- Target full wash/rinse cycle within 3 minutes under stated inlet conditions; report sustained racks/hour including recovery.
- Declare wash and final-rinse temperature at the point of delivery, chemical dosing and operating requirements. Validate effective cleaning/sanitising.
- Include detergent/rinse-aid pumps and drain pump where required. Provide water pressure, inlet temperature, litres/cycle and drainage requirements.
- State water hardness limit. Price a suitable external or integral softener from the actual water analysis; an integral softener is not mandatory if external treatment is suitable.
- Declare heater/boiler power, phase current, booster and hot-water dependency, ventilation needs and maintenance clearances.
- Commercial stainless construction, safety interlocks, replaceable arms/filters and local-service/spares plan.

ACCEPTANCE / SELECTION EVIDENCE

Demonstrate soil removal, sanitising parameters and sustained rack throughput with the proposed water conditions.

Power: Supplier to declare; plan 6 kW.

Model: _____ Unit price USD: _____ Lead time: _____

Complies / deviations attached: _____ Datasheet / photo / test report attached: _____

D5 | **BASE** | **QTY 1 lot**

Dry-store shelving, ingredient bins and finished-pasta storage

干货货架、原料箱及成品干意面储存容器

Dry storage for ingredients and pasta made and dried daily in store. Include separate sealed finished-pasta containers and shelving capacity, not only flour bins.



SUPPLIER TO INSERT
Actual offered model photograph

Brand / model / country of manufacture

Reference photograph; equipment class only, not a model approval. RFQ requirements and buyer-accepted deviations govern; identify the exact offered model.

Required specification and supplier declarations

- Quote two adjustable bays as a starting configuration; state dimensions, shelf count, load ratings and usable storage kg. Price any extra bays needed for the declared daily output and carry-over stock.
- Corrosion-resistant cleanable stainless or suitable coated construction; no timber/chipboard in the proposed food area.
- Quote four lidded ingredient bins plus a separately itemised set of sealed food-contact finished-pasta containers. State counts, usable litres/kg by shape, stackability and batch/date/FIFO label space.
- Segregate finished dry pasta from raw flour, wet drying batches, splash and cleaning chemicals; provide pest/moisture protection and cleaning access. Do not seal pasta while still warm/damp; release only after validated drying/cooling.
- Declare packed volume and flat-pack assembly method. Compare local supply because shipping volume may exceed equipment value.

ACCEPTANCE / SELECTION EVIDENCE

Show ingredient and finished-pasta storage layout, usable kg by shape, batch separation and FIFO access. Final container count depends on daily production, carry-over stock and validated storage life.

Power: None.

Model: _____ Unit price USD: _____ Lead time: _____

Complies / deviations attached: _____ Datasheet / photo / test report attached: _____

E1 | BASE | QTY 1

Three-tank non-carbonated slush machine

三缸非碳酸雪融机

Countertop frozen-drink machine with three independent flavour tanks, target 12 L per tank. No can sealer is included.



SUPPLIER TO INSERT
Actual offered model photograph

Brand / model / country of manufacture

Reference photograph; equipment class only, not a model approval. RFQ requirements and buyer-accepted deviations govern; identify the exact offered model.

Required specification and supplier declarations

- Three tanks, nominal 12 L each. State actual recommended working fill, minimum fill and independent freezing/control arrangement.
- Non-carbonated slush; declare permitted sugar/Brix and recipe limits. Do not promise performance for sugar-free mix without a successful trial.
- State cups/hour and freeze-down time at a defined cup size, mix starting temperature and hot ambient; nominal tank capacity is not recovery output.
- Commercial named compressor or fully identified equivalent, night/standby mode, accessible condenser and thermal protection.
- Food-contact bowls, augers, taps and seals suitable for the product; food-grade polymer augers are acceptable when documented and durable.
- R290 preferred where supported by model safety evidence and competent local servicing; state refrigerant, charge, handling label and installation clearance. No automatic R404A fallback.
- Target countertop footprint about 600 × 600 mm; declare full operating size, lid removal clearance, weight when full and heat rejection.
- 230 V 50 Hz configuration, actual kW/current and connector; price tap seals, auger/gearbox, bowl and compressor warranty separately.

ACCEPTANCE / SELECTION EVIDENCE

Trial the intended recipe at rated ambient through a repeated-draw service cycle; inspect consistency, dispense rate, cleaning time and spare seals.

Power: Declare; plan 1.5 kW.

Model: _____ Unit price USD: _____ Lead time: _____


Complies / deviations attached: _____ Datasheet / photo / test report attached: _____

E2 | BASE | QTY 1

Grease interceptor — local sizing approval

隔油器（需当地确认选型）

Serviceable grease interceptor coordinated with kitchen drainage and mall/local authority requirements. Do not order a generic under-sink box by volume alone.

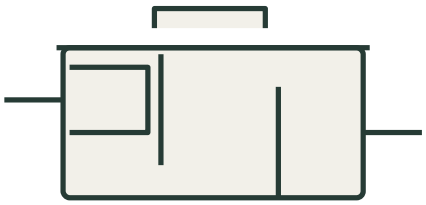

SUPPLIER TO INSERT
Actual offered model photograph

Brand / model / country of manufacture

Reference schematic only; not a fabrication drawing. RFQ requirements and buyer-accepted deviations govern; identify the exact offered model.

Required specification and supplier declarations

- Supplier to propose rated flow, retention/grease capacity and inlet/outlet sizes based on fixture loading supplied by the local drainage designer.
- Declare applicable test standard and independent capacity evidence; provide installation drawing, venting and access/clean-out clearances.
- Removable solids basket where appropriate, odour-tight service lid, corrosion/temperature-resistant body and replaceable seals.
- Local plumber must approve connections for sinks, wok wash discharge and any dishwasher hot water; not all flows may be suitable for the same interceptor.
- State cleaning frequency assumptions and maintenance access. Price supply-only; local fabrication/supply comparison required.

ACCEPTANCE / SELECTION EVIDENCE

Written local drainage/mall acceptance of type, capacity, routing and installation location before order.

Power: None. Not a substitute for a grease-rated drainage design.

Model: _____ Unit price USD: _____ Lead time: _____


Complies / deviations attached: _____ Datasheet / photo / test report attached: _____

E3 | **BASE** | **QTY 1 set**

Receiving and portion-control scales

收货台秤及份量电子秤

One bulk receiving scale and one accurate food portion scale. These are process-control scales unless used for trade.

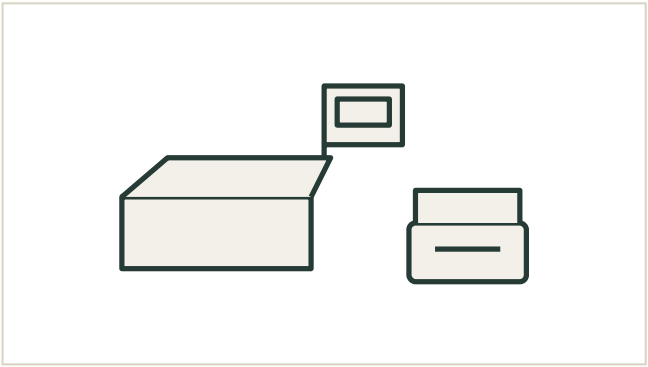

SUPPLIER TO INSERT
Actual offered model photograph

Brand / model / country of manufacture

Reference schematic only; not a fabrication drawing. RFQ requirements and buyer-accepted deviations govern; identify the exact offered model.

Required specification and supplier declarations

- Receiving platform: target 150 kg × 50 g; quote a 300 kg alternative only if needed for delivery loads. State platform dimensions.
- Portion scale: target 5–10 kg capacity with 1 g readability for ingredients and sauce portions; state verified accuracy/repeatability, not just display increment.
- Cleanable food-contact platform, stable zero/tare, splash protection and rechargeable battery or compatible 230 V 50 Hz adapter.
- Provide traceable calibration evidence, calibration procedure, test-weight requirement and overload protection.
- If used to determine sale price by weight, declare applicable South African legal-metrology approval/verification route separately.

ACCEPTANCE / SELECTION EVIDENCE

Verify with traceable test weights across the working range; check repeatability, tare and practical portion sizes.

Power: Declare; allowance 0.05 kW.

Model: _____ Unit price USD: _____ Lead time: _____

Complies / deviations attached: _____ Datasheet / photo / test report attached: _____

Demonstrate the service. Then release the order.

Tests to agree before deposit/fabrication

Reference	Evidence required for selection and pre-shipment acceptance
A1 / A3 + A4	Recipe and shape trial, timed fresh output, dried yield, cleaning, and cooking integrity. Demonstrate daily kg through drying and sealed on-site storage; approve process and storage life before treating output as shelf-stable stock.
B1	All nine independent lifts with staggered completion; 60-minute sustained dried-pasta trial at stated basket load and cooking time. Record output, rejects and recovery.
B2	Continuous video of the exact quoted model stirring, forward tipping, automatically washing and draining. Service trial includes cleaning/changeover, guards and emergency stop. Hand spray alone fails the automatic-wash requirement.
B3 / B3-R	At least 12 covered sauce positions simultaneously; measured core temperatures at declared fills, validated reheating/replenishment and hygienic cleaning. Test pumps with actual sauces if selected.
C1–C4 / E1	Loaded temperature or repeated-draw tests at declared ambient, controller/food temperatures, recovery, ventilation and cleaning access.
All items	Approved model/BOM, drawings, nameplates, operating manuals, applicable compliance evidence, packing inspection and reference-labelled photos. No unauthorised substitution.

Tests use agreed representative recipes, starting temperatures and portion weights. Buyer or independent inspector witnesses selected factory tests; site acceptance repeats critical functions after installation. Trial approval does not replace food-safety process validation or local regulatory approval.

By others — coordinate, do not omit

- Local electrical installation and capacity verification; extraction/ducting/make-up air; HVAC; fire protection; safe customer separation and fit-out.
- Potable hot/cold water, backflow prevention, water analysis/treatment, floor drainage, food-preparation and mop-sink provisions, and approved grease-waste routing.
- Opening utensils/smallwares, hygiene consumables, safety equipment and POS/front-of-house systems are outside this equipment quote.
- Central-kitchen production, blast/freezing, packaging and filling lines remain outside this retail-store pack.

Scope controls preserved: no can sealer, no separate dough mixer and no Zone F. E2 now means grease interceptor; E3 means scales. A3 replaces A1 if selected; C4 is optional. Optional A4-D and B3-R are priced separately and do not change the base rack or hot-holder brief.

Sources and issue control.

Checked 10 November 2026. These references support the procurement requirements; they do not certify any supplier or quoted machine. Links require internet access.

1. **NRCS model-specific LoA procedure**
   https://www.nrcs.org.za/Documents/Electrotech/LOA%20Admin%20Procedure/LOA%20ADMIN%20Revised%2012_06%20May%202019.pdf
   Commercial catering is included among the procedure examples; importer must confirm scope for each offered model.

2. **VC8055 government notice**
   https://www.gov.za/sites/default/files/gcis_document/201409/3184489.pdf
   Scope and exclusions must be read with the model and intended use.

3. **Department of Health / R638 (2018)**
   https://www.health.gov.za/wp-content/uploads/2024/10/Regulations-governing-general-hygiene-requirements-for-food-premises-the-transport-of-food-and-related-matters-R638-of-2018.pdf
   Hygiene, equipment, handwashing and temperature provisions. Buyer setpoints provide operating margin.

4. **ICC / Incoterms 2020 checklist**
   https://library.iccwbo.org/content/clp/Others/incoterms_2020_checklist_2024-update.pdf
   Use a named place/port; FCA is suitable for containerised consolidation. CIF is not store delivery.

5. **South African Department of Agriculture / wood packaging**
   https://www.nda.gov.za/index.php/publication/392-inspection-services-wood-packaging
   Wood-packaging import requirements, including applicable ISPM 15 treatment/marking.

6. **SARS / duties and taxes for importers**
   https://www.sars.gov.za/customs-and-excise/duties-and-taxes/duties-and-taxes-for-importers/
   Broker validates each HS classification, duty and import VAT. No flat all-equipment duty is assumed.

7. **IEC / commercial cooking appliance safety scope**
   https://webstore.iec.ch/en/publication/67835
   Relevant standard family example; the laboratory must determine standards for the exact robot and intended installation.

8. **Italgi / controlled pasta drying brochure**
   https://www.italgi.it/download/products/62/brochure.pdf
   Controlled temperature and humidity distinguish final drying from a simple tray rack.

9. **Italgi / P17 manufacturer page**
   https://www.italgi.it/en/pasta-mixers-and-extruders-P17-Pasta-machine-Pasta-extruder_c5_p3.html
   Source for the Italian benchmark image, cutter and fresh-output reference. Confirm bronze die package and electrical version.

> **Before issue:** add buyer contact, supplier addressee and quote deadline in the accompanying response sheet. Suppliers may return proposals now; no production, import-compliance or site-capacity approval is implied.

Prepared for Papa Pasta / Infinity Brands. Reference images are indicative legacy research assets; schematics correct images that previously represented different equipment. Supplier must provide photographs of the exact offered models. This issue withdraws earlier assertions of proven 120-portion output, blanket 60 A compatibility and verified supplier/model conformity.