





文件类型

客户图面

MARK	DATE	ECN NO.	DESCRIPTION	REV.	DESIGN

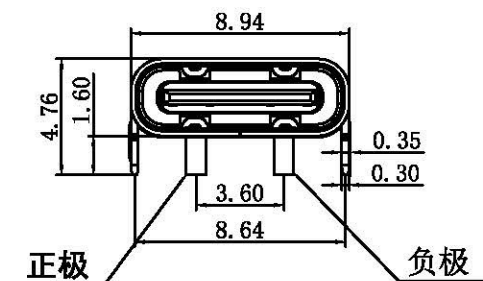

规格说明: Specifications:

电气特性: Electrical:

- 额定电流: Current Rating
1.5A/contact terminal
- 接触阻抗: Contact Resistance
30mΩ MAX
- 耐电压: Dielectric Withstanding Voltage:
100 V AC AT Sea Level
- 绝缘阻抗: Insulation Resistance:
100MΩ MIN 250V DC

物理性能: Mechanical:



- 插拔力: Mate force:
0.51Kg-2.04Kg
- 拔出力: Unmate force:
0.82Kg-2.04Kg

原材料: Material:

- 塑胶: Housing:
High Temperature Plastic,
LCP White/Black
- 端子: Contact: Copper alloy
- 外壳: Shell: SUS/Copper/SPCC

电镀: Material:

- 端子: Contact: Plated Gold in Mating Area;
Tin On Solder Tails
- 外壳: Shell:
Plated Nickel




RECOMMENDED PCB LAYOUT(TOP VIEW)
GENERAL TOLERANCES: ±0.05
仅供参考



長熒有限公司

TEL: 02-26945824 FAX: 02-26946971

UNLESS OTHERWISE SPECIFIED TOLERANCE			
ANG	TOL	DIM	TOL
X.	±4.0°	.X	±0.30
X.X	±3.0°	.XX	±0.20
X.XX	±2.0°	.XXX	±0.05

DRAW NO.			TITLE	TYPE-CF 2P两脚插板DIP脚长1.6			
DESIGN	XIAO XU	MAT'L	PART NO.	Please see P/N information			
VERIFIED	TANDY	SEE TABLE					
APPROVED	Z.W.H	DATE		UNITS	SCALE	PAGE	SIZE
		06/05'20		mm	1:1	1/1	A4