



เครื่องปรับอากาศ
แบบรวมศูนย์
VRFH-5C



ver 2026 R.00

VRFH-5C

Advanced Wide Voltage Operation

Total Pipe Length **1000m**
Height Drop **110m**

Max. total pipe length 1000m

Max. actual pipe length 220m

Max. equivalent pipe length 260m

Max. drop between IDU/ODU
90m (outdoor unit up) /
110m (outdoor unit down)

Max. drop between IDU/IDU
30m

If the total pipe length is between 500m and 1100m or the drop between IDU and ODU more than 50m, **please contact your local dealer.**

Standard lengths 90m. If >90m, enlarge the pipe diameter as pipe "C" diameter rules.

Standard lengths 40m. If >40m, the pipe between the first branch and the farthest indoor unit need to enlarge one size (refer to pipe A "6" B "5" diameter rules).

Standard lengths 15m. If >15m, the pipe between indoor units and the nearest branch pipe need to enlarge one size (refer to pipe A "6" diameter rules).

Standard height differences 50m, if 50m < x < 70m, need meet following conditions:

Indoor red capacity/outdoor corrected capacity 130%.


Set long pipe model from outdoor PCB.

Gas pipe and liquid pipe of main pipe need to enlarge one size, refer to pipe "C" diameter rules.

If single way total pipe length >500m, need to add compressor oil, 0.3L/100m pipe length less than 100m count as 100mL.

For example, if the total pipe length is 620m, then we should add 0.6L compressor oil.

For 70m, please contact the local qualified serviceman or supplier. If >70m, there is same warning in selection software popping up.

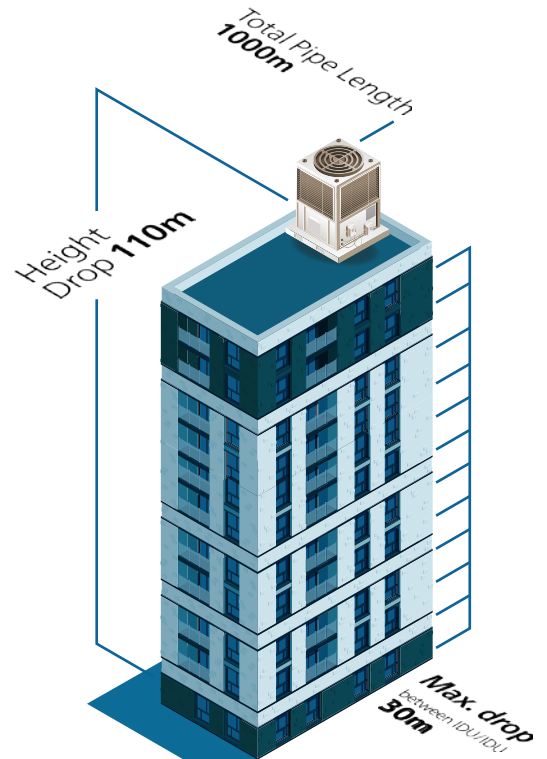

Wide Voltage Operation




The new VRFH-5C adopt wide voltage filter board, this can insure the unit stable working in voltage range between 310V-460V (Note: Outdoor Unit)


Three Stages Cooling

Adopt Three-Stage Subcooling Cycle Technology.

Three-stage subcooling cycle technology, increased unit efficiency by **9%**. Maximizing **30°C** subcooling, increase unit refrigerating capacity by **46%**.

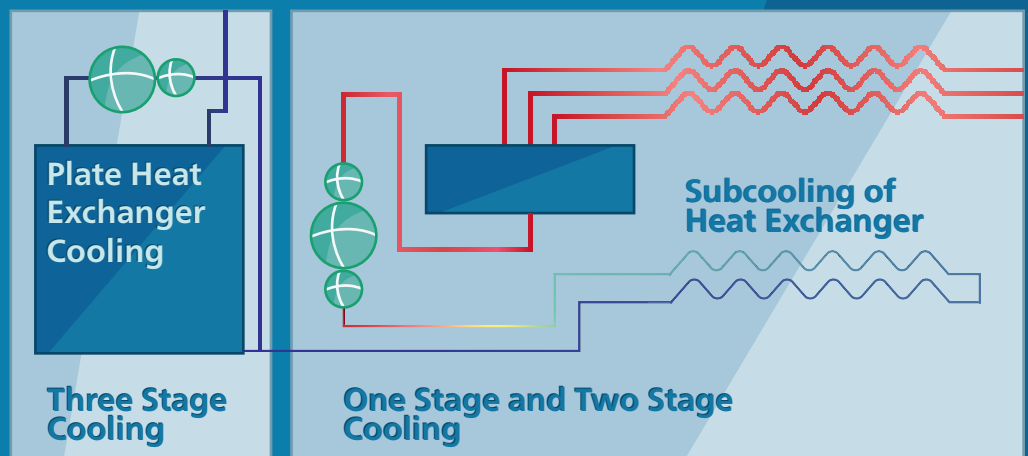

ADVANCED TECHNOLOGY

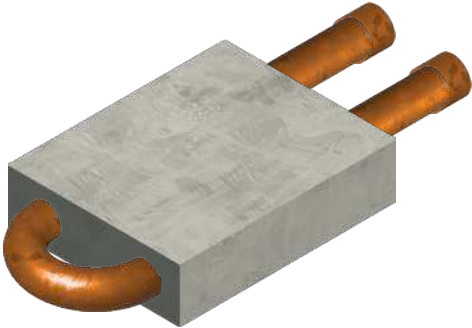

Directly refrigerant cooling PCB

Traditional refrigerant cooling: firstly copper tube cooling fin, then thin fin cooling compressor drive module. three layers of heat resistance heat exchange. Cause large cold loss.


Tasaki directly refrigerant cooling: single unit directly cools the interior, fin cooling compressor drive module, reduce a layer of heat resistance. under the same operating condition, the temperature of the compressor drive module is lowered by 8°C, to ensure that the whole unit can continue to work under the high temperature of 53°C.

Integral design, the heat fin and PCB board fit more closely, high cooling efficiency, there will be no condensation, more safety.

4 Ways Heat Exchanger

DC Inverter Compressor

- > Adopt double rotor compressor, high efficiency in low frequency, bring better seasonal energy efficiency.
- > The efficient separation design of the compressor improves the performance of separating oil and refrigerant.
- > The compressor adopts the movement of oil pipe design, increase the oil volume, at the same time also suck the oil at the bottom well and lock oil.
- > The compressor adopts steel crankshaft (originally cast iron crankshaft) to increase the hardness and reliability, reduce the noise.

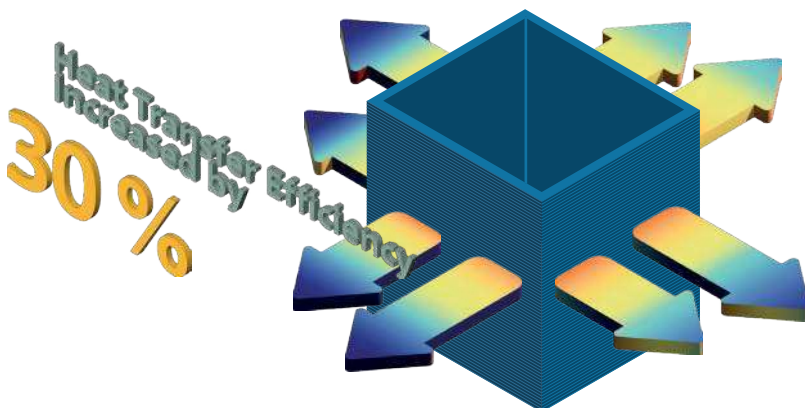


HIGH EFFICIENCY

DC Fan Motor

Outdoor unit matches efficient variable-speed DC-motor, driven by sine wave, wider efficiency range and torque range, motor efficiency is increased by 17.9%, fan of an outdoor unit can achieve 0-91 Hz stepless frequency.


IPLV up to 8.5 (8HP), EER up to 4.82 (8HP)

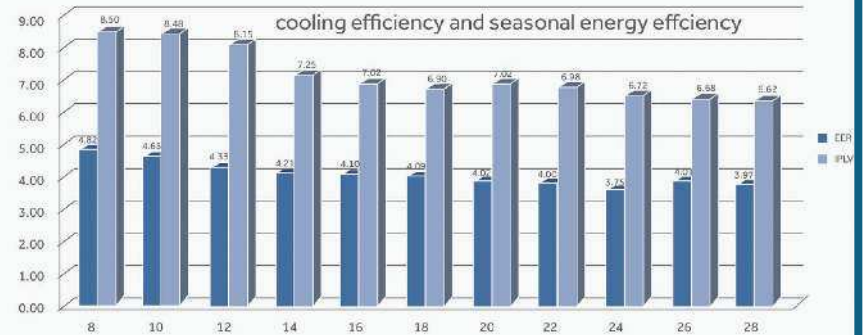

SUPER COMFORT

Quick Cooling


Start up and reaching maximum output in short time, realize quick cooling. (Graphic of quick cooling startup from "Starting to 100% Cooling and Heating" within 56sec).

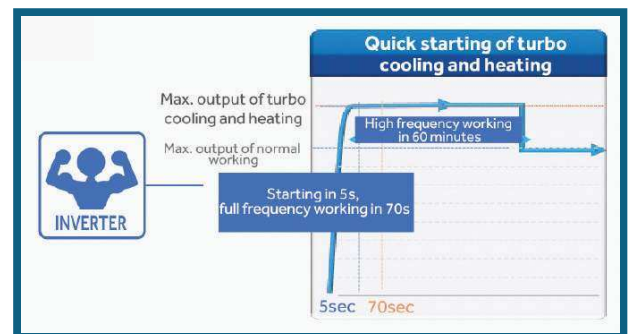

VRFH-5C

High Temperature Performance

Stable performance in high temperature condition, insure the user comfortable experience. The cooling capacity will be reduced only within 5% under the outdoor working condition of 43°C of the whole series products.

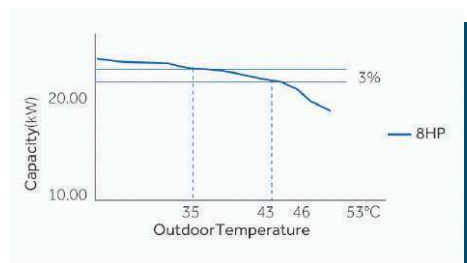


Easy Installation

Compact electric control box design, compared with Tasaki heat pump, the electric control box volume reduced by 60%, you can maintenance the compressor, stop valve, sensor and other parts only by opening the front panel.



Large Connection Ratio

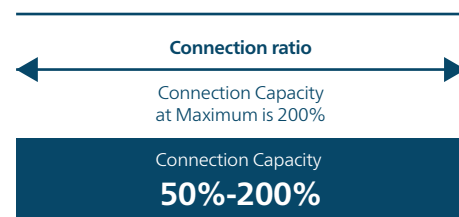

Conditions of VRF indoor unit connection capacity (TBD)

Applicable Tasaki Indoor Unit	All indoor units
Single outdoor units	200%
Double outdoor units	200%
Triple outdoor units	1.95%

- Note: The connection capacity of indoor units is between 130% and 150% over specifications recommended in the region records.

Smart Link

Continues smart link function, easy installation, save labor.



3-Way Pipe Connection

You can freely choose the left, front and bottom way connect the pipe, easy installation.



VRFH-5C

Model			VRFH08-CD5C	VRFH10-CD5C	VRFH12-CD5C	VRFH14-CD5C	VRFH16-CD5C	VRFH18-CD5C	
Combination Model			/	/	/	/	/	/	
			/	/	/	/	/	/	
			/	/	/	/	/	/	
			/	/	/	/	/	/	
Capacity	Capacity range	HP	8	10	12	14	16	18	
	Cooling	kW	22.4	28.0	33.5	40.0	45.0	50.0	
	Power supply	Ph/V/Hz	3/380~415/50/60	3/380~415/50/60	3/380~415/50/60	3/380~415/50/60	3/380~415/50/60	3/380~415/50/60	
Electrical Parameters	Cooling	Rated Power input	kW	4.65	6.02	7.74	9.50	10.98	12.22
		Max. Power input	kW	11.15	11.53	12.09	15.7	18.42	21.86
		Rated current	A	7.85	10.17	13.06	16.04	18.53	20.64
		Max. current	A	18.20	18.91	19.74	26.62	30.32	34.26
	COP			4.82	4.65	4.33	4.21	4.10	4.09
	ISEER			8.5	8.75	8.3	7.4	7.02	7.2
	IPLV			8.5	8.48	8.15	7.25	7.02	6.90
Performance	Air flow (H)	m³/h	11000	11000	12000	13500	13500	13500	
	Sound pressure level (H)	dB(A)	59.0	59.0	59.0	60.0	61.0	62.0	
	Sound power level (H)	dB(A)	73.0	73.0	73.0	74.0	75.0	76.0	
Installation	External dimensions(W/D/H)	mm	980/750/1690						
	Shipping dimensions(W/D/H)	mm	1070/850/1858						
	Net/ shipping weight	Kg	201/226	201/226	201/226	202/227	220/245	224/249	
	Compressor type		DC INV. Twin-Rotary						
	Compressor brand		MITSUBISHI ELECTRIC						
	Compressor quantity		1INV	1INV	1INV	1INV	1INV	1INV	
	Refrigerant type		R410A	R410A	R410A	R410A	R410A	R410A	
	Refrigerant charge	kg	9	9	9	9	10	10	
	Refrigerant liquid pipe	mm	9.52	9.52	12.70	12.70	12.70	15.88	
	Refrigerant gas pipe	mm	19.05	22.22	25.40	25.40	28.58	28.58	
	Max. total pipe lenght	m	1000	1000	1000	1000	1000	1000	
	Max. pipe length (Equivalent/ Actual)	m	260/220	260/220	260/220	260/220	260/220	260/220	
	Max. drop between I.U.&O.U (O.U up/down) *1	m	110/90	110/90	110/90	110/90	110/90	110/90	
	Standard drop between I.U.&O.U (O.U up/down) *2	m	50/40	50/40	50/40	50/40	50/40	50/40	
	Max. drop between I.U *3	m	30	30	30	30	30	30	
	Standard drop between I.U *4	m	18	18	18	18	18	18	
	External static pressure	Pa	110	110	110	110	110	110	
Connection Ratio	Connectable unit ratio	%	50-200 with limitation						
	Maximum number of indoor units		20	25	30	36	40	45	
Working Temp	Cooling	°C	-5~53						

Max. drop between I.U.&O.U *1
 Standard drop between I.U.&O.U *2
 Max. drop between I.U. *3
 Standard drop between I.U. *4

If the height difference between the outdoor and the indoor units is from 50 to 110m, you MUST contact your local distributor/dealer for individual design and production.
 Standard design and production in factory.
 If the height difference between the indoor units is from 18 to 30m, you MUST contact your local distributor/dealer for individual design and production.
 Standard design and production in factory.

*All the specification are tested under normal condition(In cooling, Indoor Temp. is 27 °C DB/19 °C WB; Outdoor Temp. 35 °C DB/24WB; In heating, Indoor Temp. is 20 °C DB, outdoor Temp. is 7 °C DB/6 °C WB)

Model			VRFH20-CD5C	VRFH22-CD5C	VRFH24-CD5C	VRFH26-CD5C	VRFH28-CD5C	VRFH30-CD5C	VRFH32-CD5C
Combination Model			/	/	/	/	/	VRFH14-CD5C	VRFH16-CD5C
			/	/	/	/	/	VRFH16-CD5C	VRFH16-CD5C
			/	/	/	/	/	/	/
			/	/	/	/	/	/	/
Capacity	Capacity range	HP	20	22	24	26	28	30	32
	Cooling	kW	56.0	61.5	67.0	73.0	78.0	85.0	90.0
	Power supply *	PhV/Hz	3/380 ~415/50/60	3/380 ~415/50/60	3/380 ~415/50/60	3/380 ~415/50/60	3/380 ~415/50/60	3/380 ~415/50/60	3/380 ~415/50/60
Electrical Parameters	Cooling	Rated Power input	kW	13.93	15.38	17.87	18.20	19.65	20.48
		Max. Power input	kW	33.01	33.31	33.64	33.92	34.24	34.12
		Rated current	A	23.52	25.96	30.16	30.73	33.17	34.57
		Max. current	A	53.55	54.21	54.70	55.23	55.7	56.94
	COP			4.02	4.00	3.75	4.01	3.97	4.15
	ISEER			7.02	6.98	6.72	6.68	6.62	7.18
	IPLV			7.02	6.98	6.72	6.68	6.62	7.13
Performance	Air flow (H)	m³/h	17000	18000	19000	19000	19000	13500+13500	13500+13500
	Sound pressure level (H)	dB(A)	63.0	63.0	64.0	64.0	64.0	64.0	64.0
	Sound power level (H)	dB(A)	77.0	77.0	78.0	78.0	78.0	78.0	78.0
Installation	External dimensions(W/D/H)	mm	1410/750/1690					980/750/1690+980/750/1690	
	Shipping dimensions(W/D/H)	mm	1515/850/1858					1070/850/1858+1070/850/1858	
	Net/ shipping weight	Kg	300/329	300/329	310/339	310/339	310/339	202/227+220/245	220/245+220/245
	Compressor type		DC INV. Twin-Rotary						
	Compressor brand		MITSUBISHI ELECTRIC						
	Compressor quantity		2INV	2INV	2INV	2INV	2INV	1INV+1INV	1INV+1INV
	Refrigerant type		R410A	R410A	R410A	R410A	R410A	R410A	R410A
	Refrigerant charge	kg	10	10	10	10	10	9+10	10+10
	Refrigerant liquid pipe	mm	15.88	15.88	15.88	15.88	19.05	19.05	19.05
	Refrigerant gas pipe	mm	28.58	28.58	28.58	28.58	31.75	31.75	31.75
	Max. total pipe length	m	1000	1000	1000	1000	1000	1000	1000
	Max. pipe length (Equivalent/ Actual)	m	260/220	260/220	260/220	260/220	260/220	260/220	260/220
	Max. drop between I.U.&O.U (O.U up/down) *1	m	110/90	110/90	110/90	110/90	110/90	110/90	110/90
	Standard drop between I.U.&O.U (O.U up/down) *2	m	50/40	50/40	50/40	50/40	50/40	50/40	50/40
	Max. drop between I.U *3	m	30	30	30	30	30	30	30
	Standard drop between I.U *4	m	18	18	18	18	18	18	18
	External static pressure	Pa	110	110	110	110	110	110	110
Connection Ratio	Connectable unit ratio	%	50-200 with limitation					50-150 with limitation	
	Maximum number of indoor units		50	55	60	64	64	64	64
Working Temp.	Cooling	°C	-5~53						

Max. drop between I.U.&O.U *1
Standard drop between I.U.&O.U *2
Max. drop between I.U. *3
Standard drop between I.U. *4

If the height difference between the outdoor and the indoor units is from 50 to 110m, you MUST contact your local distributor/dealer for individual design and production.
Standard design and production in factory.
If the height difference between the indoor units is from 18 to 30m, you MUST contact your local distributor/dealer for individual design and production.
Standard design and production in factory.

*All the specification are tested under normal condition(In cooling, Indoor Temp. is 27 °C DB/19 °C WB; Outdoor Temp. 35 °C DB/24WB; In heating, Indoor Temp. is 20 °C DB. In heating, outdoor Temp. is 7 °C DB/6 °C WB)

VRFH-5C

Model			VRFH34-CD5C	VRFH36-CD5C	VRFH38-CD5C	VRFH40-CD5C	VRFH42-CD5C	VRFH44-CD5C	
Combination Model			VRFH16-CD5C	VRFH18-CD5C	VRFH18-CD5C	VRFH20-CD5C	VRFH20-CD5C	VRFH22-CD5C	
			VRFH18-CD5C	VRFH18-CD5C	VRFH20-CD5C	VRFH20-CD5C	VRFH22-CD5C	VRFH22-CD5C	
			/	/	/	/	/	/	
			/	/	/	/	/	/	
Capacity	Capacity range	HP	34	36	38	40	42	44	
	Cooling	kW	95.0	100.0	106.0	112.0	117.5	123.0	
	Power supply	PhV/Hz	3/380~415/50/60	3/380~415/50/60	3/380~415/50/60	3/380~415/50/60	3/380~415/50/60	3/380~415/50/60	
Electrical Parameters	Cooling	Rated Power input	kW	23.2	24.45	26.2	27.9	29.3	30.8
		Max. Power input	kW	40.3	43.72	54.9	66.0	66.3	66.6
		Rated current	A	39.2	41.3	44.2	47.0	49.5	51.9
		Max. current	A	64.6	68.5	87.8	107.1	107.8	108.4
	COP			4.09	4.09	4.05	4.02	4.01	4.00
	ISEER			7.11	7.20	7.09	6.99	6.96	6.93
	IPLV			6.95	6.90	7.02	7.13	7.06	6.99
Performance	Air flow (H)	m³/h	13500+13500	13500+13500	13500+17000	17000+17000	17000+18000	18000+18000	
	Sound pressure level (H)	dB(A)	65	65.0	66	66.0	66.0	66.0	
	Sound power level (H)	dB(A)	79	79.0	80	80.0	80.0	80.0	
Installation	External dimensions(W/D/H)	mm	980/750/1690+980/750/1690			980/750/1690+1410/750/1690	1410/750/1690+1410/750/1690		
	Shipping dimensions(W/D/H)	mm	1070/850/1858+1515+850/1858	1515/850/1858+1515/850/1858					
	Net/ shipping weight	Kg	220/245+224/249	224/249+224/249	224/249+300/329	300/329+380/329			
	Compressor type		DC INV. Twin-Rotary						
	Compressor brand		MITSUBISHI ELECTRIC						
	Compressor quantity		1INV+1INV	1INV+1INV	1INV+2INV	2INV+2INV	2INV+2INV	2INV+2INV	
	Refrigerant type		R410A	R410A	R410A	R410A	R410A	R410A	
	Refrigerant charge	kg	10+10	10+10	10+10	10+10	10+10	10+10	
	Refrigerant liquid pipe	mm	19.05	19.05	19.05	19.05	19.05	19.05	
	Refrigerant gas pipe	mm	31.75	38.1	38.1	38.1	38.1	38.1	
	Max. total pipe lenght	m	1000	1000	1000	1000	1000	1000	
	Max. pipe length (Equivalent/ Actual)	m	260/220	260/220	260/220	260/220	260/220	260/220	
	Max. drop between I.U.&O.U (O.U up/down) *1	m	110/90	110/90	110/90	110/90	110/90	110/90	
	Standard drop between I.U.&O.U (O.U up/down) *2	m	50/40	50/40	50/40	50/40	50/40	50/40	
	Max. drop between I.U *3	m	30	30	30	30	30	30	
	Standard drop between I.U *4	m	18	18	18	18	18	18	
	External static pressure	Pa	110	110	110	110	110	110	
Connection Ratio	Connectable unit ratio	%	50-150 with limitation						
	Maximum number of indoor units		64	64	64	64	64	64	
Working Temp	Cooling	°C	-5~53						

Max. drop between I.U.&O.U *1
Standard drop between I.U.&O.U *2
Max. drop between I.U. *3
Standard drop between I.U. *4

If the height difference between the outdoor and the indoor units is from 50 to 110m, you MUST contact your local distributor/dealer for individual design and production.
Standard design and production in factory.
If the height difference between the indoor units is from 18 to 30m, you MUST contact your local distributor/dealer for individual design and production.
Standard design and production in factory.

*All the specification are tested under normal condition(In cooling, Indoor Temp. is 27 °C DB/19 °C WB; Outdoor Temp. 35 °C DB/24WB; In heating, Indoor Temp. is 20 °C DB. In heating, outdoor Temp. is 7 °C DB/6 °C WB)

VRFH-5C

Model			VRFH46-CD5C	VRFH48-CD5C	VRFH50-CD5C	VRFH52-CD5C	VRFH54-CD5C	VRFH56-CD5C	
Combination Model			VRFH22-CD5C	VRFH24-CD5C	VRFH24-CD5C	VRFH26-CD5C	VRFH26-CD5C	VRFH28-CD5C	
			VRFH24-CD5C	VRFH24-CD5C	VRFH26-CD5C	VRFH26-CD5C	VRFH28CD5C	VRFH28CD5C	
			/	/	/	/	/	/	
			/	/	/	/	/	/	
Capacity	Capacity range	HP	46	48	50	52	54	56	
	Cooling	kW	128.5	134.0	140.0	146.0	151.0	156.0	
	Power supply	Ph/V/Hz	3/380~415/50/60	3/380~415/50/60	3/380~415/50/60	3/380~415/50/60	3/380~415/50/60	3/380~415/50/60	
Electrical Parameters	Cooling	Rated Power input	kW	33.2	35.7	36.1	36.4	37.9	39.3
		Max. Power input	kW	67.0	67.3	67.6	67.8	68.2	68.5
		Rated current	A	56.1	60.3	60.9	61.5	63.9	66.3
		Max. current	A	108.9	109.4	109.9	110.5	110.9	111.4
	COP			3.87	3.75	3.88	4.01	3.99	3.97
	ISEER			6.81	6.69	6.67	6.65	6.62	6.60
	IPLV			6.84	6.70	6.70	6.71	6.68	6.65
Performance	Air flow (H)	m³/h	18000+19000	19000+19000	19000+19000	19000+19000	19000+19000	19000+19000	
	Sound pressure level (H)	dB(A)	67	67.0	67.0	67.0	67.0	67.0	
	Sound power level (H)	dB(A)	81	81.0	81.0	81.0	81.0	81.0	
Installation	External dimensions(W/D/H)	mm	1410/750/1690+1410/750/1690						
	Shipping dimensions(W/D/H)	mm	1515/850/1858+1515/850/1858						
	Net/ shipping weight	Kg	300/329+310/339	310/339+310/339	310/339+310/339				
	Compressor type		DC INV. Twin-Rotary						
	Compressor brand		MITSUBISHI ELECTRIC						
	Compressor quantity		2INV+2INV	2INV+2INV	2INV+2INV	2INV+2INV	2INV+2INV	2INV+2INV	
	Refrigerant type		R410A	R410A	R410A	R410A	R410A	R410A	
	Refrigerant charge	kg	10+10	10+10	10+10	10+10	10+10	10+10	
	Refrigerant liquid pipe	mm	19.05	19.05	19.05	19.05	19.05	19.05	
	Refrigerant gas pipe	mm	38.1	38.1	38.1	38.1	38.1	38.1	
	Max. total pipe lenght	m	1000	1000	1000	1000	1000	1000	
	Max. pipe length (Equivalent/ Actual)	m	260/220	260/220	260/220	260/220	260/220	260/220	
	Max. drop between I.U.&O.U (O.U up/down) *1	m	110/90	110/90	110/90	110/90	110/90	110/90	
	Standard drop between I.U.&O.U (O.U up/down) *2	m	50/40	50/40	50/40	50/40	50/40	50/40	
	Max. drop between I.U *3	m	30	30	30	30	30	30	
	Standard drop between I.U *4	m	18	18	18	18	18	18	
	External static pressure	Pa	110	110	110	110	110	110	
Connection Ratio	Connectable unit ratio	%	50-150 with limitation						
	Maximum number of indoor units		64	64	64	64	64	64	
Working Temp.	Cooling	℃	-5~53						

Max. drop between I.U.&O.U *1
Standard drop between I.U.&O.U *2
Max. drop between I.U. *3
Standard drop between I.U. *4

If the height difference between the outdoor and the indoor units is from 50 to 110m, you MUST contact your local distributor/dealer for individual design and production.
Standard design and production in factory.
If the height difference between the indoor units is from 18 to 30m, you MUST contact your local distributor/dealer for individual design and production.
Standard design and production in factory.

*All the specification are tested under normal condition(In cooling, Indoor Temp. is 27 °C DB/19 °C WB; Outdoor Temp. 35 °C DB/24WB; In heating, Indoor Temp. is 20 °C DB. In heating, outdoor Temp. is 7 °C DB/6 °C WB)

VRFH-5C

Model			VRFH58-CD5C	VRFH60-CD5C	VRFH62-CD5C	VRFH64-CD5C	VRFH66-CD5C	VRFH68-CD5C	
Combination Model			VRFH18-CD5C	VRFH20-CD5C	VRFH20-CD5C	VRFH20-CD5C	VRFH22-CD5C	VRFH22-CD5C	
			VRFH20-CD5C	VRFH20-CD5C	VRFH20-CD5C	VRFH22-CD5C	VRFH22-CD5C	VRFH22-CD5C	
			VRFH20-CD5C	VRFH20-CD5C	VRFH22-CD5C	VRFH22-CD5C	VRFH22-CD5C	VRFH24-CD5C	
			/	/	/	/	/	/	
Capacity	Capacity range	HP	58	60	62	64	66	68	
	Cooling	kW	162.0	168.0	173.5	179.0	184.5	190.0	
	Power supply	PhV/Hz	3/380~415/50/60	3/380~415/50/60	3/380~415/50/60	3/380~415/50/60	3/380~415/50/60	3/380~415/50/60	
Electrical Parameters	Cooling	Rated Power input	kW	40.1	41.8	43.2	44.7	46.1	48.6
		Max. Power input	kW	87.9	99.0	99.3	99.6	99.9	100.3
		Rated current	A	67.7	70.6	73.0	75.4	77.9	82.1
		Max. current	A	141.4	160.7	161.3	162.0	162.6	163.1
	COP			4.04	4.02	4.01	4.01	4.00	3.91
	ISEER			7.05	6.99	6.97	6.95	6.93	6.85
	IPLV			7.06	7.13	7.08	7.04	6.99	6.89
Performance	Air flow (H)	m³/h	13500+17000+17000	17000+17000+17000	17000+17000+18000	17000+18000+18000	18000+18000+18000	18000+18000+19000	
	Sound pressure level (H)	dB(A)	68	67	68	68	68	68	
	Sound power level (H)	dB(A)	82	81	82	82	82	82	
Installation	External dimensions(W/D/H)	mm	980/750/1690+1410/750/1690 +1410/750/1690	1410/750/1690+1410/750/1690+1410/750/1690					
	Shipping dimensions(W/D/H)	mm	1070/850/1858 +1515/850/1858+1515/850/1858	1515/850/1858+1515/850/1858+1515/850/1858					
	Net/ shipping weight	Kg	224/249+ 300/329+300/329	300/329+300/329 +300/329	310/339+310/339+310/339			300/329+300+ 329+310/339	
	Compressor type		DC INV. Twin-Rotary						
	Compressor brand		MITSUBISHI ELECTRIC						
	Compressor quantity		1INV+2INV+2INV	2INV+2INV+2INV	2INV+2INV+2INV	2INV+2INV+2INV	2INV+2INV+2INV	2INV+2INV+2INV	
	Refrigerant type		R410A	R410A	R410A	R410A	R410A	R410A	
	Refrigerant charge	kg	10+10+10	10+10+10	10+10+10	10+10+10	10+10+10	10+10+10	
	Refrigerant liquid pipe	mm	19.05	19.05	19.05	19.05	19.05	22.2	
	Refrigerant gas pipe	mm	41.3	41.3	41.3	41.3	41.3	44.5	
	Max. total pipe lenght	m	1000	1000	1000	1000	1000	1000	
	Max. pipe length (Equivalent/ Actual)	m	260/220	260/220	260/220	260/220	260/220	260/220	
	Max. drop between I.U.&O.U (O.U up/down) *1	m	110/90	110/90	110/90	110/90	110/90	110/90	
	Standard drop between I.U.&O.U (O.U up/down) *2	m	50/40	50/40	50/40	50/40	50/40	50/40	
	Max. drop between I.U *3	m	30	30	30	30	30	30	
	Standard drop between I.U *4	m	18	18	18	18	18	18	
	External static pressure	Pa	110	110	110	110	110	110	
Connection Ratio	Connectable unit ratio	%	50-130 with limitation						
	Maximum number of indoor units		64	64	64	64	64	64	
Working Temp	Cooling	°C	-5~53						

Max. drop between I.U.&O.U *1
Standard drop between I.U.&O.U *2
Max. drop between I.U. *3
Standard drop between I.U. *4

If the height difference between the outdoor and the indoor units is from 50 to 110m, you MUST contact your local distributor/dealer for individual design and production.
Standard design and production in factory.
If the height difference between the indoor units is from 18 to 30m, you MUST contact your local distributor/dealer for individual design and production.
Standard design and production in factory.

*All the specification are tested under normal condition(In cooling, Indoor Temp. is 27 °C DB/19 °C WB; Outdoor Temp. 35 °C DB/24WB; In heating, Indoor Temp. is 20 °C DB. In heating, outdoor Temp. is 7 °C DB/6 °C WB)

VRFH-5C

Model			VRFH70-CD5C	VRFH72-CD5C	VRFH74-CD5C	VRFH76-CD5C	VRFH78-CD5C	VRFH80-CD5C	
Combination Model			VRFH22-CD5C	VRFH24-CD5C	VRFH24-CD5C	VRFH24-CD5C	VRFH26-CD5C	VRFH26-CD5C	
			VRFH24-CD5C	VRFH24-CD5C	VRFH24-CD5C	VRFH26-CD5C	VRFH26-CD5C	VRFH26-CD5C	
			VRFH24-CD5C	VRFH24-CD5C	VRFH26-CD5C	VRFH26-CD5C	VRFH26-CD5C	VRFH28-CD5C	
			/	/	/	/	/	/	
Capacity	Capacity range	HP	70	72	74	76	78	80	
	Cooling	kW	195.5	201.0	207.0	213.0	219.0	224.0	
	Power supply	PhV/Hz	3/380~415/50/60	3/380~415/50/60	3/380~415/50/60	3/380~415/50/60	3/380~415/50/60	3/380~415/50/60	
Electrical Parameters	Cooling	Rated Power input	kW	51.1	53.6	53.9	54.3	54.6	56.1
		Max. Power input	kW	100.6	100.9	101.2	101.5	101.8	102.1
		Rated current	A	86.3	90.5	91.1	91.6	92.2	94.6
		Max. current	A	163.6	164.1	164.6	165.2	165.7	166.2
	COP			3.82	3.75	3.84	3.92	4.01	4.00
	ISEER			6.77	6.69	6.68	6.66	6.65	6.63
	IPLV			6.79	6.70	6.70	6.71	6.71	6.69
Performance	Air flow (H)	m³/h	18000+19000+19000	19000+19000+19000	19000+19000+19000	19000+19000+19000	19000+19000+19000	19000+19000+19000	
	Sound pressure level (H)	dB(A)	68.5	68.5	68.5	68.5	68.5	68.5	
	Sound power level (H)	dB(A)	82.5	82.5	82.5	82.5	82.5	82.5	
Installation	External dimensions(W/D/H)	mm	1410/750/1690+1410/750/1690+1410/750/1690						
	Shipping dimensions(W/D/H)	mm	1515/850/1858+1515/850/1858+1515/850/1858						
	Net/ shipping weight	Kg	310/339+329/359+329/359	329/359+329/359+329/359					
	Compressor type		DC INV. Twin-Rotary						
	Compressor brand		MITSUBISHI ELECTRIC						
	Compressor quantity		2INV+2INV+2INV	2INV+2INV+2INV	2INV+2INV+2INV	2INV+2INV+2INV	2INV+2INV+2INV	2INV+2INV+2INV	
	Refrigerant type		R410A	R410A	R410A	R410A	R410A	R410A	
	Refrigerant charge	kg	10+10+10	10+10+10	10+10+10	10+10+10	10+10+10	10+10+10	
	Refrigerant liquid pipe	mm	22.2	22.2	22.2	22.2	22.2	22.2	
	Refrigerant gas pipe	mm	44.5	44.5	44.5	44.5	44.5	44.5	
	Max. total pipe lenght	m	1000	1000	1000	1000	1000	1000	
	Max. pipe length (Equivalent/ Actual)	m	260/220	260/220	260/220	260/220	260/220	260/220	
	Max. drop between I.U.&O.U (O.U up/down) *1	m	110/90	110/90	110/90	110/90	110/90	110/90	
	Standard drop between I.U.&O.U (O.U up/down) *2	m	50/40	50/40	50/40	50/40	50/40	50/40	
	Max. drop between I.U *3	m	30	30	30	30	30	30	
	Standard drop between I.U *4	m	18	18	18	18	18	18	
	External static pressure	Pa	110	110	110	110	110	110	
Connection Ratio	Connectable unit ratio	%	50-130 with limitation						
	Maximum number of indoor units		64	64	64	64	64	64	
Working Temp	Cooling	°C	-5~53						

Max. drop between I.U.&O.U *1
Standard drop between I.U.&O.U *2
Max. drop between I.U. *3
Standard drop between I.U. *4

If the height difference between the outdoor and the indoor units is from 50 to 110m, you MUST contact your local distributor/dealer for individual design and production.
Standard design and production in factory.
If the height difference between the indoor units is from 18 to 30m, you MUST contact your local distributor/dealer for individual design and production.
Standard design and production in factory.

*All the specification are tested under normal condition(In cooling, Indoor Temp. is 27 °C DB/19 °C WB; Outdoor Temp. 35 °C DB/24WB; In heating, Indoor Temp. is 20 °C DB. In heating, outdoor Temp. is 7 °C DB/6 °C WB)

VRFH-5C

Model			VRFH82-CD5C	VRFH84-CD5C	VRFH86-CD5C	VRFH88-CD5C	VRFH90-CD5C	
Combination Model			VRFH26-CD5C	VRFH28-CD5C	VRFH20-CD5C	VRFH22-CD5C	VRFH22-CD5C	
			VRFH28-CD5C	VRFH28-CD5C	VRFH22-CD5C	VRFH22-CD5C	VRFH22-CD5C	
			VRFH28-CD5C	VRFH28-CD5C	VRFH22-CD5C	VRFH22-CD5C	VRFH22-CD5C	
			/	/	VRFH22-CD5C	VRFH22-CD5C	VRFH24-CD5C	
Capacity	Capacity range	HP	82	84	86	88	90	
	Cooling	kW	229.0	234.0	240.5	246.0	251.5	
	Power supply	PhV/Hz	3/380~415/50/60	3/380~415/50/60	3/380~415/50/60	3/380~415/50/60	3/380~415/50/60	
Electrical Parameters	Cooling	Rated Power input	kW	57.5	58.9	60.1	61.5	64.0
		Max. Power input	kW	102.4	102.7	132.9	133.2	133.6
		Rated current	A	97.1	99.5	101.4	103.8	108.0
		Max. current	A	166.6	167.1	216.2	216.8	217.3
	COP			3.98	3.97	4.00	4.00	3.93
	ISEER			6.61	6.60	6.95	6.93	6.87
	IPLV			6.67	6.65	7.03	6.99	6.91
Performance	Air flow (H)	m³/h	19000+19000+19000	19000+19000+19000	17000+18000 +18000+18000	18000+18000 +18000+18000	18000+18000 +18000+19000	
	Sound pressure level (H)	dB(A)	68.5	68.5	69.0	69.0	69.0	
	Sound power level (H)	dB(A)	82.5	82.5	82.5	82.5	83.0	
Installation	External dimensions(W/D/H)	mm	1410/750/1690+1410/750/1690+1410/750/1690			1410/750/1690+1410/750/1690+1410/750/1690+1410/750/1690		
	Shipping dimensions(W/D/H)	mm	1515/850/1858+1515/850/1858+1515/850/1858			1515/850/1858+1515/850/1858+1515/850/1858+1515/850/1858		
	Net/ shipping weight	Kg	329/359+329/359+329/359			310/339+310/339+310/339+310/339		310/339+310/339 +310/339+329/359
	Compressor type		DC INV. Twin-Rotary					
	Compressor brand		MITSUBISHI ELECTRIC					
	Compressor quantity		2INV+2INV+2INV	2INV+2INV+2INV	2INV+2INV+2INV+2INV			
	Refrigerant type		R410A	R410A	R410A	R410A	R410A	
	Refrigerant charge	kg	10+10+10	10+10+10	10+10+10+10	10+10+10+10	10+10+10+10	
	Refrigerant liquid pipe	mm	22.2	22.2	25.4	25.4	25.4	
	Refrigerant gas pipe	mm	44.5	44.5	50.8	50.8	50.8	
	Max. total pipe lenght	m	1000	1000	1000	1000	1000	
	Max. pipe length (Equivalent/ Actual)	m	260/220	260/220	260/220	260/220	260/220	
	Max. drop between I.U.&O.U (O.U up/down) *1	m	110/90	110/90	110/90	110/90	110/90	
	Standard drop between I.U.&O.U (O.U up/down) *2	m	50/40	50/40	50/40	50/40	50/40	
	Max. drop between I.U *3	m	30	30	30	30	30	
	Standard drop between I.U *4	m	18	18	18	18	18	
	External static pressure	Pa	110	110	110	110	110	
Connection Ratio	Connectable unit ratio	%	50-130 with limitation					
	Maximum number of indoor units		64	64	64	64	64	
Working Temp	Cooling	℃	-5~53					

Max. drop between I.U.&O.U *1
Standard drop between I.U.&O.U *2
Max. drop between I.U. *3
Standard drop between I.U. *4

If the height difference between the outdoor and the indoor units is from 50 to 110m, you MUST contact your local distributor/dealer for individual design and production.
Standard design and production in factory.
If the height difference between the indoor units is from 18 to 30m, you MUST contact your local distributor/dealer for individual design and production.
Standard design and production in factory.

*All the specification are tested under normal condition(In cooling, Indoor Temp. is 27 °C DB/19 °C WB; Outdoor Temp.35 °C DB/24WB; In heating, Indoor Temp. is 20 °C DB. In heating, outdoor Temp. is 7 °C DB/6 °C WB)

VRFH-5C

Model			VRFH92-CD5C	VRFH94-CD5C	VRFH96-CD5C	VRFH98-CD5C	VRFH100-CD5C	
Combination Model			VRFH22-CD5C	VRFH22-CD5C	VRFH24-CD5C	VRFH24-CD5C	VRFH24-CD5C	
			VRFH22-CD5C	VRFH24-CD5C	VRFH24-CD5C	VRFH24-CD5C	VRFH24-CD5C	
			VRFH24-CD5C	VRFH24-CD5C	VRFH24-CD5C	VRFH24-CD5C	VRFH26-CD5C	
			VRFH24-CD5C	VRFH24-CD5C	VRFH24-CD5C	VRFH26-CD5C	VRFH26-CD5C	
Capacity	Capacity range	HP	92	94	96	98	100	
	Cooling	kW	257.0	262.5	268.0	274.0	280.0	
	Power supply	PhV/Hz	3/380~415/50/60	3/380~415/50/60	3/380~415/50/60	3/380~415/50/60	3/380~415/50/60	
Electrical Parameters	Cooling	Rated Power input	kW	66.5	69.0	71.5	71.8	72.1
		Max. Power input	kW	133.9	134.2	134.6	134.8	135.1
		Rated current	A	112.2	116.4	120.7	121.2	121.8
		Max. current	A	217.8	218.3	218.8	219.3	219.9
	COP			3.87	3.81	3.75	3.82	3.88
	ISEER			6.81	6.75	6.69	6.68	6.67
	IPLV			6.84	6.77	6.70	6.70	6.70
Performance	Air flow (H)	m³/h	18000+18000 +19000+19000	18000+19000 +19000+19000	19000+19000 +19000+19000	19000+19000 +19000+19000	19000+19000 +19000+19000	
	Sound pressure level (H)	dB(A)	69.5	69.5	70.0	70.0	70.0	
	Sound power level (H)	dB(A)	83.5	83.5	84.0	84.0	84.0	
Installation	External dimensions(W/D/H)	mm	1410/750/1690+1410/750/1690+1410/750/1690+1410/750/1690					
	Shipping dimensions(W/D/H)	mm	1515/850/1858+1515/850/1858+1515/850/1858+1515/850/1858					
	Net/ shipping weight	Kg	310/339+310/339 +329/359+329/359	310/339+329/359 +329/359+329/359	329/359+329/359+329/359+329/359			
	Compressor type		DC INV. Twin-Rotary					
	Compressor brand		MITSUBISHI ELECTRIC					
	Compressor quantity		2INV+2INV+2INV+2INV					
	Refrigerant type		R410A	R410A	R410A	R410A	R410A	
	Refrigerant charge	kg	10+10+10+10	10+10+10+10	10+10+10+10	10+10+10+10	10+10+10+10	
	Refrigerant liquid pipe	mm	25.4	25.4	25.4	25.4	25.4	
	Refrigerant gas pipe	mm	50.8	50.8	50.8	54.1	54.1	
	Max. total pipe lenght	m	1000	1000	1000	1000	1000	
	Max. pipe length (Equivalent/ Actual)	m	260/220	260/220	260/220	260/220	260/220	
	Max. drop between I.U.&O.U (O.U up/down) *1	m	110/90	110/90	110/90	110/90	110/90	
	Standard drop between I.U.&O.U (O.U up/down) *2	m	50/40	50/40	50/40	50/40	50/40	
	Max. drop between I.U *3	m	30	30	30	30	30	
	Standard drop between I.U *4	m	18	18	18	18	18	
	External static pressure	Pa	110	110	110	110	110	
Connection Ratio	Connectable unit ratio	%	50-130 with limitation					
	Maximum number of indoor units		64	64	64	64	64	
Working Temp	Cooling	℃	-5~53					

If the height difference between the outdoor and the indoor units is from 50 to 110m, you MUST contact your local distributor/dealer for individual design and production.
Standard design and production in factory.
If the height difference between the indoor units is from 18 to 30m, you MUST contact your local distributor/dealer for individual design and production.
Standard design and production in factory.

VRFH-5C

Model			VRFH102-CD5C	VRFH104-CD5C	VRFH106-CD5C	VRFH108-CD5C	VRFH110-CD5C	VRFH112-CD5C	
Combination Model			VRFH24-CD5C	VRFH26-CD5C	VRFH26-CD5C	VRFH26-CD5C	VRFH26-CD5C	VRFH28-CD5C	
			VRFH26-CD5C	VRFH26-CD5C	VRFH26-CD5C	VRFH26-CD5C	VRFH28-CD5C	VRFH28-CD5C	
			VRFH26-CD5C	VRFH26-CD5C	VRFH26-CD5C	VRFH28-CD5C	VRFH28-CD5C	VRFH28-CD5C	
			VRFH26-CD5C	VRFH26-CD5C	VRFH28-CD5C	VRFH28-CD5C	VRFH28-CD5C	VRFH28-CD5C	
Capacity	Capacity range	HP	102	104	106	108	110	112	
	Cooling	kW	286.0	292.0	297.0	302.0	307.0	312.0	
	Power supply	Ph/V/Hz	3/380~415/50/60	3/380~415/50/60	3/380~415/50/60	3/380~415/50/60	3/380~415/50/60	3/380~415/50/60	
Electrical Parameters	Cooling	Rated Power input	kW	72.5	72.8	74.3	75.7	77.1	78.6
		Max. Power input	kW	135.4	135.7	136.0	136.3	136.6	137.0
		Rated current	A	122.4	122.9	125.4	127.8	130.2	132.7
		Max. current	A	220.4	220.9	221.4	221.9	222.3	222.8
	COP			3.95	4.01	4.00	3.99	3.98	3.97
	ISEER			6.66	6.65	6.64	6.62	6.61	6.60
	IPLV			6.71	6.71	6.69	6.68	6.67	6.65
Performance	Air flow (H)	m³/h	19000+19000+19000+19000						
	Sound pressure level (H)	dB(A)	70.0	70.0	70.0	70.0	70.0	70.0	
	Sound power level (H)	dB(A)	84.0	84.0	84.0	84.0	84.0	84.0	
Installation	External dimensions(W/D/H)	mm	1410/750/1690+1410/750/1690+1410/750/1690+1410/750/1690						
	Shipping dimensions(W/D/H)	mm	1515/850/1858+1515/850/1858+1515/850/1858+1515/850/1858						
	Net/ shipping weight	Kg	329/359+329/359+329/359+329/359						
	Compressor type		DC INV. Twin-Rotary						
	Compressor brand		MITSUBISHI ELECTRIC						
	Compressor quantity		2INV+2INV+2INV+2INV						
	Refrigerant type		R410A	R410A	R410A	R410A	R410A	R410A	
	Refrigerant charge	kg	10+10+10+10	10+10+10+10	10+10+10+10	10+10+10+10	10+10+10+10	10+10+10+10	
	Refrigerant liquid pipe	mm	25.4	25.4	28.58	28.58	28.58	28.58	
	Refrigerant gas pipe	mm	54.1	54.1	66.70	66.70	66.70	66.70	
	Max. total pipe lenght	m	1000	1000	1000	1000	1000	1000	
	Max. pipe length (Equivalent/ Actual)	m	260/220	260/220	260/220	260/220	260/220	260/220	
	Max. drop between I.U.&O.U (O.U up/down) *1	m	110/90	110/90	110/90	110/90	110/90	110/90	
	Standard drop between I.U.&O.U (O.U up/down) *2	m	50/40	50/40	50/40	50/40	50/40	50/40	
	Max. drop between I.U *3	m	30	30	30	30	30	30	
	Standard drop between I.U *4	m	18	18	18	18	18	18	
	External static pressure	Pa	110	110	110	110	110	110	
Connection Ratio	Connectable unit ratio	%	50-130 with limitation						
	Maximum number of indoor units		64	64	64	64	64	64	
Working Temp	Cooling	°C	-5~53						

Max. drop between I.U.&O.U *1
Standard drop between I.U.&O.U *2
Max. drop between I.U. *3
Standard drop between I.U. *4

If the height difference between the outdoor and the indoor units is from 50 to 110m, you MUST contact your local distributor/dealer for individual design and production.
Standard design and production in factory.
If the height difference between the indoor units is from 18 to 30m, you MUST contact your local distributor/dealer for individual design and production.
Standard design and production in factory.

*All the specification are tested under normal condition(In cooling, Indoor Temp. is 27 °C DB/19 °C WB; Outdoor Temp. 35 °C DB/24WB; In heating, Indoor Temp. is 20 °C DB. In heating, outdoor Temp. is 7 °C DB/6 °C WB)



Mini VRF

- New capacity 3, 5 and 7HP modules
- More Powerful with super large diameter 550mm fan
- The heat transfer effect is increased by 10% (5/7HP)
- The new module upgrade 56°C high temperature cleaning technology



03/05/07HP



08/10/12HP

mini VRF

FEATURES & BENEFITS

ENERGY SAVING

High efficiency DC INVERTER compressor



VECTOR INVERTER CONTROL

180 degree sine wave vector control,
64-bit operation


TWIN ROTARY DC INVERTER

High chamber DC Inverter twin rotary compressor
Small vibration, Low noise, High efficiency

DOUBLE PRESSURE SENSOR


Equipped with high and low voltage pressure
double sensor

High EER and COP

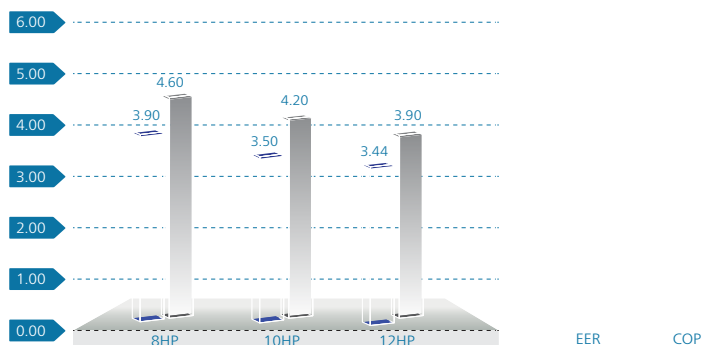

DC Fan and Fan motor



- DC inverter fan motor more higher efficiency in part load running
- 16-stang speed control : high efficiency running especially in low speed
- Efficiency increase 45% comparing with AC motor and power input largely decrease

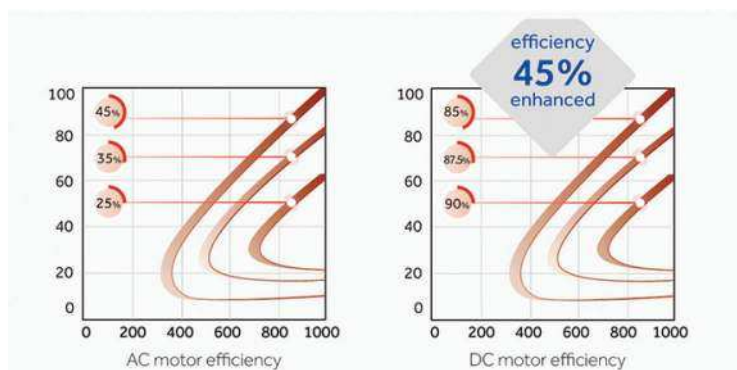

COMFORT

Double pressure sensors, $\pm 0.5^{\circ}\text{C}$ temp. precise control

- Double pressure sensor with PID control technology
- Together with high speed communication to realize the quick start of compressor and more precise control, the temperature can be control $\pm 0.5^{\circ}\text{C}$

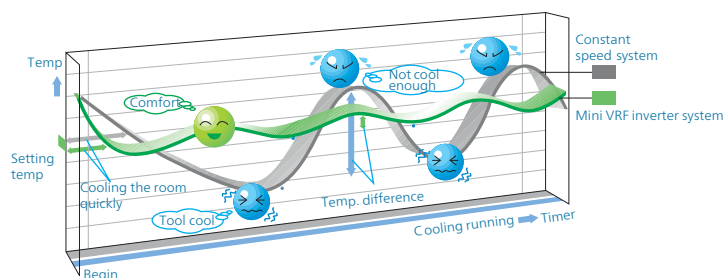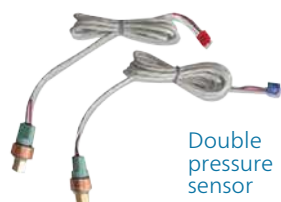

Night time Quiet operation at 10db(A) reduced sound level

When quiet operation is required, this function can be configured by outdoor PCB to greatly reduce sound level.





550mm big fan, lowering sound level 3 dB(A)

DC fan motor, low sound level

Air flow direction follows the grill direction
lowering sound level 2-4 dB(A)

Automatic sound-lowering program
Night mode set by PCB, 8 dB(A) lower

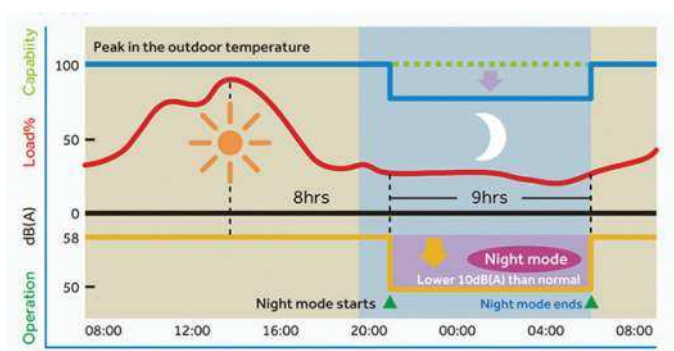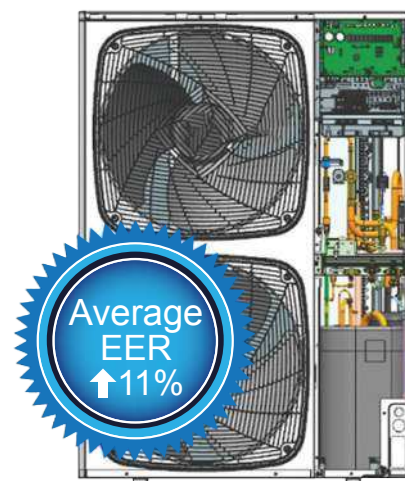


FEATURES & BENEFITS

CONVENIENCE

Long pipe length, high height drop

- Total pipe length 300m.
- Single pipe length Max. 175m
- From outdoor to the first branch pipe 135.
- From the first branch to the farthest indoor door unit 40m
- Height drop 50m (out above) / 40m (outdoor below)
- Height drop between indoor units 15m

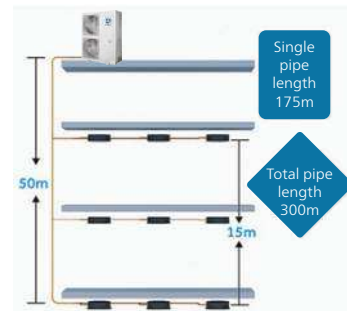


Easy installation

Compact side discharge design, Big capacity, Small Footprint only 0.42m² 43% floor area can be reduced



No need additional ventilation hood comparing with top discharge unit

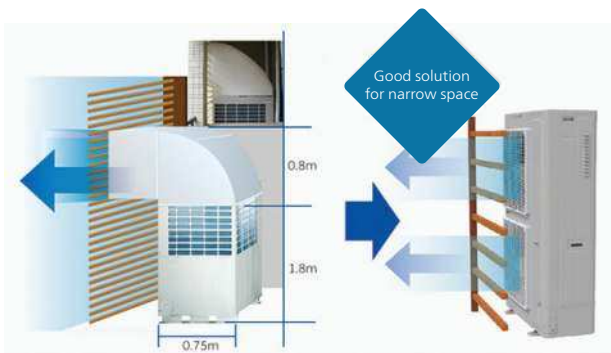

Separate refrigerant charging valve

Easy for refrigerant charging valve



Four-way pipe connection

4-way connection (front, rear, right, down) pipe connection, flexible installation.





MINI VRF

Model			VRFH-32-CD2S	VRFH-52-CD2S	VRFH-72-CD2S
Capacity	Capacity range	HP	3	5	7
	Cooling	kBtu/h	27.3	51.2	61.4
		kW	8	14	18
	Heating	kBtu/h	32.4	58	68.2
		kW	9.5	16	20
Electrical Parameters	Power supply	Ph/V/Hz	1/220-240/50/60	1/220-240/50/60	1/220-240/50/60
	Power input (Cooling)	kW	2.20	3.70	4.75
	Power input (Heating)	kW	2.20	3.73	4.56
	COP Cooling/Heating	/	3.64/4.32	3.78/4.29	3.79/4.39
Performance	Air flow (H)	m³/h	4500	7200	7200
Installation	External dimensions(W/D/H)	mm	920x372x756	950x370x1340	950x370x1340
	Shipping dimensions(W/D/H)	mm	1036x478x820	1023/483/1492	1023/483/1492
	Net/Shipping weight	kg	61/67	108/123	108/123
	Compressor quantity		1	1	1
	Refrigerant type		R410A	R410A	R410A
	Refrigerant charge	kg	2.1	4	4
	Refrigerant liquid pipe	mm	9.52	9.52	9.52
	Refrigerant gas pipe	mm	15.88	15.88	19.05
	Total pipe length	m	120	150	150
Connection Ratio	Max. drop between indoor and outdoor : Outdoor in the top/Indoor unit in the bottom (m)	m	30/20	30/20	30/20
	Connectable indoor unit ratio	%	50~130%	50~130%	50~130%
Working temp.	Maximum number of indoor units	/	4	8	9
	Cooling	°C	-5°C~50°C	-5°C~50°C	-5°C~50°C
Working temp.	Heating	°C	-20°C~27°C	-20°C~27°C	-20°C~27°C



MINI VRF

Model			VRFH08-CD3S	VRFH10-CD3S	VRFH12-CD3S
Capacity	Capacity range	HP	8	10	12
	Cooling	kBtu/h	77.1	95.5	107.5
		kW	22.6	28	31.5
	Heating	kBtu/h	77.1	104.1	107.5
		kW	22.6	30.5	31.5
Electrical Parameters	Power supply	Ph/V/Hz	3/380-400/50/60	3/380-400/50/60	3/380-400/50/60
	Power input (Cooling)	kW	6.46	8.75	10.16
	Power input (Heating)	kW	5.79	8.03	8.51
	COP Cooling/Heating	/	3.5/3.9	3.20/3.80	3.10/3.70
Performance	Air flow (H)	m³/h	10020	10020	10020
Installation	External dimensions(W/D/H)	mm	1050/400/1636	1050/400/1636	1050/400/1636
	Shipping dimensions(W/D/H)	mm	1150/510/1790	1150/510/1795	1150/510/1795
	Net/Shipping weight	kg	149/168	149/168	149/168
	Compressor quantity		1	1	1
	Refrigerant type		R410A	R410A	R410A
	Refrigerant charge	kg	5.1	5.1	5.1
	Refrigerant liquid pipe	mm	9.52	9.52	9.52
	Refrigerant gas pipe	mm	19.05	22.22	25.40
	Total pipe length	m	300	300	300
Connection Ratio	Max. drop between indoor and outdoor : Outdoor in the top/Indoor unit in the bottom (m)	m	175/150	175/150	175/150
	Connectable indoor unit ratio	%	50~130%	50~130%	50~130%
Working temp.	Maximum number of indoor units	/	13	16	16
	Cooling	°C	-5°C~48°C	-15°C~48°C	-5°C~48°C
Working temp.	Heating	°C	-20°C~27°C	-20°C~27°C	-20°C~27°C



Option



Option



THW-SA301AFK

TYR-HQS01

- Compact design: only 290mm height
- Built in high head drain pump
- Ceiling antifouling design
unique antifouling design
- Quiet operation
- EXV Control

[illegible]

MINI 4 WAY CASSETTE

STANDARD



TYR-HQS01

OPTION



THW-SA201ABK



TYR-HRS01



- Compact design
- New panel design 620*620mm
- Fresh air outlet
- Low sound level
- EXV Control



Model/Indoor unit			FCS4H12V-AD1(M)	FCS4H16V-AD1(M)	FCS4H18V-AD1(M)
Capacity	Cooling	kBtu/h	12.3	15.3	19.1
		kW	3.6	4.5	5.6
	Heating	kBtu/h	13.6	17.1	21.5
		kW	4.0	5.0	6.3
Electrical Parameters	Power supply	Ph/V/Hz	1/220-240/50/60	1/220-240/50/60	1/220-240/50/60
Performance	Air flow (H/M/L)	m³/h	700/590/480	700/590/480	700/590/480
	Sound pressure level (H/M/L)	dB (A)	32/30/29	33/30/29	33/30/29
	Sound power level (H/M/L)	dB (A)	46/44/43	47/44/43	47/44/43
Installation	External dimensions (W/D/H)	mm	570/570/260	570/570/260	570/570/260
	Shipping dimensions (W/D/H)	mm	718/680/380	718/680/380	718/680/380
	Net/Shipping weight	kg	19/23	19/23	19/23
	Refrigerant liquid pipe	mm	6.35	6.35	6.35
	Refrigerant gas pipe	mm	12.7	12.7	12.7
Panel	Model Name		TPB-620KB	TPB-620KB	TPB-620KB
	External dimensions (W/D/H)	mm	620/620/60	620/620/60	620/620/60
	Shipping dimensions (W/D/H)	mm	660/660/115	660/660/115	660/660/115
	Net/Shipping weight	kg	3.1/4.8	3.1/4.8	3.1/4.8
Controller	Wired (Optional)	/	THW-SA201ABK	THW-SA201ABK	THW-SA201ABK
	Infrared (Optional)	/	TYR-HRS01	TYR-HRS01	TYR-HRS01

A digital scale with a black display showing '0.00g' and a white display showing '0.00g'.

- Compact design
- New panel design 950*950mm
- Fresh air outlet
- Low sound level
- EXV Control

[illegible]

STANDARD



TYR-HQS01

OPTION



THW-SA201ABK


TYR-HRS01



- DC Motor
- Capacity up to 7.1 kW
- Ultra thin design 185mm
- Built-in high head drain pump maxi. 1000mm
- EXV Control

[illegible]

CONVERTIBLE

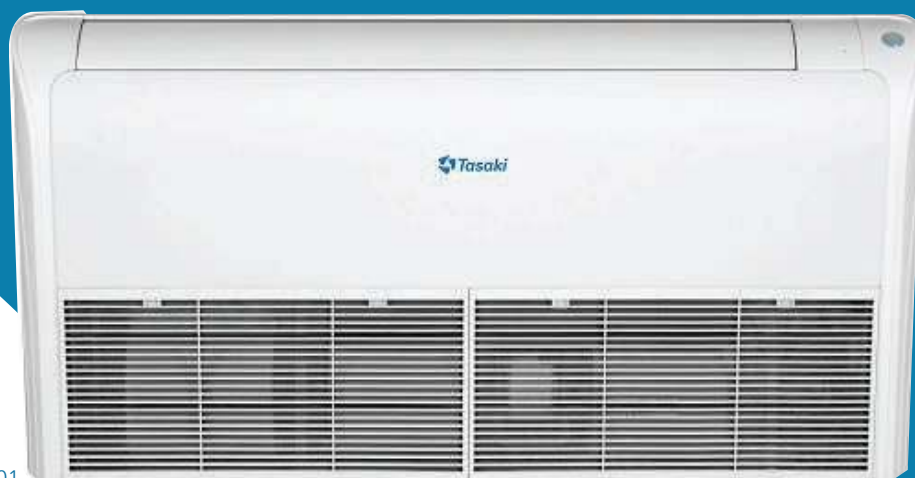

OPTION

STANDARD



THW-SA201ABK TYR-HRS01 TYR-HQS01

- New outlook
- DC fan motor
- Flexible installation,
on the floor or on the ceiling
- Automatic horizontal and vertical swing
- Reserved fresh air inlet
- Multiple direction for connection pipe setting



Model/indoor unit			FUH09V-AD2	FUH12V-AD2	FUH16V-AD2	FUH18V-AD2
Capacity	Cooling	**kBTu/h	9.5	12.7	15.3	19.1
		**kW	2.8	3.6	4.5	5.6
	Heating	Btu/h	10.5	13.6	17.1	21.5
		kW	3.2	4.0	5	6.3
Electrical Parameters	Power supply	Ph/V/Hz	1,220~230,50/60	1,220~230,50/60	1,220~230,50/60	1,220~230,50/60
	Rate Current	A	0.14	0.14	0.16	0.16
	Rate Power Input	kW	3.0	3.0	3.0	3.0
Performance	Air flow (H)	m ³ /h	820/750/690	820/750/690	950/820/690	950/820/690
	Sound pressure level (H/M/L)	dB(A)	38/36/34	38/36/34	42/38/35	42/38/35
Installation	External dimensions (W/D/H)	mm	1000/230/680	1000/230/680	1000/230/680	1000/230/680
	Shipping dimensions(W/D/H)	mm	1100/305/779	1100/305/779	1100/305/779	1100/305/779
	Net/Shipping weight	kg	27.9/33.6	27.9/33.6	27.9/33.6	27.9/33.6
	Liquid pipe	mm	6.35	6.35	6.35	6.35
	Gas pipe	mm	9.52	9.52	12.7	12.7
	Drain hose	mm	20	20	20	20
Controller	Wired (standard)	/	THW-SA201ABK	THW-SA201ABK	THW-SA201ABK	THW-SA201ABK
	Infrared (Optional)	/	TYR-HRS01	TYR-HRS01	TYR-HRS01	TYR-HRS01

Notes: 1. * Cooling conditioner : indoor 27 °CDB / 19 °CWB, Outdoor 35 °CDB

CONVERTIBLE

STANDARD



THW-SA201ABK


OPTION



TYR-HRS01



TYR-HQS01

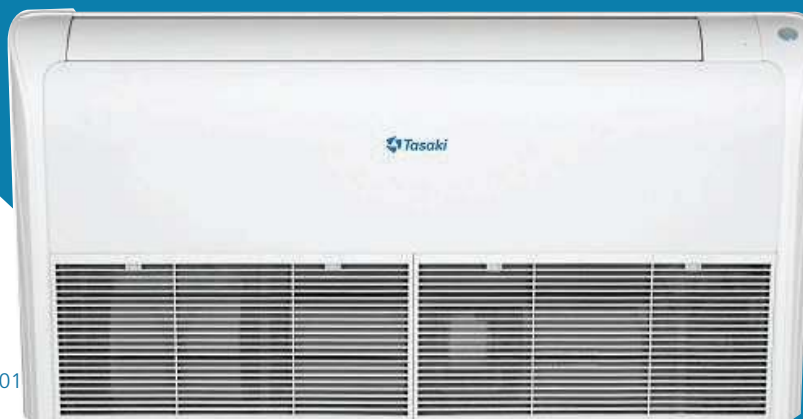

- New outlook
- DC fan motor
- Flexible installation,
on the floor or on the ceiling
- Automatic horizontal and vertical swing
- Reserved fresh air inlet
- Multiple direction for connection pipe setting



Model/indoor unit			FUH24V-AD2	FUH28V-AD2	FUH30V-AD2	FUH38V-AD2	FUH48V-AD2
Capacity	Cooling	**kBtu/h	24.2	27.3	30.7	38.2	47.7
		**kW	7.1	8	9	11.2	14.0
	Heating	Btu/h	27.3	30.7	34.1	42.6	54.6
		kW	8.0	9	10	12.5	16.0
Electrical Parameters	Power supply	Ph/V/Hz	1,220~230,50/60	1,220~230,50/60	1,220~230,50/60	1,220~230,50/60	1,220~230,50/60
	Rate Current	A	0.16	0.23	0.23	0.23	0.23
	Rate Power Input	kW	3.0	3.0	3.0	3.0	3.0
Performance	Air flow (H)	m ³ /h	950/820/690	1570/1420/1240	1570/1420/1240	1570/1420/1240	1570/1420/1240
	Sound pressure level (H/M/L)	dB(A)	42/38/35	47/44/41	47/44/41	47/44/41	47/44/41
Installation	External dimensions (W/D/H)	mm	1000/230/680	1325/230/680	1325/230/680	1325/230/680	1325/230/680
	Shipping dimensions(W/D/H)	mm	1100/305/779	1425/305/779	1425/305/779	1425/305/779	1425/305/779
	Net/Shipping weight	kg	27.9/33.6	35.8/42.1	35.8/42.1	35.8/42.1	35.8/42.1
	Liquid pipe	mm	6.35	9.52	9.52	9.52	9.52
	Gas pipe	mm	12.7	15.88	15.88	15.88	15.88
	Drain hose	mm	20	25	25	25	25
Controller	Wired (standard)	/	THW-SA201ABK	THW-SA201ABK	THW-SA201ABK	THW-SA201ABK	THW-SA201ABK
	Infrared (Optional)	/	TYR-HRS01	TYR-HRS01	TYR-HRS01	TYR-HRS01	TYR-HRS01


DUCT SLIM LOW ESP



THW-SA201ABK



- Super slim design, only 185mm
- Reserved fresh air inlet
- Built-in high head drain pump
- Friendly design of rear or bottom air return
- Quiet operation
- Static pressure 0/30Pa
- EXV Control



Model/Indoor unit			FIHS07V-AD1	FIHS09V-AD1	FIHS12V-AD1
Capacity	Cooling	** kBTu/h	7.5	9.5	12.3
		** kW	2.2	2.8	3.6
	Heating	kBTu/h	8.5	10.5	13.6
		kW	2.5	3.2	4.0
Electrical Parameters	Power supply	Ph/V/Hz	1/220~230,50/60	1/220~230,50/60	1/220~230,50/60
	Rate Current	A	0.26	0.26	0.26
	Rate Power Input	kW	0.056	0.056	0.056
Performance	Air flow (H/M/L)	m3/h	480/420/360	480/420/360	550/430/370
	Sound pressure level (H/M/L)	dB (A)	27/24/21	27/24/21	30/28/25
Installation	External dimensions (W/D/H)	mm	850/185/420	850/185/420	850/185/420
	Shipping dimensions (W/D/H)	mm	1045/270/540	1045/270/540	1045/270/540
	Net/Shipping weight	kg	17.5/22.5	17.5/22.5	17.5/22.5
	Liquid pipe	mm	6.35	6.35	6.35
	Gas pipe	mm	9.52	9.52	12.7
	Drain hose	mm	25	25	25
	Static Pressure (Standard/Max.)	Pa	0/30	0/30	0/30
Panel (optional)	Panel model	/	P1B-890IA/D	P1B-890IA/D	P1B-890IA/D
	External dimensions (W/D/H)	mm	890/190/100 (outlet panel)	890/190/100 (outlet panel)	890/190/100 (outlet panel)
		mm	890/290.5/32.4 (inlet panel)	890/290.5/32.4 (inlet panel)	890/290.5/32.4 (inlet panel)
	Shipping dimensions (W/D/H)	mm	938/335/220	938/335/220	938/335/220
	Net/Shipping weight	Kg	4/5	4/5	4/5
Controller	Wired (O-Optional/S-Standard)	/	THW-SA201ABK	THW-SA201ABK	THW-SA201ABK

DUCT SLIM LOW ESP



THW-SA201ABK



- Super slim design, only 185mm
- Reserved fresh air inlet
- Built-in high head drain pump
- Friendly design of rear or bottom air return
- Quiet operation
- Static pressure 0/30Pa
- EXV Control



Model/Indoor unit			FIHS16V-AD1	FIHS18V-AD1	FIHS24V-AD1
Capacity	Cooling	** kBtu/h	15.3	19.1	24.2
		** kW	4.5	5.6	7.1
	Heating	kBtu/h	17.1	21.5	27.3
		kW	5.0	6.3	8.0
Electrical Parameters	Power supply	Ph/V/Hz	1/220~230,50/60	1/220~230,50/60	1/220~230,50/60
	Rate Current	A	0.3	0.37	0.54
	Rate Power Input	kW	0.065	0.08	0.117
Performance	Air flow (H/M/L)	m3/h	600/540/460	800/690/580	930/850/750
	Sound pressure level (H/M/L)	dB (A)	33/30/27	33/30/28	36/33/31
Installation	External dimensions (W/D/H)	mm	850/185/420	1170/185/420	1170/185/420
	Shipping dimensions (W/D/H)	mm	1045/270/540	1365/270/540	1365/270/540
	Net/Shipping weight	kg	18.5/23.5	22.2/28.2	24/30
	Liquid pipe	mm	6.35	6.35	9.52
	Gas pipe	mm	12.7	12.7	15.88
	Drain hose	mm	25	25	25
	Static Pressure (Standard/Max.)	Pa	0/30	0/30	0/30
Panel (optional)	Panel model	/	P1B-890IA/D	P1B-1210IA/D	P1B-1210IA/D
	External dimensions (W/D/H)	mm	890/190/100 (outlet panel)	1210/190/100 (outlet panel)	1210/190/100 (outlet panel)
		mm	890/290.5/32.4 (inlet panel)	1210/290.5/32.4 (inlet panel)	1210/290.5/32.4 (inlet panel)
	Shipping dimensions (W/D/H)	mm	938/335/220	1258/335/220	1258/335/220
	Net/Shipping weight	Kg	4/5	5/6	5/6
Controller	Wired (O-Optional/S-Standard)	/	THW-SA201ABK	THW-SA201ABK	THW-SA201ABK

DUCT MEDIUM ESP



THW-SA201ABK

- New compact design:248mm height
- Flexible duct connection
- Static pressure 50/100Pa
- EXV Control



Group
control

Central
control



Model/Indoor unit			FDMH05V-AD3	FDMH07V-AD3	FDMH09V-AD3	FDMH12V-AD3	FDMH16V-AD3	FDMH18V-AD3
Capacity	Cooling	* kBtu/h	5.1	7.5	10.0	12.7	16.1	19.9
		**kBtu/h	-	-	9.5	12.3	15.3	19.1
		** kW	1.5	2.2	2.8	3.6	4.5	5.6
	Heating	kBtu/h	5.8	8.5	10.9	13.6	17.1	21.5
		kW	1.7	2.5	3.2	4.0	5.0	6.3
Electrical Parameters	Power supply	Ph/V/Hz	1/220~240/50/60	1/220~240/50/60	1,220~230,50/60	1,220~230,50/60	1,220~230,50/60	1,220~230,50/60
	Rate Current	A	-	-	0.5	0.5	0.6	0.66
	Rate Power Input	kW	-	-	0.105	0.105	0.125	0.137
Performance	Air flow (H/M/L)	m³/h	630/510/424	630/510/424	630/510/424	630/510/424	740/550/442	980/840/760
	Sound pressure level (H/M/L)	dB (A)	35/33/31	35/33/31	35/33/31	35/33/31	35/33/31	36/34/32
	Sound power level (H/M/L)	dB (A)	39/37/35	39/37/35	39/37/35	39/37/35	39/37/35	40/38/36
Installation	External dimensions (W/D/H)	mm	700/700/248	700/700/248	700/700/248	700/700/248	700/700/248	1100/700/248
	Shipping dimensions (W/D/H)	mm	932/835/280	932/835/280	932/835/280	932/835/280	932/835/280	1332/835/280
	Net/Shipping weight	kg	27/32	27/32	27/32	27/32	28.5/33.5	36.8/43.4
	Liquid pipe	mm	6.35	6.35	6.35	6.35	6.35	6.35
	Gas pipe	mm	9.52	9.52	9.52	12.7	12.7	12.7
	Drain hose	mm	-	-	25	25	25	25
	Static Pressure (Standard/Max.)	Pa	50/100	50/100	50/100	50/100	50/100	50/100
Drain pump	O-optional,S-standard,V-without	/	S	S	S	S	S	S
Controller	Wired(O-Optional/S-Standard)	/	THW-BA116ABK	THW-BA116ABK	THW-SA201ABK	THW-SA201ABK	THW-SA201ABK	THW-SA201ABK

Noter : 1. * Cooling conditioner : indoor 27°CDB / 19.5°CWB, Outdoor 35°CDB
2. ** Cooling conditioner : indoor 27°CDB / 19 °CWB, Outdoor 35°CDB

DUCT MEDIUM ESP



THW-SA201ABK

- New compact design: 248mm height
- Flexible duct connection
- Static pressure 50/100Pa
- EXV Control



Group
control

Central
control



Model/Indoor unit			FDMH24V-AD3	FDMH28V-AD3	FDMH30V-AD3	FDMH38V-AD3	FDMH48V-AD3
Capacity	Cooling	* kBtu/h	25.0	28.1	31.8	39.7	49.6
		**kBtu/h	24.2	27.3	30.7	38.2	47.7
		** kW	7.1	8.0	9	11.2	14
	Heating	kBtu/h	27.3	30.7	34.1	44.3	55.6
		kW	8.0	9.0	10	13	16.3
Electrical Parameters	Power supply	Ph/V/Hz	1,220~230,50/60	1,220~230,50/60	1,220~230,50/60	1,220~230,50/60	1,220~230,50/60
	Rate Current	A	0.9	0.9	1.05	1.07	1.32
	Rate Power Input	kW	0.190	0.190	0.23	0.35	0.29
Performance	Air flow (H/M/L)	m ³ /h	1174/1080/960	1174/1080/960	1500/1180/930	1700/1300/900	2000/1700/1250
	Sound pressure level (H/M/L)	dB (A)	40/37/34	42/38/34	42/38/34	42/39/35	43/40/35
	Sound power level (H/M/L)	dB (A)	44/41/38	46/42/38	46/42/38	46/43/39	47/44/39
Installation	External dimensions (W/D/H)	mm	1100/700/248	1100/700/248	1100/700/248	1500/700/248	1500/700/248
	Shipping dimensions (W/D/H)	mm	1332/835/280	1332/835/280	1332/835/280	1698/857/305	1698/857/305
	Net/Shipping weight	kg	37/43.6	37/43.6	39.4/45.4	48.3/56.5	51.3/59.5
	Liquid pipe	mm	9.52	9.52	9.52	9.52	9.52
	Gas pipe	mm	15.88	15.88	15.88	15.88	15.88
	Drain hose	mm	25	25	25	25	25
	Static Pressure (Standard/Max.)	Pa	50/100	50/100	50/100	50/100	50/100
Drain pump	O-optional,S-standard,W-without	/	S	S	S	S	S
Controller	Wired(O-Optional/S-Standard)	/	THW-SA201ABK	THW-SA201ABK	THW-SA201ABK	THW-SA201ABK	THW-SA201ABK

Notes: 1. * Cooling conditioner : indoor 27°CDB / 19.5°CWB, Outdoor 35°CDB
 2. ** Cooling conditioner : indoor 27°CDB / 19 °CWB, Outdoor 35°CDB

DUCT HIGH ESP



THW-SA201ABK

- Flexible duct connection
- Easy to maintain
- Variable static pressure 100/250Pa setting
- EXV Control



Model/Indoor unit			FDHH72V-AD2	FDHH96V-AD2
Capacity	Cooling	* kBtu/h	81.0	98.1
		** kBtu/h	77.1	95.6
		** kW	22.6	28.0
	Heating	Btu/h	86	107.5
		kW	25.2	31.5
Electrical Parameters	Power supply	Ph/V/Hz	1/220~230/50/60	1/220~230/50/60
	Rate Current	A	5.05	5.05
	Rate Power Input	kW	1.11	1.11
Performance	Air flow (S/H/M/L)	m ³ /h	4200/3750/3330/2800	4200/3750/3330/2800
	Sound pressure level (S/H/M/L)	dB (A)	54/51/49/47	54/51/49/47
	Sound power level (S/H/M/L)	dB (A)	68/65/63/61	68/65/63/61
Installation	External dimensions (W/D/H)	mm	1333/748/495	1333/748/495
	Shipping dimensions (W/D/H)	mm	1558/896/668	1558/896/668
	Net/Shipping weight	kg	87/109	87/109
	Refrigerant liquid pipe	mm	9.52	9.52
	Refrigerant gas pipe	mm	25.4	25.4
	Static Pressure (Standard/Max.)	Pa	100/250	100/250
Controller	Wired (O-Optional/S-Standard)	/	THW-SA201ABK	THW-SA201ABK

Noter : 1. * Cooling conditioner : indoor 27°CDB / 19.5°CWB, Outdoor 35°CDB
 2. ** Cooling conditioner : indoor 27°CDB / 19 °CWB, Outdoor 35°CDB

HIGH WALL

OPTION



TYR-HQS01




THW-SA201ABK

STANDARD



TYR-HRS01

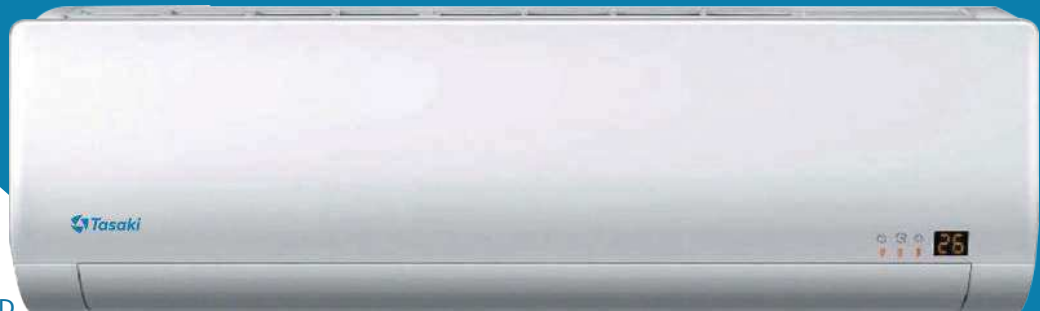

- Stylish design & LED display
- Automatic horizontal and vertical swing
- Built in EEV, easy to installation
- Negative ion, vitamin C, and ESF filter optional
- EXV Control



Model/Indoor unit			FWH092-AD2	FWH122-AD2	FWH162-AD2	FWH182-AD2	FWH242-AD2	FWH282-AD2	FWH302-AD2
Capacity	Cooling	* kBtu/h	10.0	12.7	16.1	19.9	25.0	28.1	31.8
		**kBtu/h	9.5	12.3	15.3	19.1	24.2	27.3	30.7
		** kW	2.8	3.6	4.5	5.6	7.1	8.0	9.0
	Heating	Btu/h	10.9	13.6	17.1	21.5	27.3	30.7	34.1
		kW	3.2	4.0	5.0	6.3	8.0	9.0	10.0
Electrical Parameters	Power supply	Ph/V/Hz	1/220~230,50/60	1/220~230,50/60	1/220~230,50/60	1,220~230,50/60	1,220~230,50/60	1,220~230,50/60	11,220~230,50/60
	Rate Current	A	0.15	0.15	0.5	0.5	0.5	0.59	0.59
	Rate Power Input	kW	0.043	0.043	0.057	0.057	0.057	0.099	0.099
Performance	Air flow (H/M/L)	m³/h	600/530/470	630/560/500	800/720/650	920/800/720	1010/920/800	1500/1400/1300	1600/1500/1400
	Sound pressure level (H/M/L)	dB (A)	36/31/29	37/33/29	39/36/34	40/39/35	44/40/36	48/43/40	49/44/41
	Sound power level (H/M/L)	dB (A)	52/48/44	54/51/50	56/53/51	57/54/52	58/56/54	60/57/53	61/58/54
Installation	External dimensions (W/D/H)	mm	855/200/280	855/200/280	1115/243/336	1115/243/336	1115/243/336	1316/270/365	1316/270/365
	Shipping dimensions (W/D/H)	mm	954/279/355	954/279/355	1206/342/418	1206/342/418	1206/342/418	1403/384/463	1403/384/463
	Net/Shipping weight	kg	9.9/12	9.9/12	15.8/18.9	15.8/18.9	15.8/18.9	21.8/26.3	21.8/26.3
	Liquid pipe	mm	6.35	6.35	6.35	6.35	9.52	9.52	9.52
	Gas pipe	mm	9.52	12.7	12.7	12.7	15.88	15.88	15.88
	Drain hose	mm	16.8	16.8	16.8	16.8	16.8	16.8	16.8
Controller	Wired (O-Optional/S-Standard)	/	THW-SA201ABK	THW-SA201ABK	THW-SA201ABK	THW-SA201ABK	THW-SA201ABK	THW-SA201ABK	THW-SA201ABK
	Infrared (standard)	/	TYR-HRS01	TYR-HRS01	TYR-HRS01	TYR-HRS01	TYR-HRS01	TYR-HRS01	TYR-HRS01

Noter : 1. * Cooling conditioner : indoor 27°CDB / 19.5°CWB, Outdoor 35°CDB
 2. ** Cooling conditioner : indoor 27°CDB / 19 °CWB, Outdoor 35°CDB

DUCT HIGH ESP



THW-SA201ABK

DX AHU Connection Kit

MODEL	TAH1-280B	TAH1-560B
CAPACITY	14 ≤ x ≤ 28 kW	28 ≤ x ≤ 56 kW
		

- Flexible duct connection
- Variable static pressure
100-500 Pa setting
- Two speed fan (Optional)
- EEV Control



UNIT MODEL ֆ	R-410A	AVA075CC-CD2TB1	AVA100EC-CD2TB1	AVA125HC-CD2TB1	AVA150KC-CD2TB1	AVA180MC-CD2TB1	AVA200MC-CD2TB2	AVA250PC-CD2TB2	AVA300QC-CD2TB2	AVA360RC-CD2TB2	AVA400SC-CD2TB3	AVA450SC-CD2TB3	AVA500SC-CD2TB3	AVA600TC-CD2TB4
NOMINAL AIR FLOW ԼՍմ/ր	CFM	2,400	3,000	4,100	5,000	6,000	6,400	8,000	9,400	10,800	13,200	14,000	15,000	18,000
NOMINAL COOLING CAPACITY	BTU/HR	75,000	100,000	125,000	150,000	180,000	200,000	250,000	300,000	360,000	400,000	450,000	500,000	600,000
POWER SUPPLY	V/PH/Hz	380/3/50	380/3/50	380/3/50	380/3/50	380/3/50	380/3/50	380/3/50	380/3/50	380/3/50	380/3/50	380/3/50	380/3/50	380/3/50
POWER CONSUMPTION	kW	0.95	0.95	1.35	1.81	2.61	3.51	4.62	6.28	6.28	8.46	12.27	12.27	12.27
CAPACITY STEP	%	0-100	0-100	0-100	0-100	0-100	0-100	0-100	0-100	0-100	0-100	0-100	0-100	0-100
EXTERNAL STATIC PRESSURE	Pa	100	100	150	150	150	150	200	200	200	200	250	250	300
FAN TYPE		Forward curve centrifugal blower												
MATERIAL		Zinc coated steel												
DRIVE METHOD		Belt Drive												
QUANTITY		1	1	1	1	1	1	1	1	1	1	1	1	1
MOTOR TYPE		Squirrel cage induction												
NOMINAL POWER OUTPUT	kW	0.75	0.75	1.1	1.5	2.2	3	3	4	5.5	5.5	7.5	11	11
FULL LOAD AMP	A	1.89	1.89	2.67	3.53	4.96	6.59	6.59	8.67	11.5	11.5	15.3	22.2	22.2
QUANTITY		1	1	1	1	1	1	1	1	1	1	1	1	1
COIL TYPE		Aluminium corrugated fin & Seamless Copper Tube												
QUANTITY		1	1	1	1	1	1	1	1	1	1	1	1	1
FLOW CONTROL TYPE		Electronic expansion valve												
QUANTITY		2	2	2	2	2	2	2	2	2	2	2	2	2
CONNECTION TYPE		Brazed												
LIQUID	inch OD	3/8"	3/8"	1/2"	1/2"	1/2"	3/8" x 2	1/2" x 2	1/2" x 2	1/2" x 2	1/2" x 3	1/2" x 3	1/2" x 3	1/2" x 4
SUCTION	inch OD	7/8"	7/8"	1-1/8"	1-1/8"	1-1/8"	7/8" x 2	1-1/8" x 2	1-1/8" x 2	1-1/8" x 2	1-1/8" x 3	1-1/8" x 3	1-1/8" x 3	1-1/8" x 4
QUANTITY CIRCUIT REFRIGERANT		1	1	1	1	1	2	2	2	2	3	3	3	4
KITBOX		TAH1-280B	TAH1-280B	TAH1-560B	TAH1-560B	TAH1-560B	TAH1-280B	TAH1-560B	TAH1-560B	TAH1-560B	TAH1-560B	TAH1-560B	TAH1-560B	TAH1-560B
DRAIN	inch OD	1"	1"	1"	1"	1"	1"	1"	1"	1"	1"	1"	1"	1"
FILTER TYPE		Aluminium												
DIMENSION UNIT (WxDxH)	mm	1478x593x1145	1686x670x1249	1478x813x1585	1698x813x1585	1926x813x1585	1926x813x1585	1881x1058x2018	2176x1058x2018	2430x1058x2018	2510x1228x2258	2510x1228x2258	2510x1228x2258	2739x1378x2350
SHIPPING (WxDxH)	mm	1560x715x1295	1745x795x1400	1560x940x1750	1780x940x1750	1995x920x1750	1995x920x1750	1950x1165x2185	2250x1165x2185	2510x1165x2185	2580x1335x2425	2580x1335x2425	2580x1335x2425	2810x1485x2515
WEIGHT UNIT	Kg	124	146	170	183	216	219	349	380	412	473	481	688	738

DUCT HIGH ESP



THW-SA201ABK

DX AHU Connection Kit

MODEL	TAH1-280B	TAH1-560B
CAPACITY	14 ≤ x ≤ 28 kW	28 ≤ x ≤ 56 kW

- Flexible duct connection
- Variable static pressure
100-500 Pa setting
- Two speed fan (Optional)
- EEV Control



UNIT MODEL รุ่น	R-410A	AHA075DC-CD2TBE1	AHA100FC-CD2TBE1	AHA125HC-CD2TBE1	AHA150KC-CD2TBE1	AHA180MC-CD2TBE1	AHA200MC-CD2TBE2	AHA250PC-CD2TBE2	AHA3000C-CD2TBE2	AHA360RC-CD2TBE2	AHA4005C-CD2TBE3	AHA4505C-CD2TBE3	AHA5005C-CD2TBE3	AHA600TC-CD2TBE4
NOMINAL AIR FLOW ลิตร/วินาที	CFM	2,400	3,000	4,100	5,000	6,000	6,400	8,000	9,400	10,800	13,200	14,000	15,000	18,000
NOMINAL COOLING CAPACITY	BTU/HR	75,000	100,000	125,000	150,000	180,000	200,000	250,000	300,000	360,000	400,000	450,000	500,000	600,000
POWER SUPPLY	V/PH/Hz	380/3/50	380/3/50	380/3/50	380/3/50	380/3/50	380/3/50	380/3/50	380/3/50	380/3/50	380/3/50	380/3/50	380/3/50	380/3/50
POWER CONSUMPTION	kW	0.95	0.95	1.35	1.81	2.61	3.51	3.51	4.62	6.28	6.28	8.46	12.27	12.27
CAPACITY STEP	%	0-100	0-100	0-100	0-100	0-100	0-100	0-100	0-100	0-100	0-100	0-100	0-100	0-100
EXTERNAL STATIC PRESSURE	Pa	100	100	150	150	150	150	200	200	200	200	250	250	300
FAN	TYPE	Forward curve centrifugal blower												
	MATERIAL	Zinc coated steel												
	DRIVE METHOD	Belt Drive												
	QUANTITY	1	1	1	1	1	1	1	1	1	1	1	1	1
MOTOR	TYPE	Squirrel cage induction												
	NOMINAL POWER OUTPUT	kW	0.75	0.75	1.1	1.5	2.2	3	4	5.5	5.5	7.5	11	11
	FULL LOAD AMP	A	1.89	1.89	2.67	3.53	4.96	6.59	8.67	11.5	11.5	15.3	22.2	22.2
	QUANTITY	1	1	1	1	1	1	1	1	1	1	1	1	1
COIL	TYPE	Aluminium corrugated fin & Seamless Copper Tube												
	QUANTITY	1	1	1	1	1	1	1	1	1	1	1	1	1
FLOW CONTROL	TYPE	Electronic expansion valve												
	QUANTITY	2	2	2	2	2	2	2	2	2	2	2	2	2
CONNECTION	TYPE	Brazed												
	LIQUID	inch OD	3/8"	3/8"	1/2"	1/2"	1/2"	3/8" x 2	1/2" x 2	1/2" x 2	1/2" x 2	1/2" x 3	1/2" x 3	1/2" x 4
	SUCTION	inch OD	7/8"	7/8"	1-1/8"	1-1/8"	1-1/8"	7/8" x 2	1-1/8" x 2	1-1/8" x 2	1-1/8" x 2	1-1/8" x 3	1-1/8" x 3	1-1/8" x 4
	QUANTITY CIRCUIT REFRIGERANT		1	1	1	1	1	2	2	2	3	3	3	4
	KITBOX	TAH1-280B	TAH1-280B	TAH1-560B	TAH1-560B	TAH1-560B	TAH1-280B	TAH1-560B	TAH1-560B	TAH1-560B	TAH1-560B	TAH1-560B	TAH1-560B	TAH1-560B
	DRAIN	inch OD	1"	1"	1"	1"	1"	1"	1"	1"	1"	1"	1"	1"
FILTER	TYPE	Aluminium												
DIMENSION	UNIT (WxDxH)	mm	1466x985x555	1640x985x605	1431x985x860	1651x985x860	1879x985x910	1879x985x910	1810x1240x1290	2100x1240x1290	2347x1240x1290	2431x1520x1495	2431x1520x1495	2658x1740x1574.6
SHIPPING (WxDxH)	mm		1580x1075x755	1735x1075x805	1520x1075x1060	1740x1075x1060	1970x1075x1110	1970x1075x1110	1900x1335x1485	2195x1335x1485	2435x1955x1490	2520x1610x1695	2520x1610x1695	2750x1830x1774.6
WEIGHT	UNIT	Kg	112	130	158	171	198	205	335	366	399	459	467	722

DUCT FRESH AIR



OPTION



THW-SA201ABK



- Variable static pressure 100~200Pa setting
- Install with other indoor units together, and introduce the outdoor fresh air into indoor
- EXV Control



Model/Indoor unit			VFAH48V-AD2	VFAH72V-AD2	VFAH96V-AD2
Capacity	Cooling	kBtu/h	47.7	77.1	95.5
		kW	14	22.6	28
	Heating	Btu/h	34.1	51.8	60.8
		kW	10	15.2	17.8
Electrical Parameters	Power supply	Ph/V/Hz	1/220~230/50/60	1/220~230/50/60	1/220~230/50/60
Performance	Air flow (S/H/M/L)	m ³ /h	1900/1600/1460/1200	2800/2300/1800/1500	3200/2800/2400/2000
	Sound pressure level(H/M/L)	dB(A)	48/46/44/42	48/46/44/42	49/47/45/42
	Sound power level(H/M/L)	dB(A)	61/59/57/55	61/59/57/55	62/60/58/55
Installation	External dimensions(W/D/H)	mm	1500/700/248	1333/748/495	1333/748/495
	Shipping dimensions(W/D/H)	mm	1698/857/305	1558/896/668	1558/896/668
	Net/Shipping weight	kg	45.4/52.6	88/140	88/110
	Refrigerant liquid pipe	mm	9.52	9.52	9.52
	Refrigerant gas pipe	mm	15.88	25.4	25.4
	Static Pressure(Standard/Max.)	Pa	100/200	100/350	100/350
Controller	Wired (Optional)	/	THW-SA201ABK	THW-SA201ABK	THW-SA201ABK

HEAT RECLAIM VENTILATION



TW9301



Be controlled with other indoor units together



Heat recovery nearly efficient



Efficient heat recovery air processing




1000
m³/h
Max air flow




Model/Indoor unit			VHRV150-AD2	VHRV260-AD2	VHRV500-AD2	VHRV800-AD2	VHRV1000-AD2
Electrical	Power supply	Ph/V/Hz	1/220-240/50/60	1/220-240/50/60	1/220-240/50/60	1/220-240/50/60	1/220-240/50/60
	Rated power input	W	135	165	280	360	420
	Rated current	A	0.65	0.79	1.34	1.72	2.01
Enthalpy exchange effectiveness	Cooling condition		58%	57%	61%	68%	61%
	Heating condition		65%	65%	68%	72%	65%
Performance	Air flow (H/M/L)	m³/h	150/110/70	250/200/160	500/430/375	800/680/600	1000/810/730
	Sound pressure level (H/M/L)	dB(A)	38/35/30	40/38/35	45/42/40	48/46/43	50/48/45
	Sound power level (H/M/L)	dB(A)	48/45/40	50/48/45	55/52/50	58/58/53	60/58/55
Installation	External dimension (W/D/H)	mm	750/530/240	750/550/270	1000/710/270	1200/940/324	1250/935/350
	Shipping dimension (W/D/H)	mm	955/575/305	955/575/335	1205/755/335	1405/985/389	1455/980/415
	Net weight/shipping/ weight	Kg	26/28	30/32	40/42	55/59	56/60
	Static pressure	Pa	80	80	80	100	100
Controller	Wired (Standard)		TW9301	TW9301	TW9301	TW9301	TW9301


HEAT RECLAIM VENTILATION

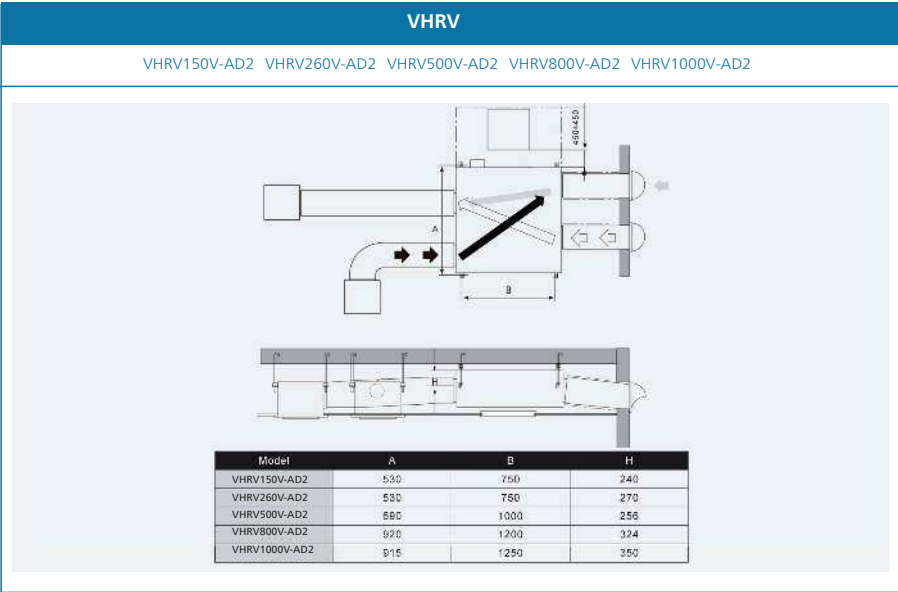

VHRV150V-AD2, VHRV260V-AD2

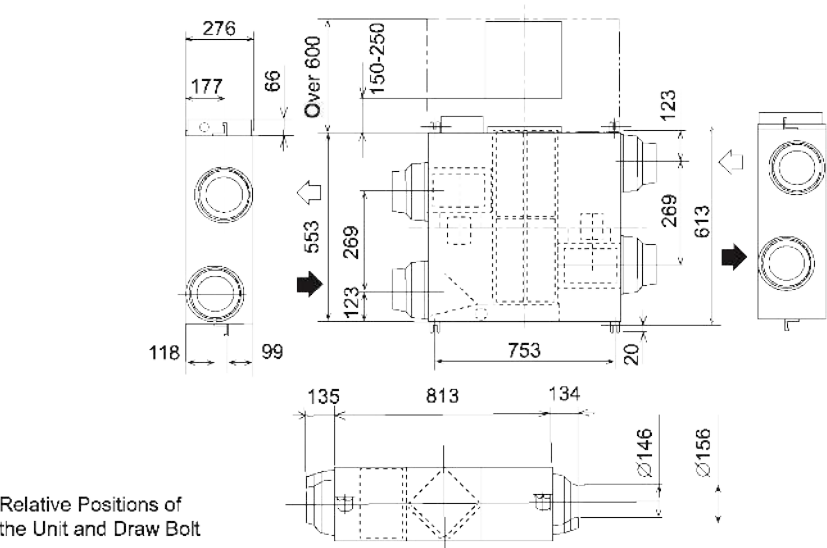


VHRV500V-AD2, VHRV800V-AD2, VHRV1000V-AD2

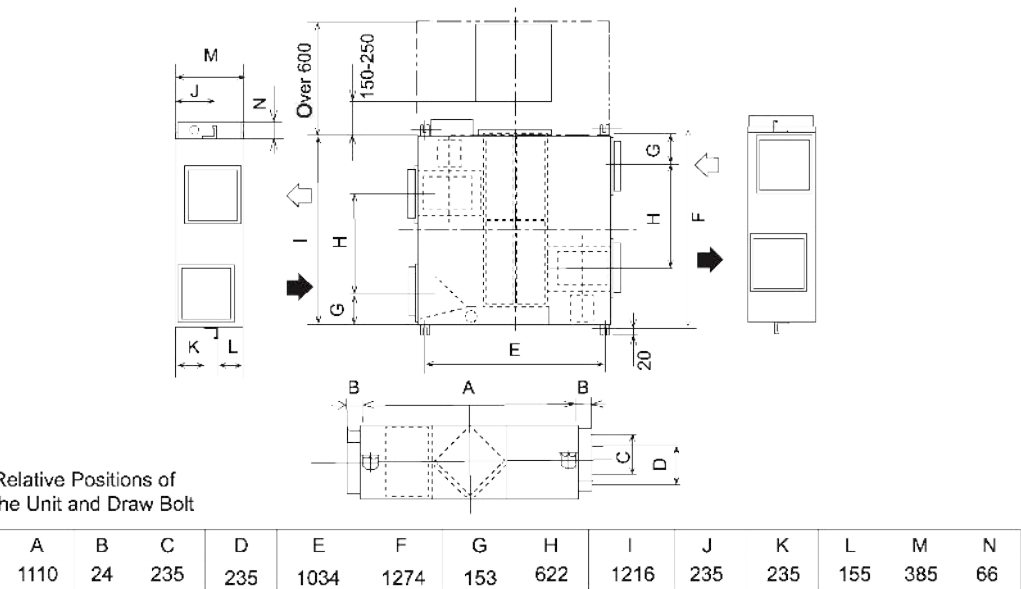

CONTROL SYSTEM



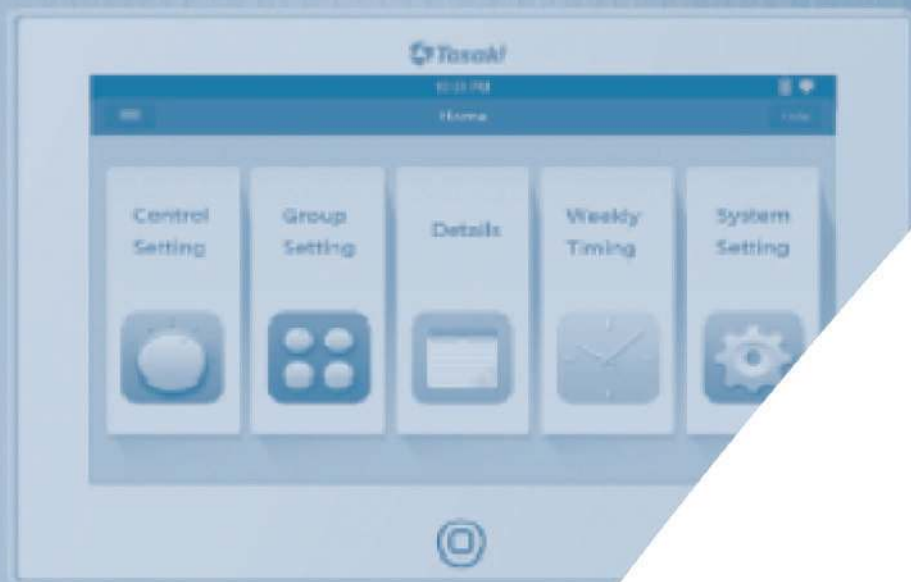

User Friendly Management Control Solution

Integrated Management

Convenient and efficient, Tasaki controllers realize the co-management of Super match and VRFH-5C in one system, providing you more combination choices for better managing large or middle-sized buildings.

Building Management

The excellent building management system provides a professional and reliable service for a better management of your air conditioning units.

Intelligent Management

"Tasaki Smart AC" provides an intelligent and personalized experience for your smart life.

Applications

Tasaki control products are designed to provide you a perfect solution for the small, medium or large commercial projects.

Wireless
Controller

Centralized
Controller

Wired
Controller

Centralized
Controller

BMS

Wifi
Control

Schedule 10:15 AM 10/26/14

DECK

56°F

ON 12:00 OFF 21:00

SW: 100% 100%

100% 100%

AIR-HEAT

62°F

ON 12:30 OFF 21:00

SW: 100% 100%

100% 100%

WATER

56°F

ON 12:30 OFF 21:00

SW: 100% 100%

100% 100%

MENU


41-Take S/W

18-100 S/W

All Done


Enter Screenshot

Setting_Detail						2016.11.23		10:41	10:50 PM
No.	User	IC	Instc.	Perf Special	Impress. limit	Load size limit	Running time	Emp.	
31	33051C1	PL-001	207	High	217	217	0:00:00	0	
32	33051C1	PL-002	207	High	217	217	0:00:00	0	
33	33051C1	PL-003	207	High	217	217	0:00:00	0	
34	33051C1	PL-004	207	High	217	217	0:00:00	0	
35	33051C1	PL-005	207	High	217	217	0:00:00	0	
36	33051C1	PL-006	207	High	217	217	0:00:00	0	
37	33051C1	PL-007	207	High	217	217	0:00:00	0	
38	33051C1	PL-008	207	High	217	217	0:00:00	0	
39	33051C1	PL-009	207	High	217	217	0:00:00	0	
40	33051C1	PL-010	207	High	217	217	0:00:00	0	

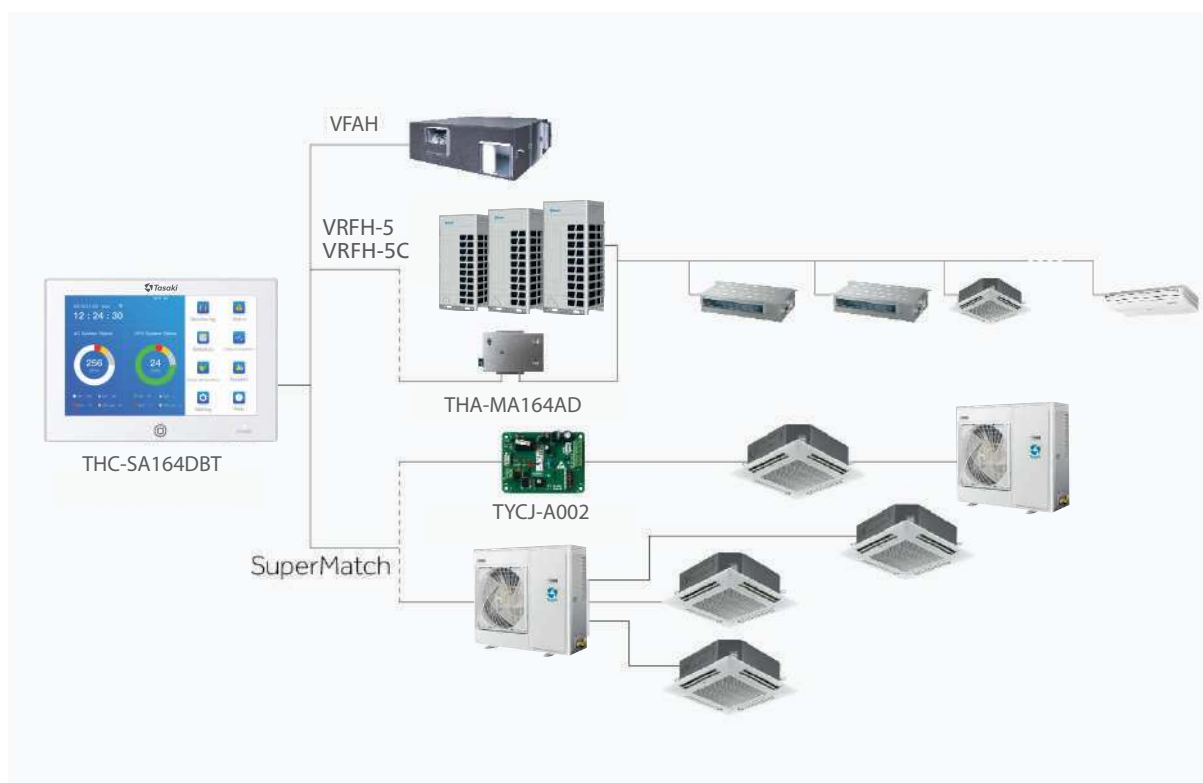

THC-LA1CDBT

- 12.5 inch TFT LCD touch screen
- Max.800 VRFH-5C indoor units and Max 128 LCAC IDUs connectable for one controller totally 928 IDUs connectable
- Floor plan layout view
- Web access and email alarm
- Weekly scheduled and special day setting
- Integrate 3rd party devices like fire alarm, lighting with Tasaki indoor units
- All VRFH-5C system requires the new gateway THA-MA1ADB (one system requires one gateway)
- LCAC products require PCB adapter TYCJ-A002 (one IDU requires one TYCJ-A002)
- Total electricity consumption display
- Data curve
- Electricity consumption distribution for tenant billing
- Multi language

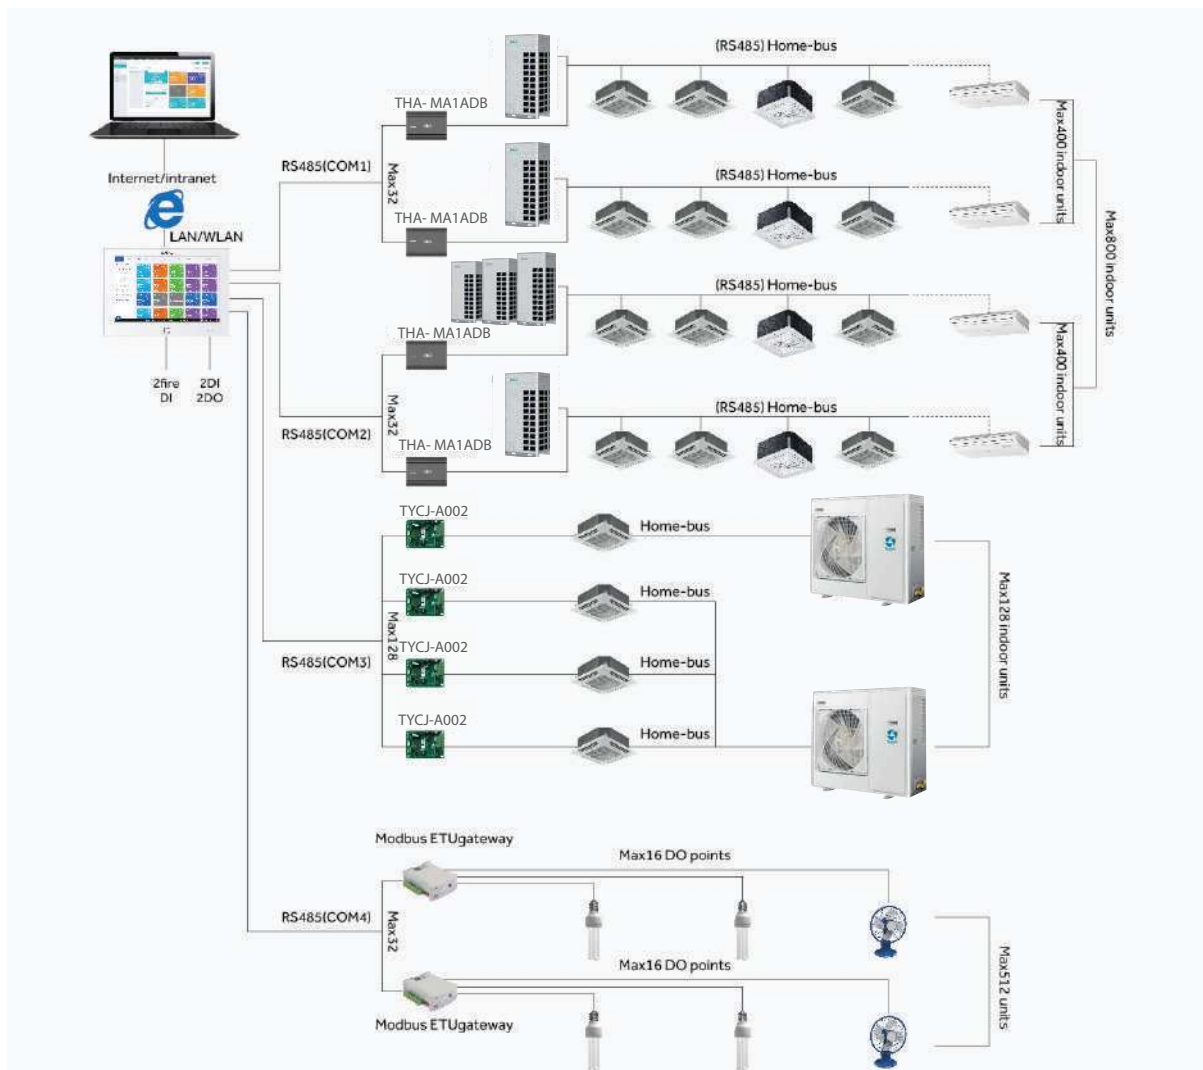

Star Products


TYCZ-A004 is a smart touch screen controller enabling remote management of up to 256 indoor units.

TYCZ-A004

- Individual control, Group control & Central control (Max 256 indoor units)
- 7-inch TFT LCD touch screen with back light
- Schedule control
- Daylight saving
- Control mode setting (LIFO, Central, Lock)
- User editable control logic
- Indoor units' information edit
- Error display
- Fire alarm terminal
- VFAH linkage control



TYCZ-A004 System

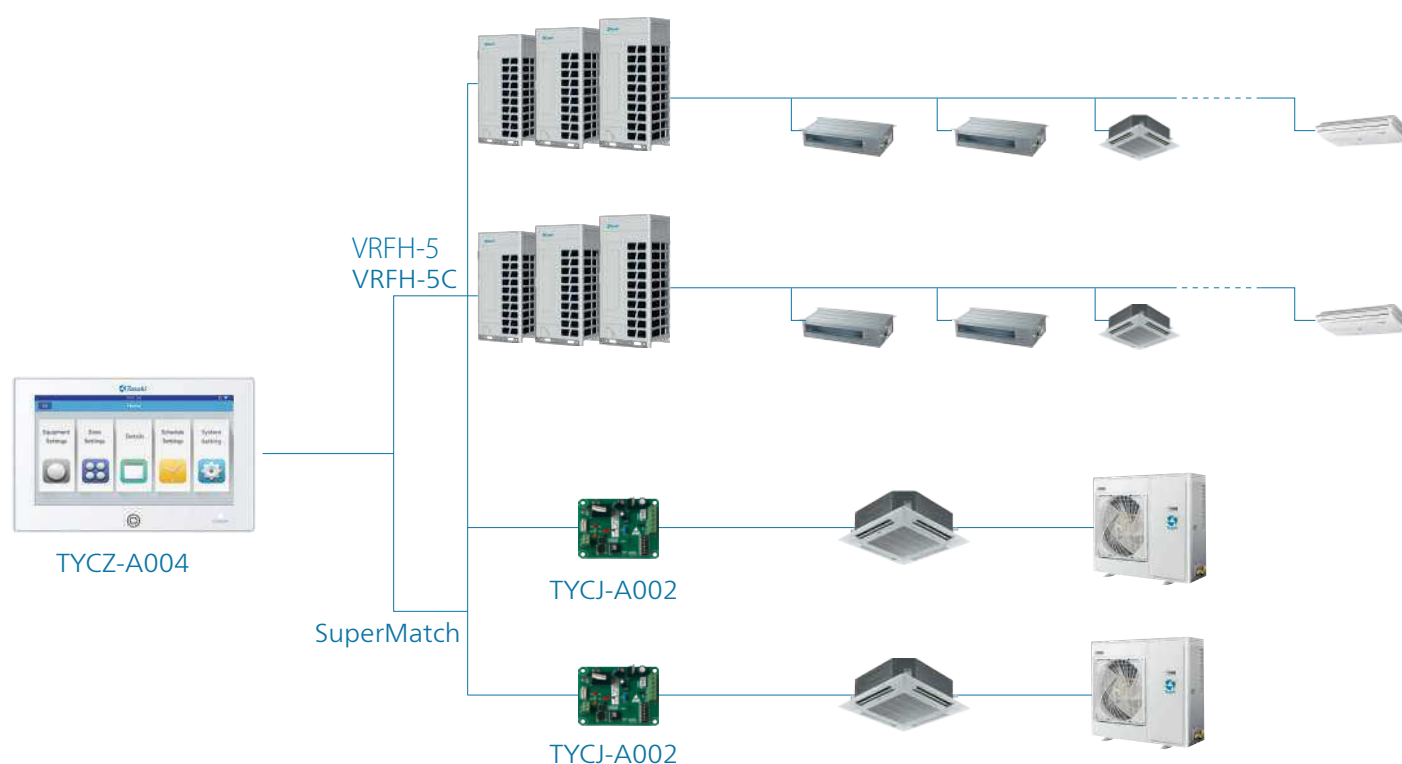


CONTROL SYSTEM



Control and Monitoring

- Control and monitoring up to 256 indoor units.
- Operation control: mode, temperature, fan, swing.
- All ON/OFF
- Icon based indoor units display

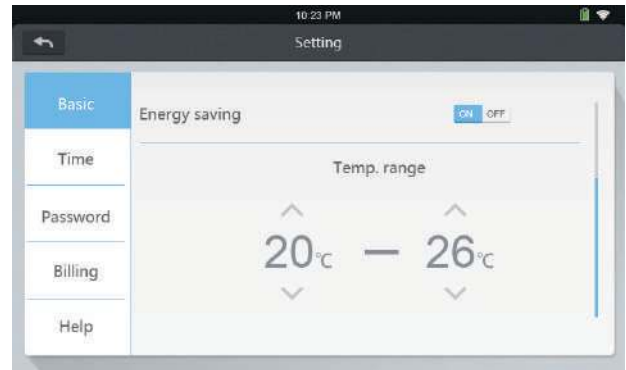

Energy Saving Function

- Operation mode lock
- Upper/lower temperature limit setting for different zones/ groups



Zone Management

- Zoning control the indoor units according to user's demands.
- Zone control: zone creation, edition, deletion




Schedule Control

- Weekly/ Daily schedule control without setting number limitation.
- Free combination
- Schedule edit (add, edit, delete)
- Detailed operation setting



Cycle Monitoring

- Monitoring indoor unit running status

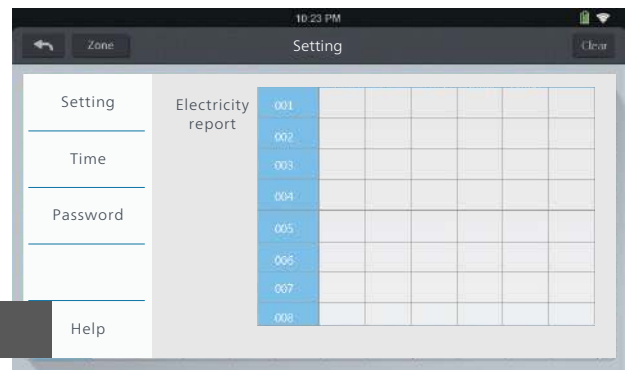

Power Distribution & Report

- Data query
- Electricity report download


BMS

THCM-03


- Remote monitoring version; Third party interface: BACnet ip/ Modbus ip/ Modbus rtu
- Max. 1000 indoor units can be controlled
- Max. 4 groups. Each group can connect 20 systems.
- Each system requires one THA-MA.
- Operation status setting & monitoring.
- Schedule setting (weekly, monthly)
- Multi user management with different authorized levels
- Operation and Error history log



THCM-03 System

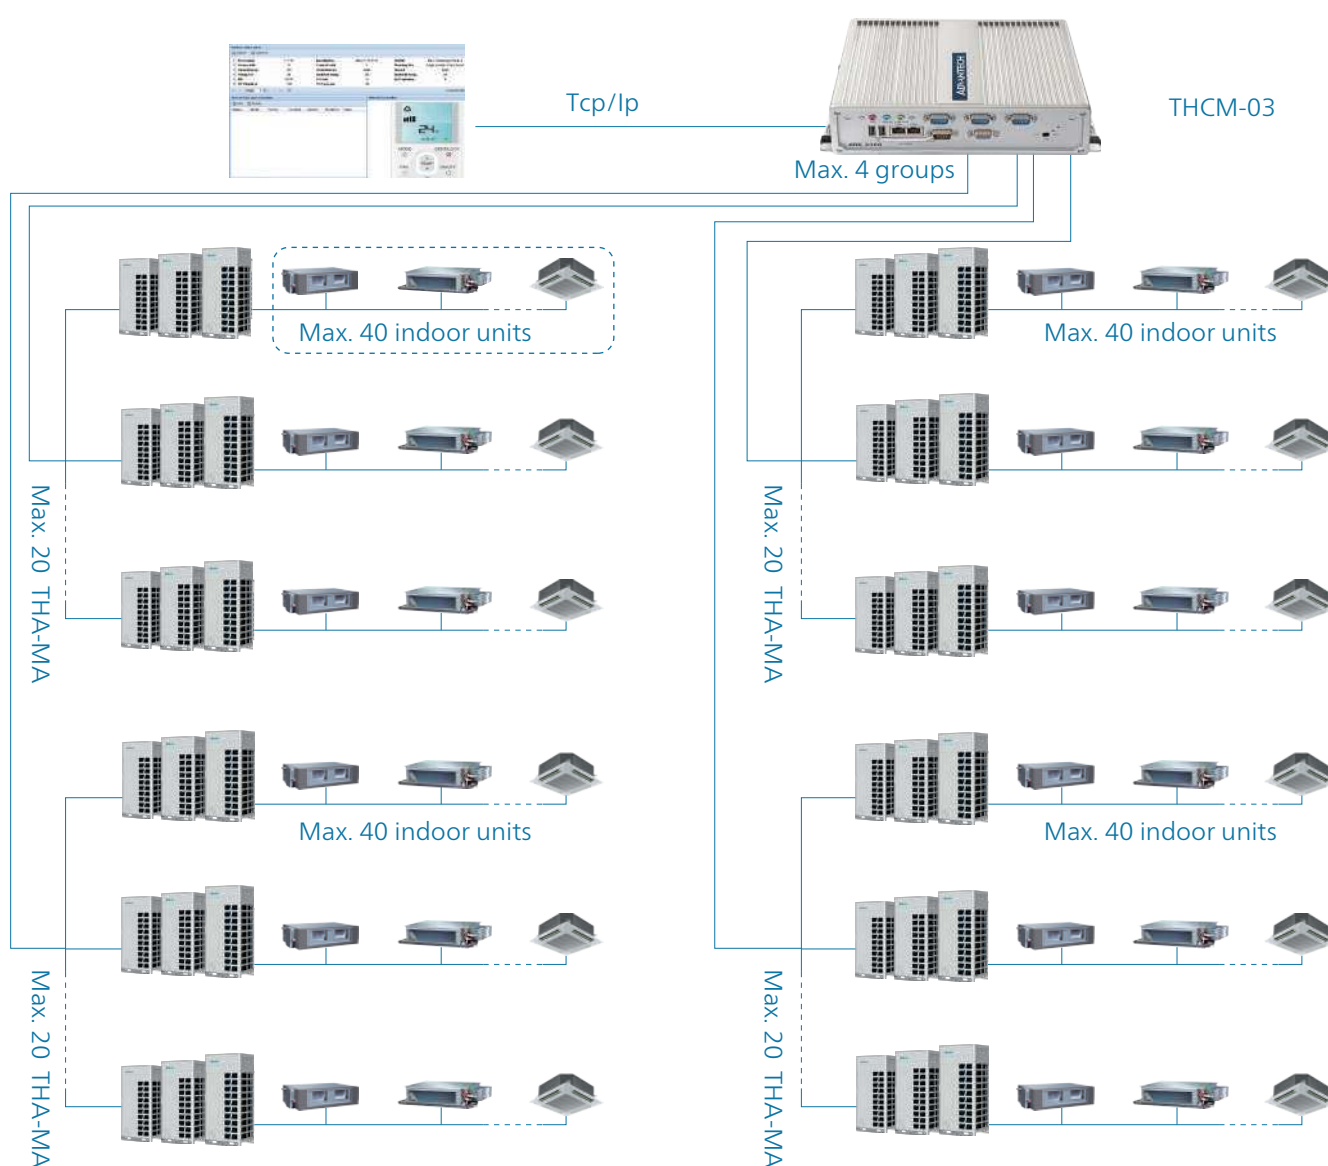

Cloud Service Platform

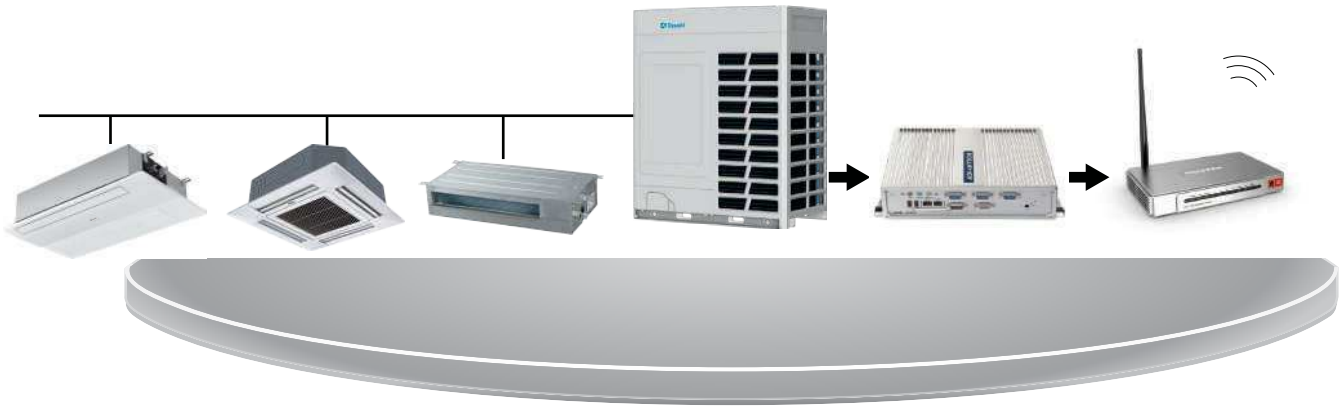

- 7*24 on-line service
- Intelligent service: failure remind, maintenance mind information
- Energy saving: real-time data saving, provide energy saving solution according to data analysis



Controllers Match Table for VRFH-5, VRFH-5C Indoor Units

Outlook	Series	Model	 TYR-HRS01	 TYR-HQS01	 THW-SA201ABK	 THW-SA301AFK	 TW9301
	4 Way Cassette	FCRH**V-AD2	▲	▲	▲		
	One-way Cassette	FC1H**V-AD2	▲	▲	▲		
	2 Way Cassette	FC2H**V-AD2		▲			
	Convertible	FUH**V-AD2	▲	▲	▲		
	Duct Slim Low ESP (AC) (0/30Pa)	FIHS**V-AD1	▲		▲		
	Duct Medium ESP (50/100 Pa)	FDMH**V-AD3	▲		▲		
	Duct High ESP (100/196 Pa)	FDHH**V-AD2	▲		▲		
	Duct High ESP (0/200 Pa)	FDHH**V-AD2	▲		▲		
	Duct High ESP (300/500 Pa)	FDHH**V-AD2	▲				
	High Wall	FWH**2-AD2	▲	▲	▲		
	Duct Fresh Air	VFAH**V-AD2			▲		
	Heat Reclaim Ventilation	VHRV***-AD2					▲

DX AHU Connection Kit

MODEL	TAH1-280B	TAH1-560B	TAH1-703B
CAPACITY	14 ≤ x ≤ 28 kW	28 ≤ x ≤ 56 kW	56 ≤ x ≤ 73 kW
			

▲ Controllers can match with the indoor unit

Accessories

Name	Design	Model	Functions	For what unit
Gather pipe		THZG-20B	Refrigerant gathering	VRFH-5C, 2 outdoor units
Gather pipe		THZG-30B	Refrigerant gathering	VRFH-5C, 3 outdoor units
Manifold pipe		TFQG-B335A	Refrigerant distribution	Total indoor units capacity less than 33,500W.
Manifold pipe		TFQG-B506A	Refrigerant distribution	Total indoor units capacity less than 50,600W, but equal or bigger than 33,500W.
Manifold pipe		TFQG-B730A	Refrigerant distribution	Total indoor units capacity less than 73,000W, but equal or bigger than 50,600W.
Manifold pipe		TFQG-B1350A	Refrigerant distribution	Total indoor units capacity less than 13500W, but equal or bigger than 73000W.
Manifold pipe		TFQG-B2040A	Refrigerant distribution	Total indoor units capacity >135,000W.

Before installation

- 1) Before installation, check if the model, power supply, pipe, wires and parts purchased respectively are correct.
- 2) Check if the indoors and outdoors can be combined as the following.

HP	Capacity (W)	Combination type	Indoor			Gather pipe
			Allow the mo□ connected indoor units	The mo□ recommended indoor unit number	Total indoor capacity (HP)	
8	25200	Single	13	8	4~10.4	-
10	28000	Single	16	10	5~13	-
12	33500	Single	20	11	6~15.6	-
14	40000	Single	24	13	7~18.2	-
16	45000	Single	27	15	8~20.8	-
18	50400	Single	30	17	9~23.4	-
20	56000	Single	33	18	10~26	-
22	61500	Single	36	20	11~28.6	-
24	68000	Single	40	22	12~31.2	-
26	73500	Single	43	24	13~33.8	-
28	80000	Combination(14+14)	47	26	14~36.4	THZG-20B
30	85000	Combination(14+16)	50	28	15~39	
32	90000	Combination(16+16)	53	30	16~41.6	
34	95400	Combination(16+18)	56	31	17~44.2	
36	100800	Combination(18+18)	59	33	18~46.8	
38	106400	Combination(18+20)	63	35	19~49.4	
40	112000	Combination(20+20)	64	37	20~52	
42	117500	Combination(20+22)	64	39	21~54.6	
44	123000	Combination(22+22)	64	39	22~57.2	
46	129500	Combination(22+24)	64	39	23~59.8	
48	136000	Combination(24+24)	64	39	24~62.4	
50	141500	Combination(24+26)	64	39	25~65	
52	147000	Combination(26+26)	64	39	26~67.6	
54	151200	Combination(18+18+18)	64	39	27~70.2	THZG-30B
56	156800	Combination(18+18+20)	64	41	28~72.8	

HP	Capacity (W)	Combination type	Indoor			Gather pipe
			Allow the mo□ connected indoor units	The mo□ recommended indoor unit number	Total indoor capacity (HP)	
58	162400	Combination(18+20+20)	64	41	29~75.4	THZG-30B
60	168000	Combination(20+20+20)	64	41	30~78	
62	173500	Combination(20+20+22)	64	41	31~80.6	
64	179000	Combination(20+22+22)	64	41	32~83.2	
66	184500	Combination(22+22+22)	64	41	33~85.8	
68	191000	Combination(22+22+24)	64	45	34~88.4	
70	197500	Combination(22+24+24)	64	45	35~91	
72	204000	Combination(24+24+24)	64	45	36~93.6	
74	209500	Combination(24+24+26)	64	45	37~96.2	
76	215000	Combination(24+26+26)	64	45	38~98.8	
78	220500	Combination(26+26+26)	64	49	39~101.4	
80	224000	Combination(20+20+20+20)	64	49	40~104	THZG-30B FQG-B2040A
82	229500	Combination(20+20+20+22)	64	49	41~106.6	
84	235000	Combination(20+20+22+22)	64	49	42~109.2	
86	240500	Combination(20+22+22+22)	64	49	43~111.8	
88	246000	Combination(22+22+22+22)	64	49	44~114.4	
90	252500	Combination(22+22+22+24)	64	54	45~117	
92	259000	Combination(22+22+24+24)	64	54	46~119.6	
94	265500	Combination(22+24+24+24)	64	54	47~122.2	
96	272000	Combination(24+24+24+24)	64	54	48~124.8	
98	277500	Combination(24+24+24+26)	64	54	49~127.4	
100	283000	Combination(24+24+26+26)	64	54	50~130	
102	288500	Combination(24+26+26+26)	64	57	51~132.6	
104	294000	Combination(26+26+26+26)	64	57	52~135.2	

Note:

- If all the indoor units operate at the same time in one system, the total indoor units capacity should be less than or equal to the total outdoor units capacity. Otherwise, overloading operations may occur in bad operating condition or some special conditions. If all the indoor units don't operate at the same time in one system, the total indoor units capacity should be no more than 130% of the total outdoor units capacity
- If the system operates in high heat load or cold area (Ambient Temperature below -10°C), the total indoor units capacity should be less than the total outdoor units capacity.
- To choose combinations' wires and air switches according to the Max. operating current of the combinations.



THA-SB101DB

- Infrared signal receiver
- Duct type indoor unit remote control
- Model selection based on duct type indoor unit



TYR-HQS01

- On/Off, Mode, Fan speed, Temperature setting, Swing
- Individual control
- Five grades fan speed reserved
- Individual blade control for Round-way Cassette
- Clock & Timer



TYR-HRS01

- On/Off, Mode, Fan speed, Temperature setting, Swing
- Individual control
- Timer
- Clock



THW-201ABK

- On/Off, Mode, Fan speed, Temperature setting, Swing.
- Individual & Group control (Max 16 indoor units)
- Simple and Smart design, 86*86*13.05mm
- Touch button with back light
- Timer /Clock
- Individual blade control for Round-way Cassette
- Easy installation, user friendly




THW-SA301AFK

- On/off, set point temperature adjustment, fan speed selection, operation mode selection.
- Individual control: one controller per indoor unit.
- Group control: Max. 16 indoor units as one group.
- Electric heater
- Main-Sub control, VIP
- Individual flap adjustment. (For round way cassette units)
- Built-in infrared signal receiver, which allows the duct units with this wired controller to use the infrared controller directly.
- Low-Temp. Dehumidification. (For the units supporting low-temp. dehumidification function only).
- Self-cleaning function. (For the units supporting self-cleaning function only).
- Energy saving (ECO), default parameters are 23°C (the lowest temp. limit of cooling and dry mode); and 26°C (the highest temp. limit of heating mode)
- Compatible with AC protocol & the new 1192 protocol, suitable for more indoor units.



Centralized Controller


The centralized control system offers you a smart and convenient experience while managing your air conditioner individually or by groups or by zones. A variety of controllers can be used to perfect your air conditioning management.

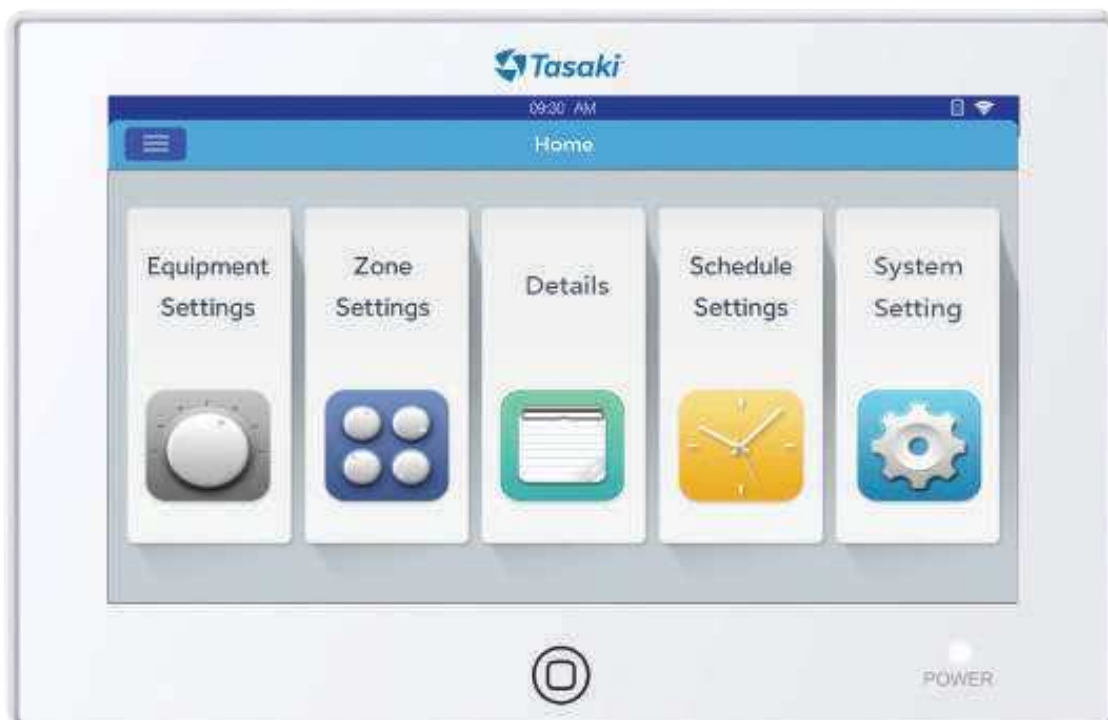

TYCZ-A004

TYCZ-A004

- Individual control, Group control & Central control (Max 256 indoor units)
- 7-inch TFT LCD touch screen with back light
- Schedule control
- Indoor units' information edit
- * Must be used in combination with a THA-MA for each VRFH-5C system.
(Max. 32 sets)

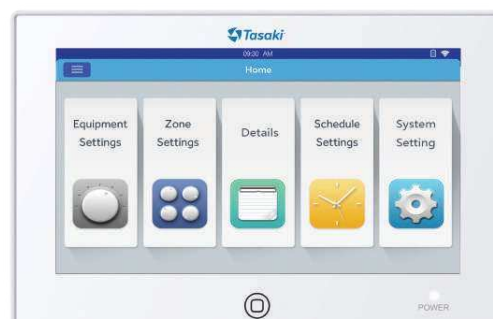

BMS

The building management modules could perfectly integrate air conditioners into the Building Management System, providing an excellent solution for large commercial areas.



The background of the entire page is a solid dark blue. Overlaid on this are several large, abstract, organic shapes in a lighter shade of blue. These shapes are irregular polygons with rounded corners and edges, creating a layered, geometric effect. One large shape is in the upper left, another in the center, and a third in the lower right.

VRF JOB

References

VRF Job References

Lamphun Klaimor Hospital, Thailand

- VRF 1,000 Tons

Prince of Songkla University, Pattani Campus, Thailand

- VRF 700 Tons

Wyndham Grand Nai Harn Beach Phuket Hotel, Thailand

- VRF 531 Tons

Princess of Naradhiwas University Thailand

- VRF 454 Tons

Tiger Distribution & Logistics Co.,Ltd., Thailand

- VRF 380 Tons

Mingalar Hospital, Mandalay Myanmar

- VRF 1,100 Tons

American International School, Phnom Penh, Cambodia.

- VRF 155 Tons

Prince of Songkla University, Thailand

- VRF 1,760 Tons



บริษัท ไทย ทาซากิ เอ็นจิเนียริง จำกัด

89/55 หมู่20 ถนนเทพารักษ์ ตำบลบางพลีใหญ่
อำเภอบางพลี จังหวัดสมุทรปราการ 10540

โทรศัพท์ **0-2312-3995**

อีเมล : info@tasaki.co.th

W : tasaki.co.th / LINE OA : @tasakiair / FB : tasakiair

Rev03 15.05.2026