

260PR

H.P. RADIAL PISTON PUMP

1/4″ UP TO 828 BAR 12,000 PSI




Mild st ure radial piston pump to 12,000 psi, for mineral oil.

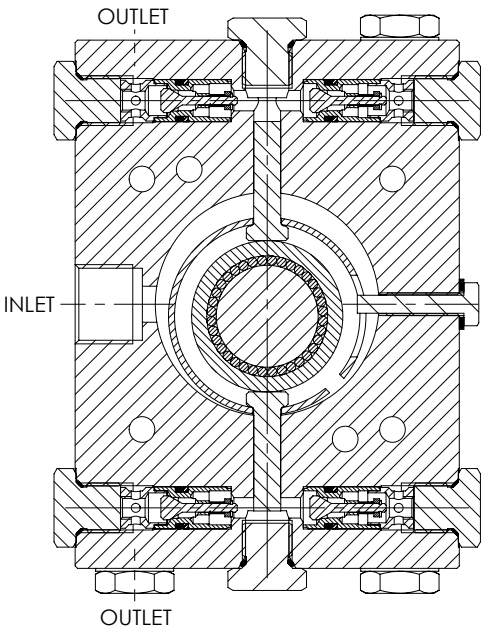

Externally Exposed Parts: Mild steel (EN1A / 220M07).
Primarily for mineral oil. Limited use on water glycols — consult factory.

Specifications

BASIC MODEL NUMBER	260PR
SYMBOL	
MAX WORKING PRESSURE	828 bar (12,000 psi)
MAX OUTLET PORT PRESSURE	828 bar (12,000 psi) Note: Any outlet port pressure is directly additive to the set pressure
ORIFICE SIZE	n/a
FLUID	Mineral oil See materials section
TEMPERATURE RANGE	See Product Selector opposite and Technical Data section
PORT SIZE	1/4″
WEIGHT	9 kg (19.8 lb)

Specifications may change without notice


Materials


Externally Exposed Parts: Mild steel (EN1A / 220M07).
Primarily for mineral oil. Limited use on water glycols — consult factory.

⚠ The standard valve has Viton® seals. Further seal options are available via the Product Selector. Compatibility with the working fluid at the operating temperature must be considered.

Typical Performance

Installation Diagram

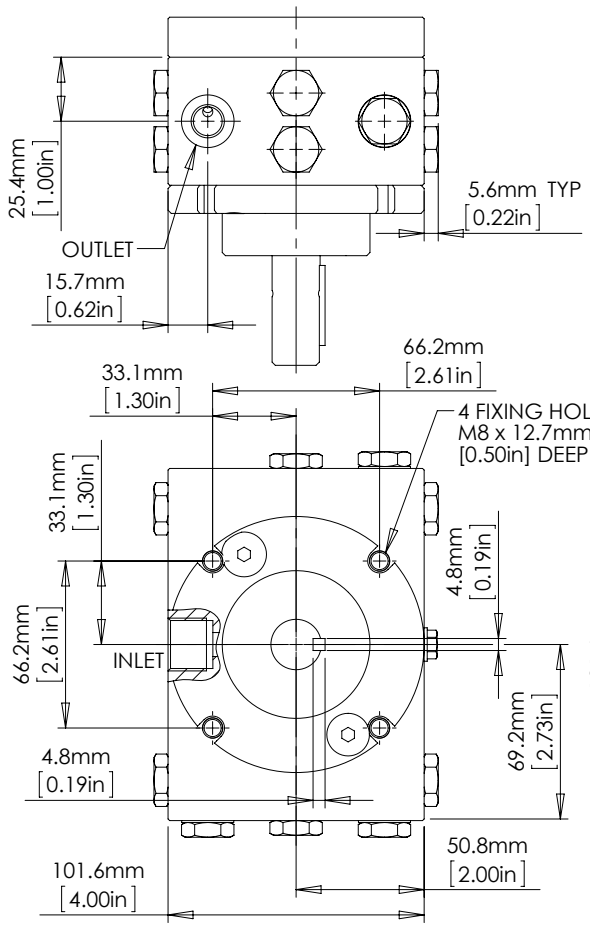

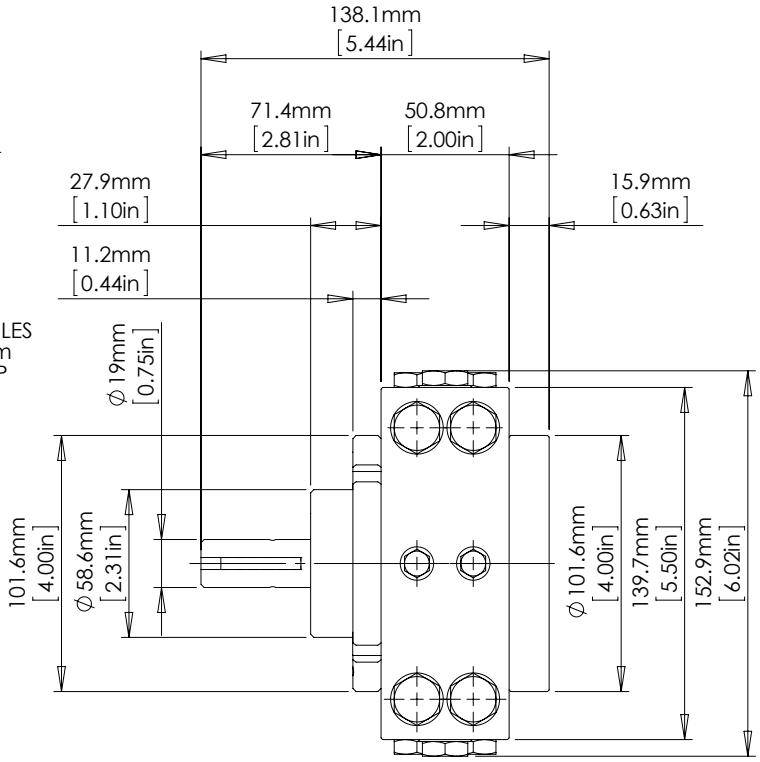

Product Selector

260PR-12K

VALVE TYPE	PORTING OPTIONS	VALVE OPTIONS	SEAL OPTIONS	SET PRESSURE RANGE
260PR	? Suction 1/2" BSP Discharge 1/4" BSP	Leave blank if not required ? Not applicable This option is not recommended for set pressures below 2 bar	Leave blank for Viton® seals -10˚c to +120˚c ? EPDM seals -45˚c to +150˚c Further seal options are available on request	12K 828 bar (12,000 psi)

Repair and seal kits are available on request

For a seal kit add SK at the end of the model code and for a repair kit add RK