

2XPC50

DUAL PO CHECK VALVE

1/2" UP TO 414 BAR 6,000 PSI




The 2XPC50 is a 1/2" nominal bore dual pilot operated check valve. The valve is ideally suited to cylinder applications, where it will allow the cylinder to move when instructed by the directional control valve, but will hold the cylinder in position when the directional control valve is returned to the centre position.

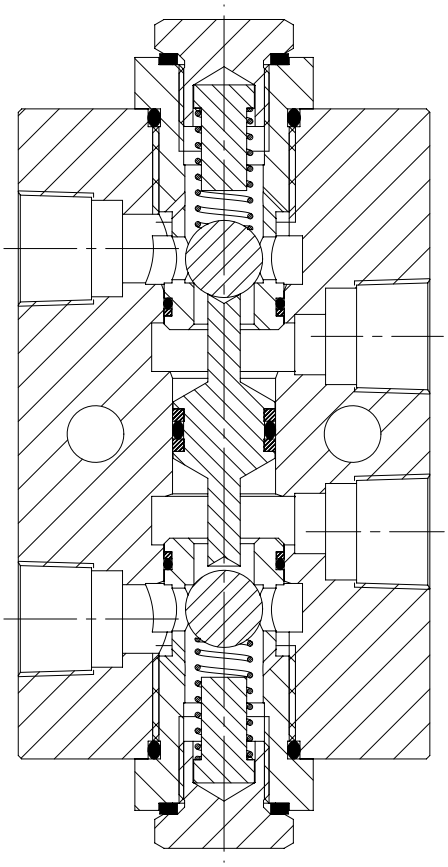

- Stainless Steel Construction
- Suitable for liquid use only
- Cetop 5 manifold mount version available
- Version available for subsea use
- Full cartridge version available (two check elements & one pilot piston)
- Version available for use with seawater as the operating media
- Version available with 3/8" ports
- Hard seated design
- Various seal options available
- Various porting options available

Specifications

BASIC MODEL NUMBER	2XPC50
SYMBOL	
MAX WORKING PRESSURE	414 bar (6,000 psi)
CV (FLOW CAPACITY)	1.9
PILOT RATIO	2.9:1
FLUID	Liquids See materials section
TEMPERATURE RANGE	See Product Selector opposite and Technical Data section
PORT SIZE	1/2"
WEIGHT	2.77 kg (6.1 lb)

Specifications may change without notice

Materials


Externally Exposed Parts: 316 Stainless Steel

Internally Wetted Parts: 316, 440C and 302 Stainless Steel and Acetal

The standard valve is designed for use with mineral oil and water glycols, and may also be used with a wide variety of media compatible with the materials of construction.


⚠ The standard valve has Viton® seals. Further seal options are available via the Product Selector. Compatibility with the working fluid at the operating temperature must be considered.


Typical Performance

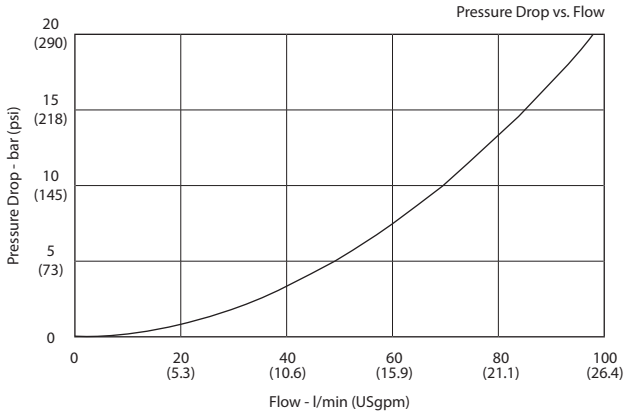

Typical performance based on water

Configuration Diagram



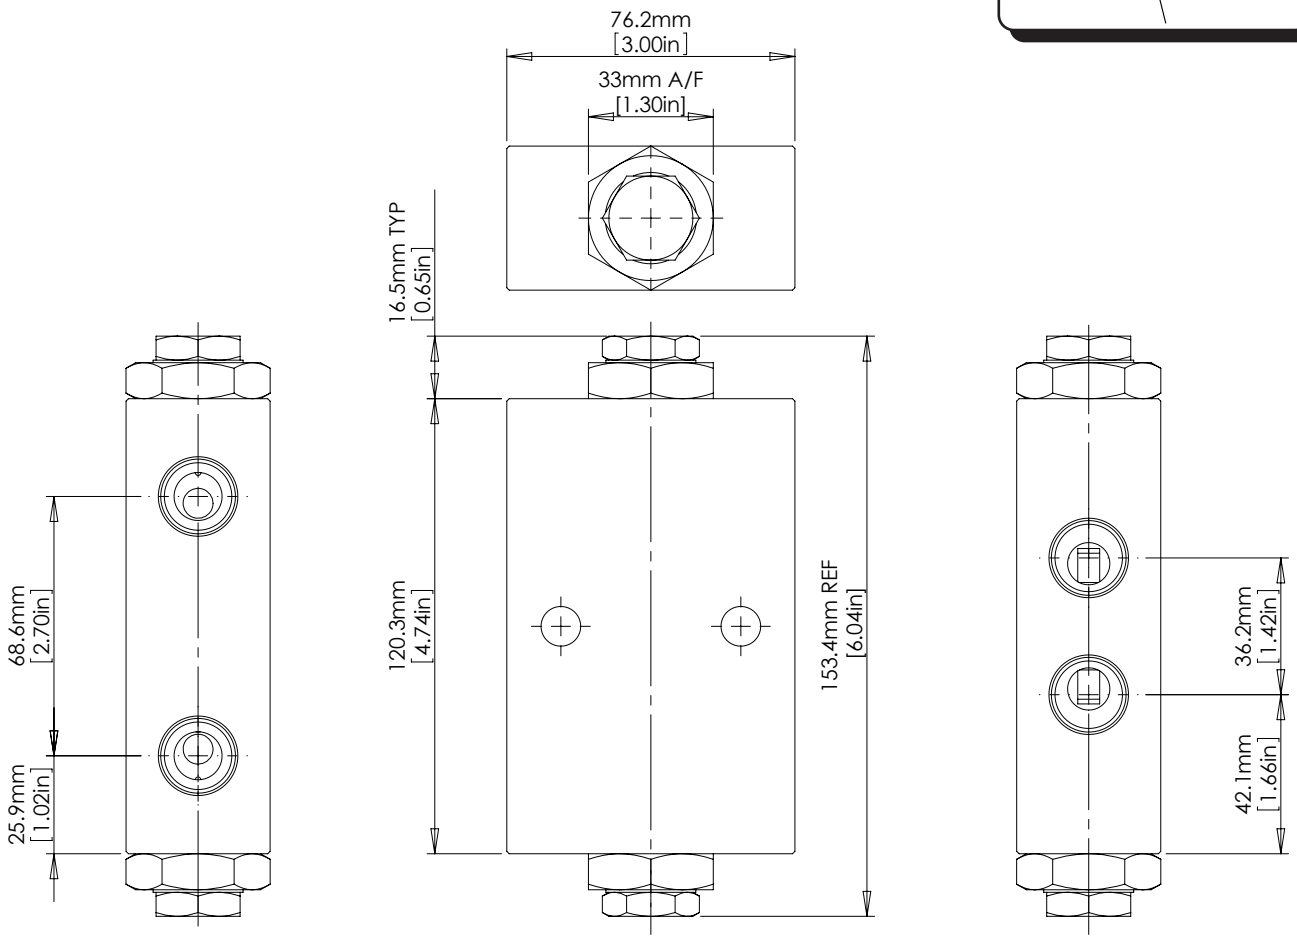

Product Selector

2XPC50 P - SW - NBR - 6K

VALVE TYPE	PORTING OPTIONS	VALVE OPTIONS	SEAL OPTIONS	MAX WORKING PRESSURE
2XPC50	P 1/2" BSPP female	Leave blank if not required	Leave blank for Viton® seals -10˚c to +120˚c	6K 414 bar (6,000 psi) Liquid
	N 1/2" NPT female	SW Suitable for subsea use	NBR Nitrile seals -30˚c to +105˚c	
	50/37P 3/8" BSPP female	SWD Materials compatible with seawater	HNBR Hydrogenated Nitrile -20˚c to +120˚c	
	50/37N 3/8" NPT female		KLZ Kalrez® seals -25˚c to +200˚c	
	56AE 9/16" UNF (3/8" medium press OD tube)		Further seal options are available on request	
	C5 CETOP5 Manifold mount			
	C 2 x catridge checks and 1 x pilot piston (no body)			

Repair and seal kits are available on request

For a seal kit add SK at the end of the model code and for a repair kit add RK

2XPC50

DUAL PILOT OPERATED CHECK VALVE



