
3SV25

PRESSURE SENSING VALVE


1/4" UP TO 414 BAR 6,000 PSI




The 3SV25 is a 2 position 3 way pressure sensing valve. It is used to switch a low pressure supply when triggered by a pressure change in a high pressure sensed line.

The valve may be adjusted to operate at a specific set pressure, and can be used in normally closed or normally open mode to switch the low pressure signal on or off. If used for pressure limiting applications, the valve is not to be used as a "safety accessory" as defined by the Pressure Equipment Directive 97/23/EC.

- 2 position 3 way valve, controlled by sensing port pressure
- Senses rising and falling pressures up to 414 bar (6,000 psi)
- Ideal for controlling a pneumatic signal from a high pressure liquid or gas line
- Available preset or may be set using external adjustment
- Block-before-bleed closed transition when switching
- Built-in hysteresis to provide automatic return to the default position. See typical performance graph
- Suitable for use with mineral oils and water glycols, sea water, air, nitrogen and sweet natural gas
- Contact us for advice regarding higher sensing pressures, differential sensing pressures, and detented operation

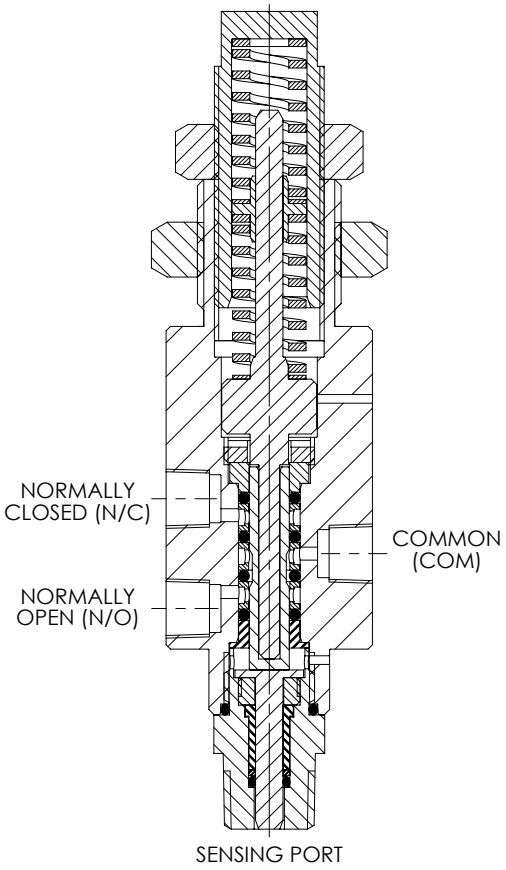

Specifications

BASIC MODEL NUMBER	3SV25
SYMBOL	
MAX SENSING PORT PRESSURE	414 bar (6,000 psi)
MAX SERVICE PORT PRESSURE	15.5 bar (225 psi)
SERVICE LINE CV (FLOW CAPACITY)	0.15 (Fully switched)
FLUID	Liquids and Gases See materials section
TEMPERATURE RANGE	See Product Selector opposite and Technical Data section
SERVICE PORT SIZE	1/4" NPT Female See Product Selector opposite for sensing port size
WEIGHT	1.4 kg (3.1 lb)

Specifications may change without notice

Materials


Externally Exposed Parts: 316 stainless steel and brass, with an electroless nickel plated carbon steel spring.

Internally Wetted Parts: 316 stainless steel.

The standard valve is designed for use with air, nitrogen, sweet natural gas, mineral oil, water glycols, plain water and sea water. Contact us for advice when use with other media is required.


⚠ The standard valve has Viton® seals. Further seal options are available via the Product Selector. Compatibility with the working fluid at the operating temperature must be considered.


Typical Performance

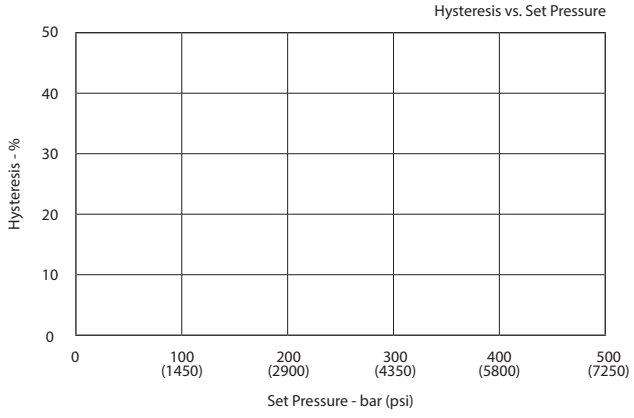

Typical performance based on sensing water

Installation Diagram



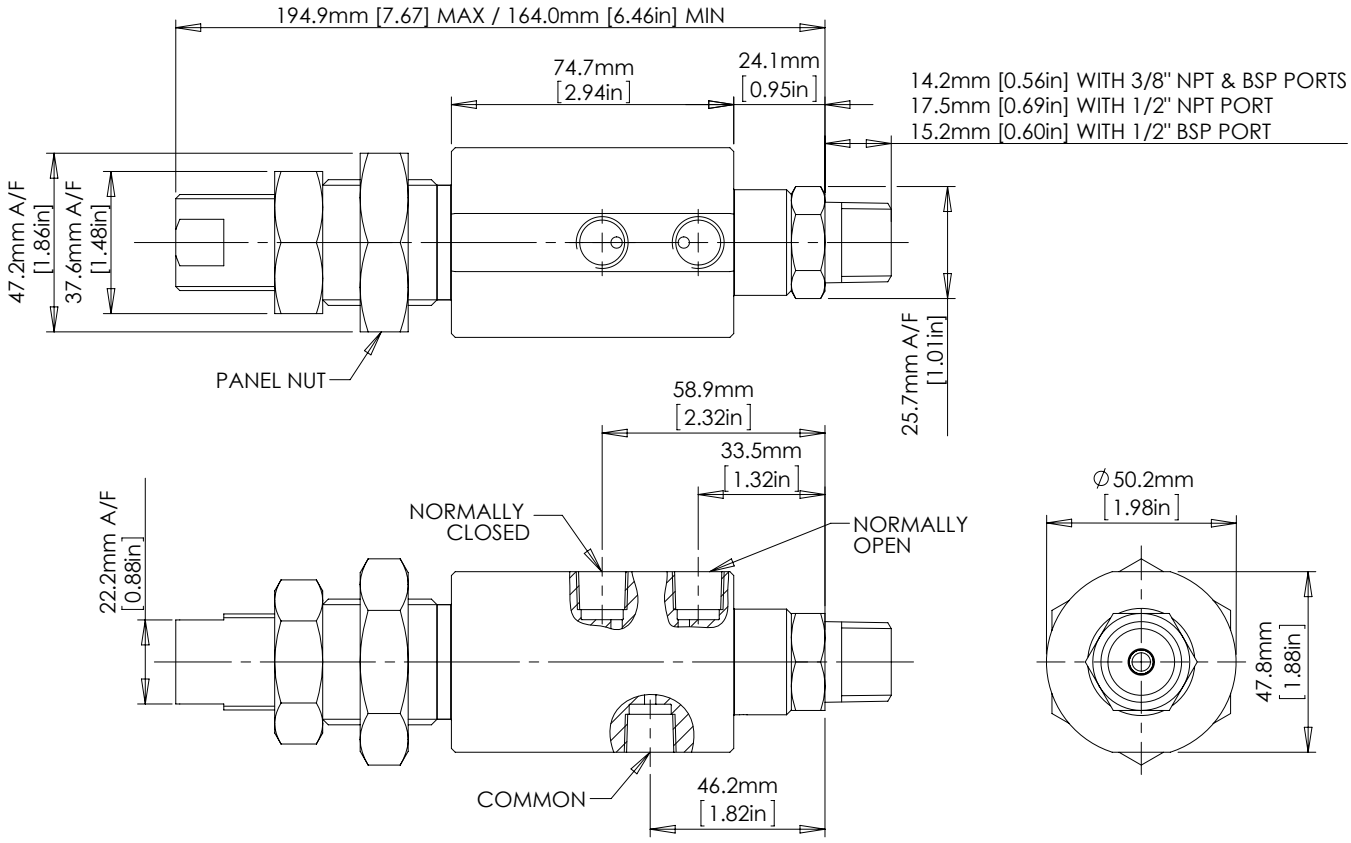

Product Selector

3SV25 /37P - NBR - 1K

VALVE TYPE	SENSING PORT OPTIONS	SEAL OPTIONS	SENSING PRESSURE RANGE
3SV25	/37P 3/8" BSPP male	Leave blank for Viton® seals -10˚C to +120˚C	1K 70 - 69 bar (100 - 1,000 psi)
	/37N 3/8" NPT male	NBR Nitrile seals -20˚C to +105˚C	3K 62 - 207 bar (900 - 3,000 psi)
	/50P 1/2" BSPP male	EP EPDM seals -20˚C to +120˚C	6K 193 - 414 bar (2,800 - 6,000 psi)
	/50N 1/2" NPT male	KLZ Kalrez® seals -20˚C to +120˚C	Contact us for advice if using the 6k version for sensing the pressure of a gas
Repair and seal kits are available on request For a seal kit add SK at the end of the model code and for a repair kit add RK		HNBR Hydrogenated Nitrile seals -20˚C to +120˚C	Advise us of set pressure and if setting is rising or falling if factory pre-setting is required
		Further seal options are available on request	