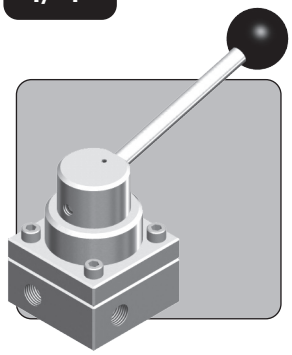
4R25

ROTARY CONTROL VALVE

1/4"

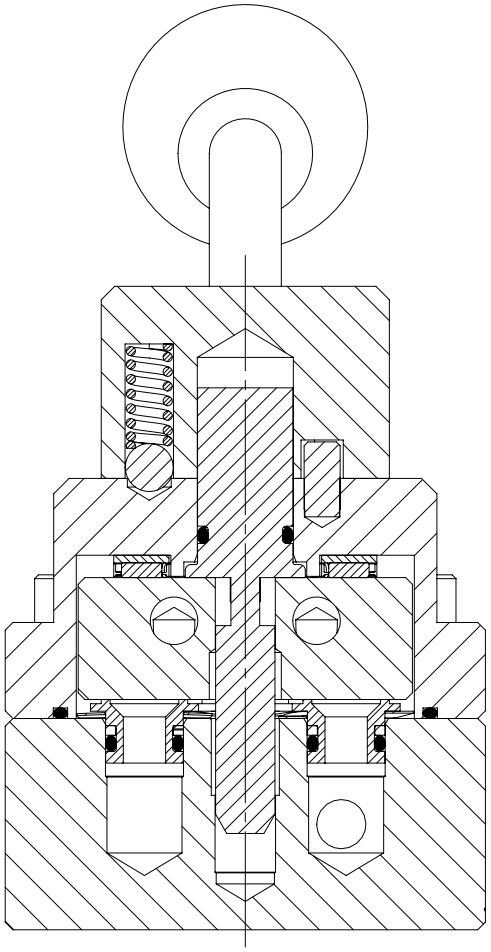
UP TO 690 BAR 10,000 PSI




The 4R25 is a 4 port rotary, lever operated directional control valve.

Using shear seal technology to provide excellent leakage performance with very good resistance to contamination, the valve is ideal for controlling double acting actuators, and is often used in offshore control panels.

- 3 position 4 way directional control valve
- 2 position 4 way version available
- 90˚ rotary lever operation
- Shear seal design
- Various flow pattern options available
- Ideal for controlling double acting actuators
- Suitable for use with mineral oils and water glycols
- Subsea variants available - contact us for advice
- Square drive and position locking variants available - contact us for advice
- Various porting options available, including manifold mounted version
- Various seal options available



Specifications

BASIC MODEL NUMBER	4R25
SYMBOL	 See flow patterns opposite
MAX WORKING PRESSURE	690 bar (10,000 psi)
MAX WORKING PRESSURE (TANK PORT)	100 bar (1,450 psi)
CV (FLOW CAPACITY)	0.67
FLUID	Liquids only See materials section
TEMPERATURE RANGE	See Product Selector opposite and Technical Data section
PORT SIZE	1/4"
OPERATING TORQUE	15 Nm (11 lbf.ft)
WEIGHT	1.7 kg (3.7 lb)

Specifications may change without notice

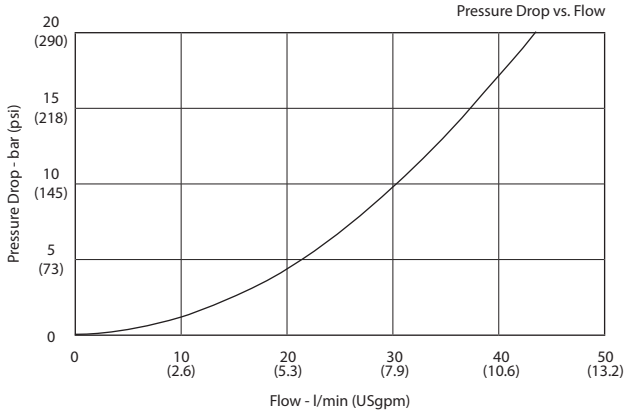
Materials

Externally Exposed Parts: 316, 431 and 302 stainless steel and electroless nickel plated steel.
Internally Wetted Parts: 316 and 431 stainless steel, silver steel, EN31 and acetal.

Containing some carbon steel parts, the standard valve is suitable for non-corrosive liquids only, such as mineral oil and water glycol. Contact us where use with corrosive fluids is required.


⚠ The standard valve has Viton® seals. Further seal options are available via the Product Selector. Compatibility with the working fluid at the operating temperature must be considered.
















Typical Performance



Typical performance based on water glycol

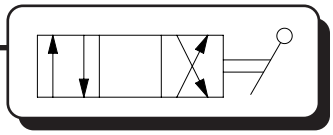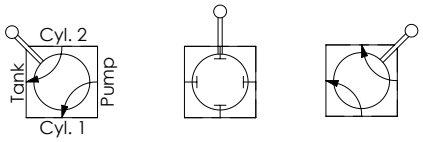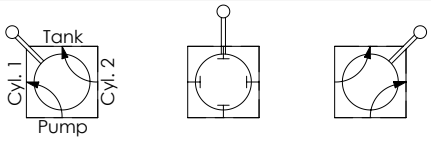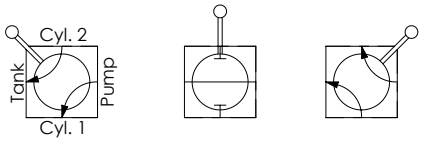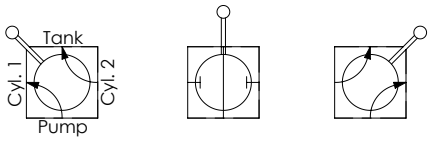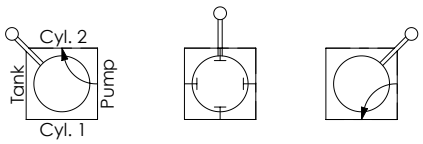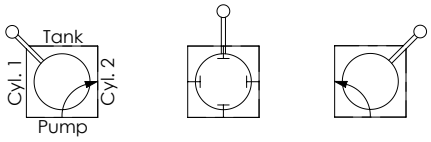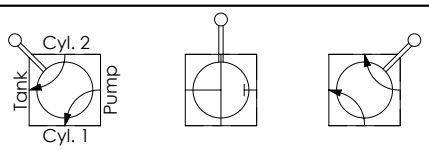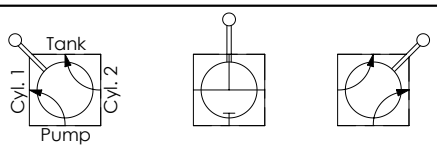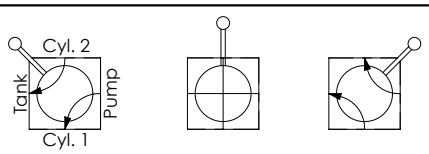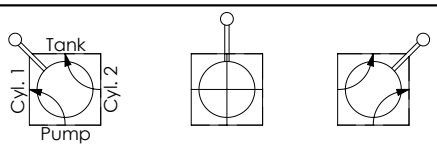Configuration Diagram



Flow pattern	Circuit symbol	Configuration - viewed on arrow A (see installation diagrams)	
		Standard valves	Manifold mounted and rear ported valves
A			
B			
C			
D			
E			

Note: interflow exists during switching. To avoid high return line pressure transients, ensure return path is unrestricted.

Product Selector

4R25 P - A - PM - NBR - 10K

VALVE TYPE	PORTING OPTIONS	FLOW PATTERN	VALVE OPTIONS	SEAL OPTIONS	MAX WORKING PRESSURE
			Leave blank if none required	Leave blank for Viton® seals -10˚C to +100˚C	
4R25	P 1/4" BSPP female	A	PM Panel mounted	NBR Nitrile seals -30˚C to +100˚C	10K 690 bar (10,000 psi) Liquid
	N 1/4" NPT female	B	RP Rear ported		
	M Manifold mount	C	NCS No centre stop (2 position 4 way)	HNBR Hydrogenated Nitrile seals -20˚C to +100˚C	
		D	PM and RP options not available for manifold version. Otherwise, any combination of options is allowable	Further seal options are available on request	
		E			
		Select from circuit symbols above			

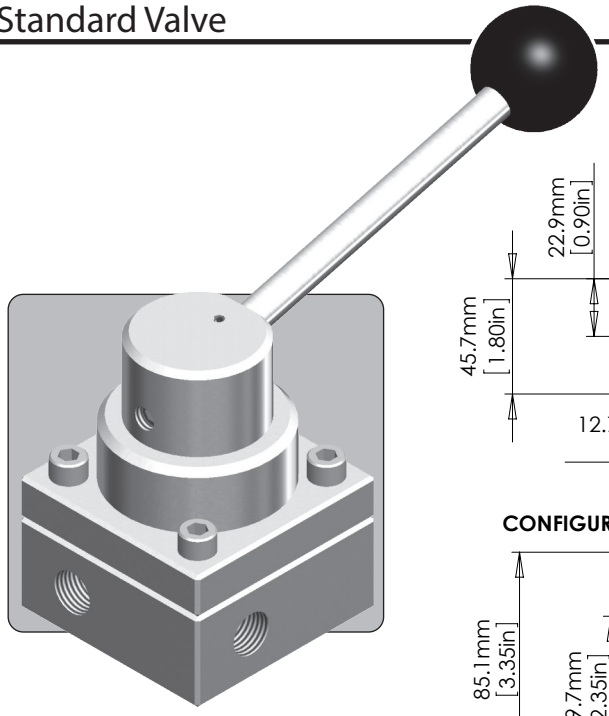
Repair and seal kits are available on request

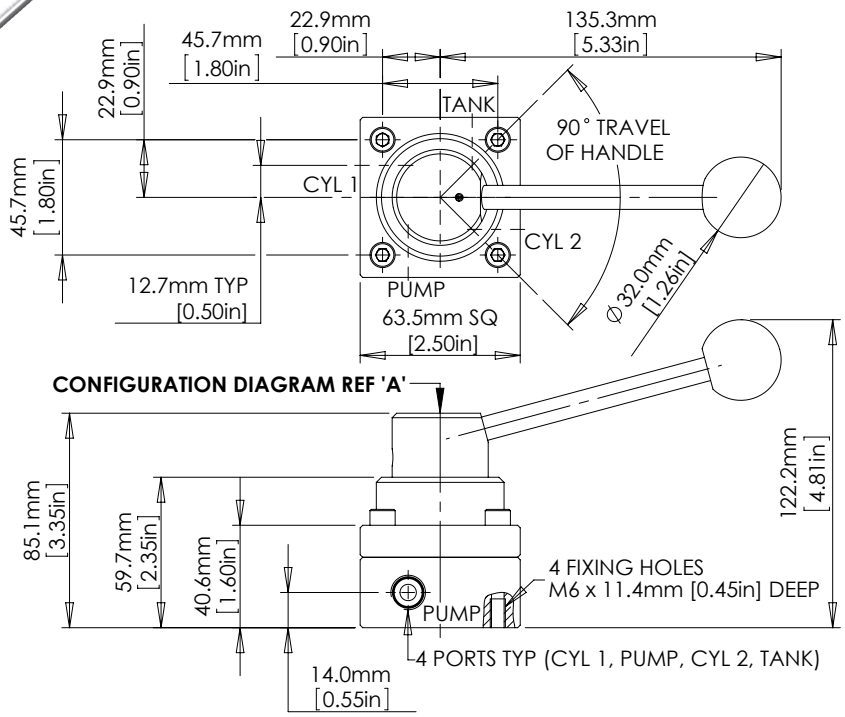
For a seal kit add SK at the end of the model code and for a repair kit add RK

4R25


ROTARY CONTROL VALVE


Standard Valve






Panel Mounted Valve

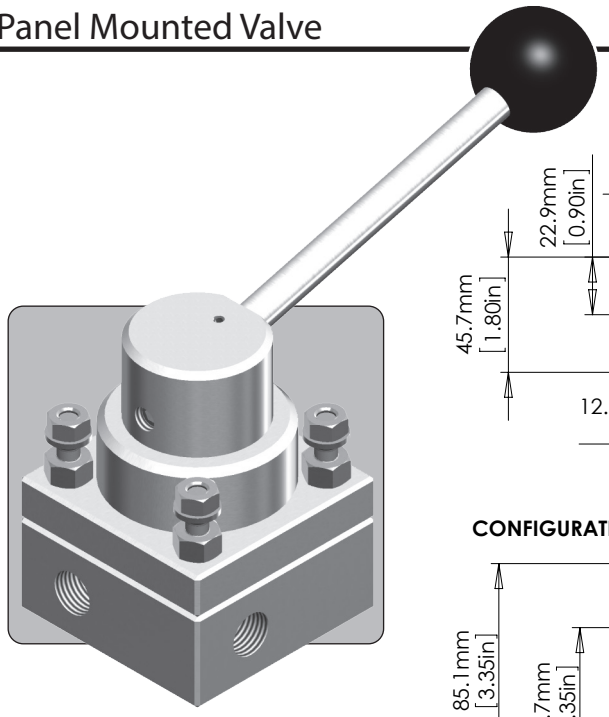


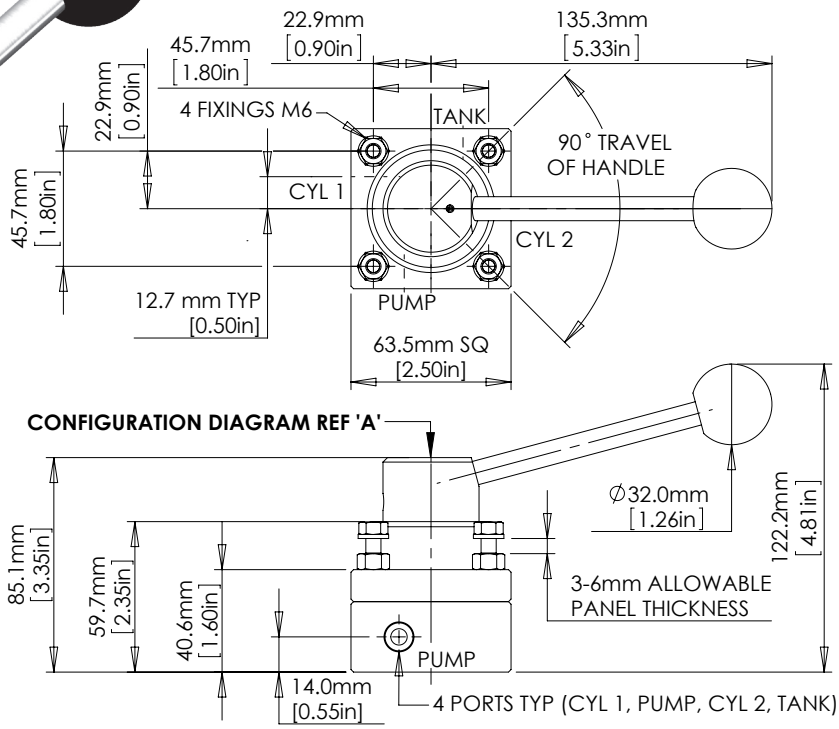

BS VALVES

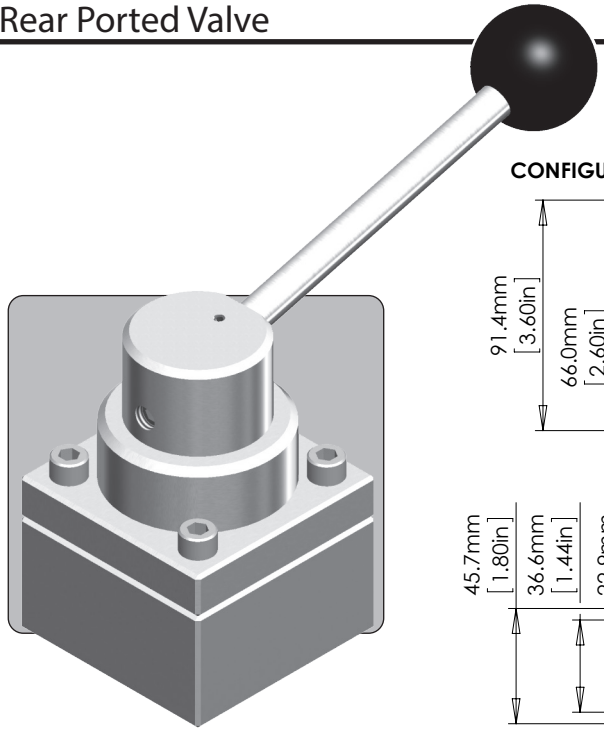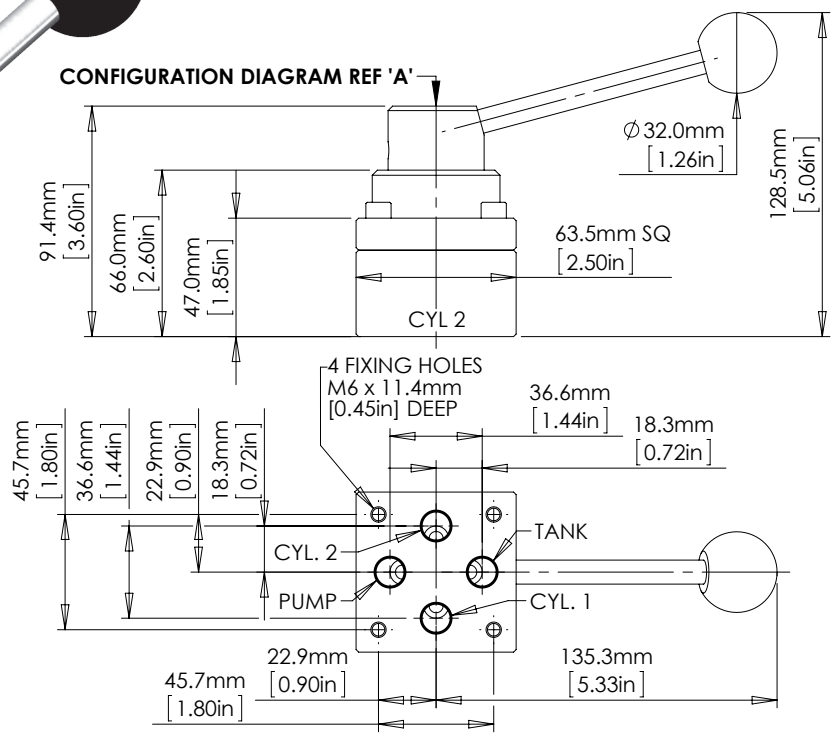Rear Ported Valve





Manifold Mount Valve

