
A3

DIAPHRAGM AIR ACTUATOR

1/8″ UP TO 10.3 BAR 150 PSI


The A3 is a stainless steel diaphragm-style pneumatic actuator for BiS valves.



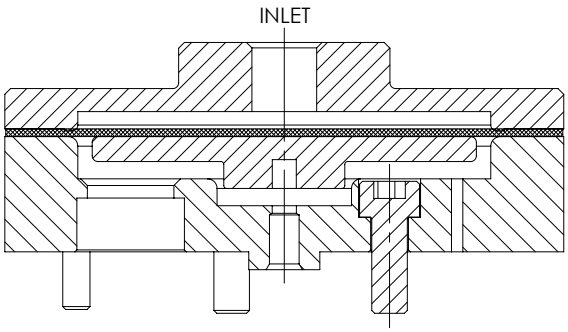

Low-pressure pneumatic operation. 1/8″ BSP pilot. Maximum pilot pressure 150 psi (10.3 bar).

Specifications

BASIC MODEL NUMBER	A3
SYMBOL	
MAX WORKING PRESSURE	10.3 bar (150 psi)
MAX WORKING PRESSURE	10.3 bar (150 psi)
FLUID	Air See materials section
TEMPERATURE RANGE	See Product Selector opposite and Technical Data section
PORT SIZE	1/8″
WEIGHT	1.3 kg (2.9 lb)


Specifications may change without notice


Materials

⚠ The standard valve has Viton® seals. Further seal options are available via the Product Selector. Compatibility with the working fluid at the operating temperature must be considered.

Typical Performance

Installation Diagram



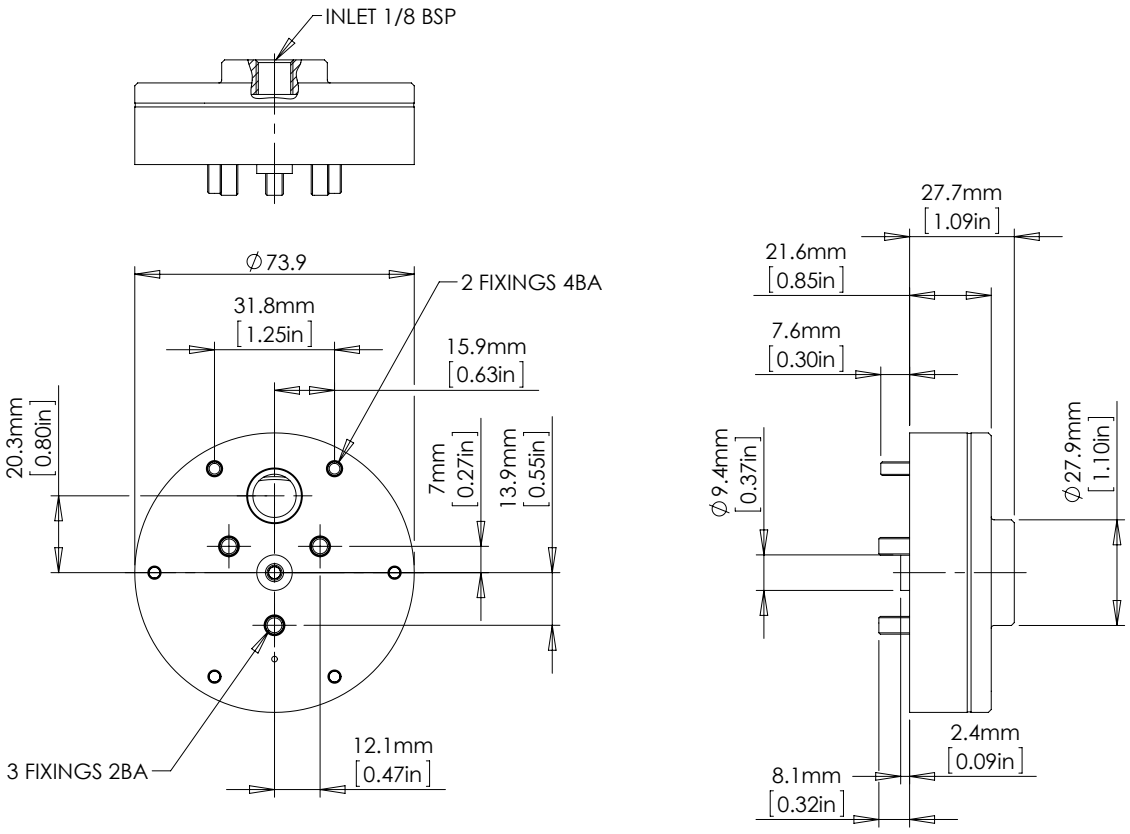

Product Selector

A3 ? - ? - n/a

VALVE TYPE	PORTING OPTIONS	SEAL OPTIONS	CRACKING PRESSURE
A3	? 1/8" BSPP female	Leave blank for Viton® seals -10°c to +120°c ?	n/a 10.3 bar (150 psi) ?

Repair and seal kits are available on request

For a seal kit add SK at the end of the model code and for a repair kit add RK