
BNV10FC

STOP VALVE


1/8″

UP TO 1,379 BAR
20,000 PSI




The BNV10FC is a cartridge style stop valve. It provides tight shut-off when closed via a T-bar handle.

Coarse adjustment allows fast operation. The valve may be used with the same functionality in either direction.

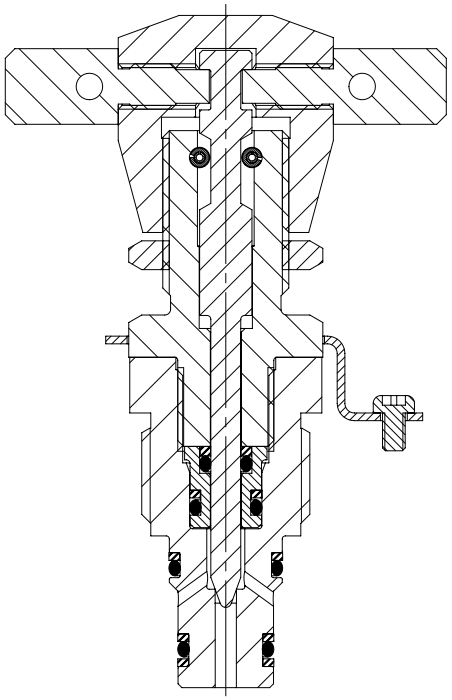

- Manual stop or shut-off valve
- Lockable adjustment
- Cartridge style ideal for use in manifolds
- Non-rotating valve stem protects valve seat
- Metal to metal seating with hardened stem for durability
- Suitable for uni-directional or bi-directional shut-off
- Short handle option for pressures up to 862 bar (12,500psi) allows compact system designs
- Stainless steel construction
- Suitable for use with mineral oils, water glycols and plain water
- Compatible with many other media, contact us for advice
- Various seal options available

Specifications

BASIC MODEL NUMBER	BNV10FC
SYMBOL	
MAX WORKING PRESSURE	1,379 bar (20,000 psi)
CV (FLOW CAPACITY)	Up to 0.20 See performance graph
FLUID	Liquids only See materials section
TEMPERATURE RANGE	See Product Selector opposite and Technical Data section
NOMINAL SIZE	1/8″
WEIGHT	0.29 kg (0.64 lb)

Specifications may change without notice

Materials


Externally Exposed Parts: 316 stainless steel and aluminium bronze.

Internally Wetted Parts: 316 and 17-4 PH stainless steel and acetal.

The standard valve is designed for use with mineral oil, water glycols and plain water, but may be used with a wide variety of media compatible with the materials of construction. Other material options are available, please contact us for advice.


⚠ The standard valve has Viton® seals. Further seal options are available via the Product Selector. Compatibility with the working fluid at the operating temperature must be considered.


Typical Performance

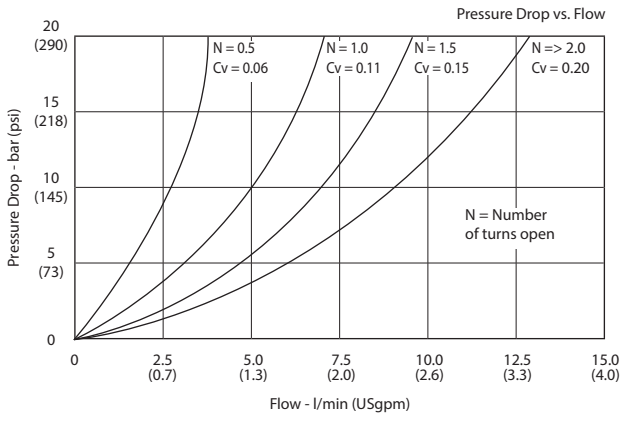


Typical performance based on water

Installation Diagram



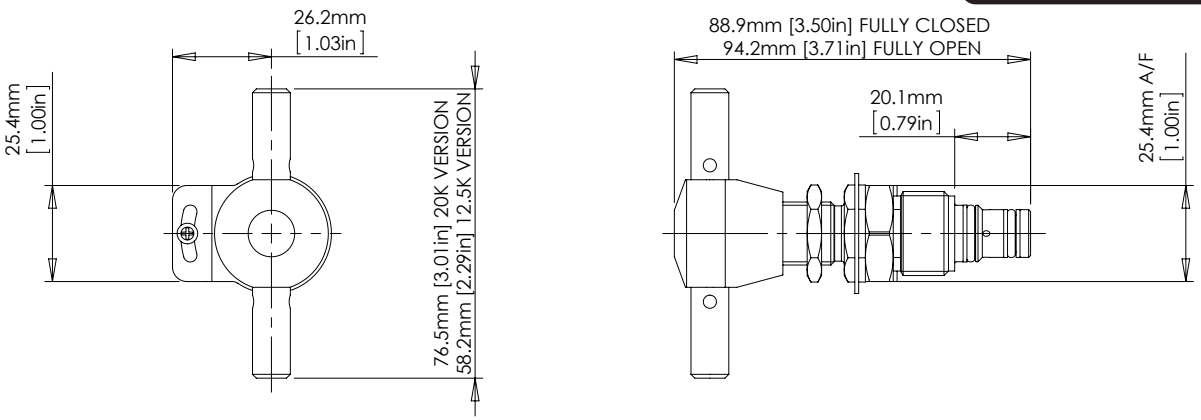

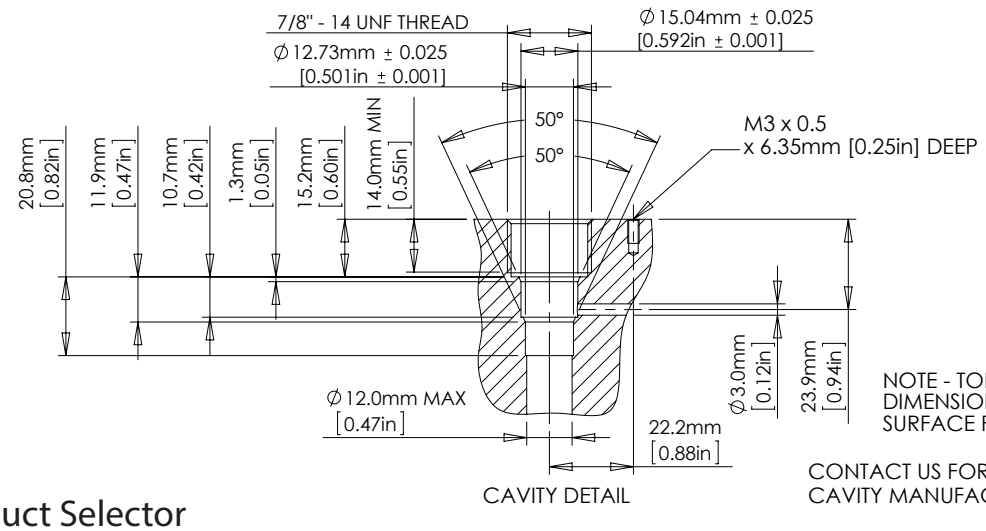

NOTE - TOLERANCED DIMENSIONS TO HAVE SURFACE FINISH OF 0.8 MAX

CONTACT US FOR FULL CAVITY MANUFACTURING DETAILS

Product Selector

BNV10 FC - NBR - 12.5K

VALVE TYPE	PORTING OPTIONS	SEAL OPTIONS	MAX WORKING PRESSURE
BNV10	FC option must be selected FC Full cartridge Seat in cartridge	Leave blank for Viton® seals -10˚C to +120˚C NBR Nitrile seals -30˚C to +105˚C EP EPDM seals -45˚C to +120˚C KLZ Kalrez® seals -25˚C to +120˚C HNBR Hydrogenated Nitrile seals -20˚C to +120˚C Further seal options are available on request ⚠ Exposure to high and low fluid temperatures will influence handle temperature. Operator safety must be considered	12.5K 862 bar (12,500 psi) Liquid 20K 1,379 bar (20,000 psi) Liquid

Repair and seal kits are available on request

For a seal kit add SK at the end of the model code and for a repair kit add RK