BNV25 -TB

STOP VALVE


1/4" 3/8"

UP TO 862 BAR
12,500 PSI




The BNV25-TB is a 1/4" nominal bore stop valve. It provides tight shut-off when closed via a T-bar handle.

Coarse adjustment allows fast operation. For uni-directional service, the valve is marked with a preferred direction of flow, but the valve may be used with the same functionality in the opposite direction.

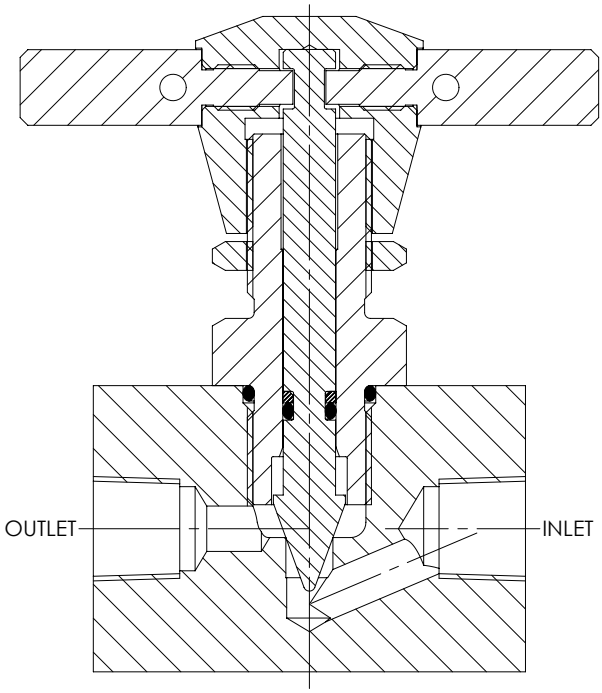

- Manual stop or shut-off valve
- Lockable adjustment
- Panel mount option
- Non-rotating valve stem protects valve seat
- Suitable for uni-directional or bi-directional shut-off
- Stainless steel construction
- Suitable for use with mineral oils, water glycols and plain water
- Compatible with many other media, contact us for advice
- All wetted parts comply with NACE MR01-75
- Various porting options available, including manifold mount and cartridge installation options
- Various seal options available

Specifications

BASIC MODEL NUMBER	BNV25-TB
SYMBOL	
MAX WORKING PRESSURE	862 bar (12,500 psi)
CV (FLOW CAPACITY)	Up to 0.75 See performance graph
FLUID	Liquids only See materials section
TEMPERATURE RANGE	See Product Selector opposite and Technical Data section
PORT SIZE	1/4" or 3/8"
WEIGHT	PORTED 0.79 kg (1.73 lb) C 0.23 kg (0.50 lb) FC 0.48 kg (1.05 lb)

Specifications may change without notice


Materials

Externally Exposed Parts: 316 stainless steel and aluminium bronze. Electroless nickel plated bolts for the manifold mount version.
Internally Wetted Parts: 316 and 17-4 PH stainless steel and acetal.

The standard valve is designed for use with mineral oil, water glycols and plain water, but may be used with a wide variety of media compatible with the materials of construction. Other material options are available, please contact us for advice.

⚠ The standard valve has Viton® seals. Further seal options are available via the Product Selector. Compatibility with the working fluid at the operating temperature must be considered.


Typical Performance

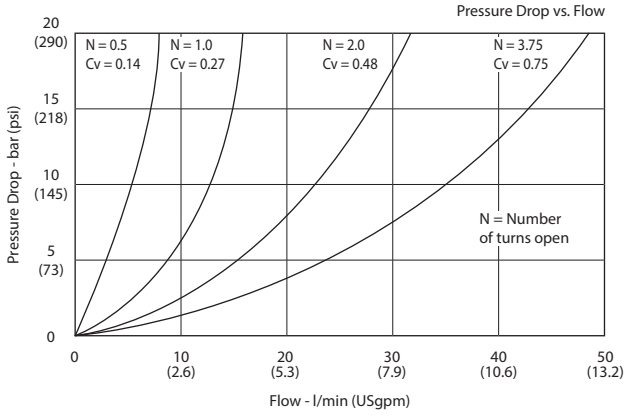

Typical performance based on water

Installation Diagram

STANDARD VALVE

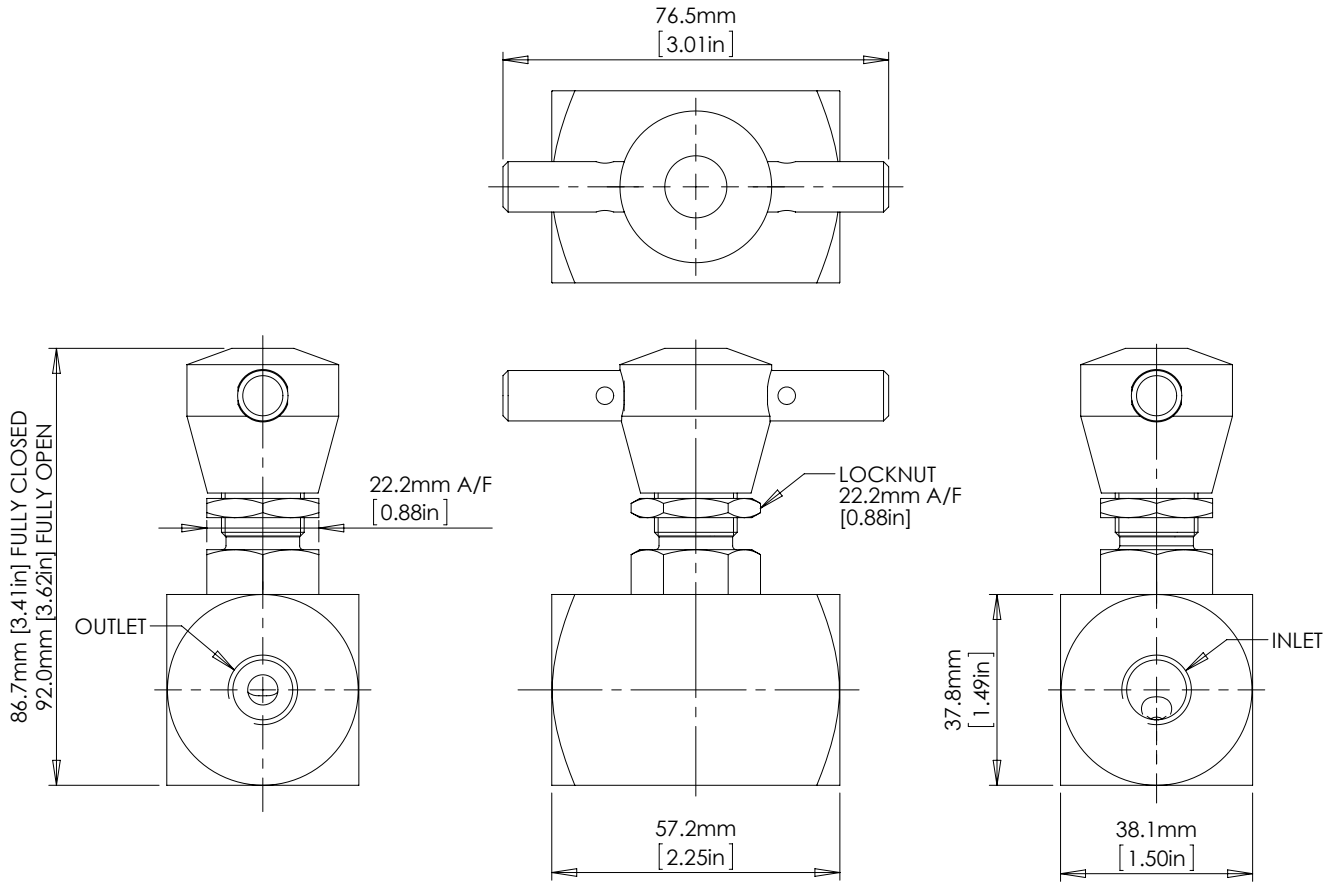

Product Selector

BNV25 P - TB - PM - NBR - 12.5K


VALVE TYPE	PORTING OPTIONS	HANDLE TYPE	VALVE OPTIONS	SEAL OPTIONS	MAX WORKING PRESSURE
BNV25	P 1/4" BSPP female N 1/4" NPT female /37P 3/8" BSPP female /37N 3/8" NPT female M Manifold mount C Cartridge style Seat in cavity FC Full cartridge Seat in cartridge	TB option must be selected TB T-bar handle	Leave blank if not required PM Panel mounted Not available for manifold or cartridge versions	Leave blank for Viton® seals -10˚c to +120˚c NBR Nitrile seals -30˚c to +105˚c EP EPDM seals -45˚c to +120˚c KLZ Kalrez® seals -25˚c to +120˚c HNBR Hydrogenated Nitrile seals -20˚c to +120˚c Further seal options are available on request ⚠ Exposure to high and low fluid temperatures will influence handle temperature. Operator safety must be considered.	12.5K 862 bar (12,500 psi) Liquid


Repair and seal kits are available on request

For a seal kit add SK at the end of the model code and for a repair kit add RK

BNV25 -TB
STOP VALVE


Cartridge Valve

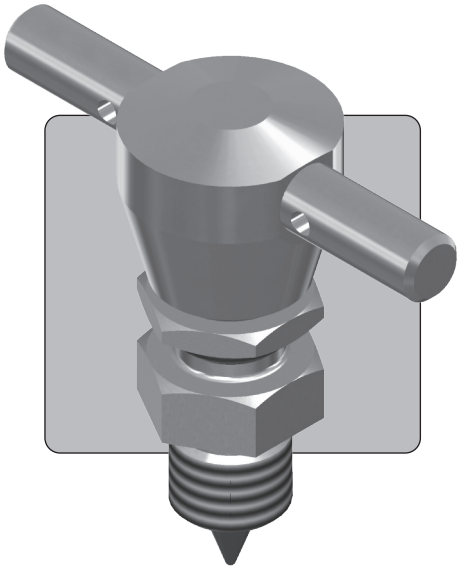


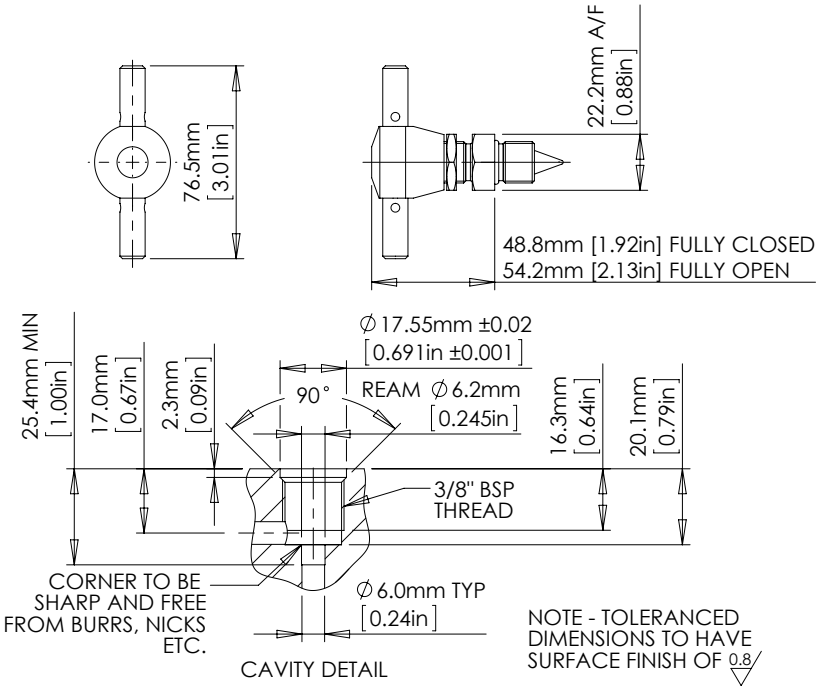

CONTACT US FOR FULL CAVITY MANUFACTURING DETAILS


Full Cartridge Valve

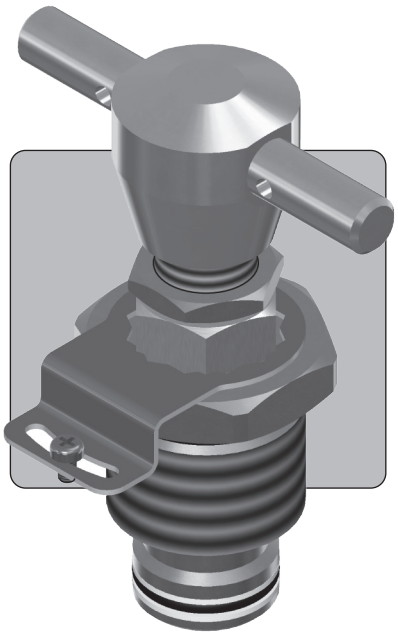


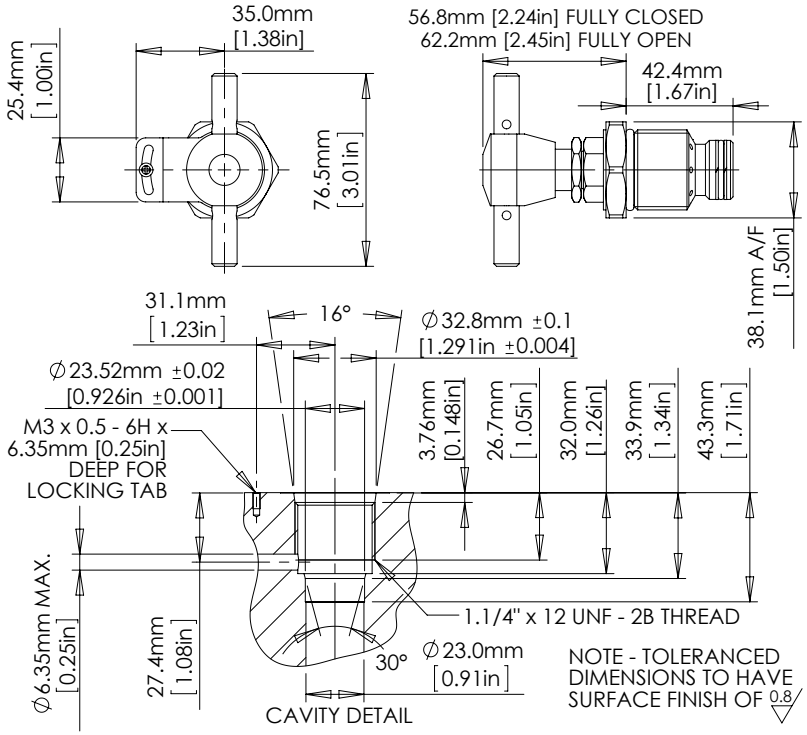

CONTACT US FOR FULL CAVITY MANUFACTURING DETAILS

Panel Mounted Valve

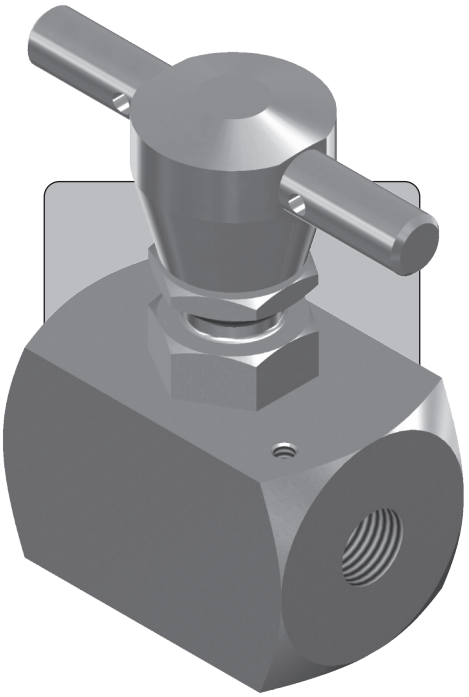

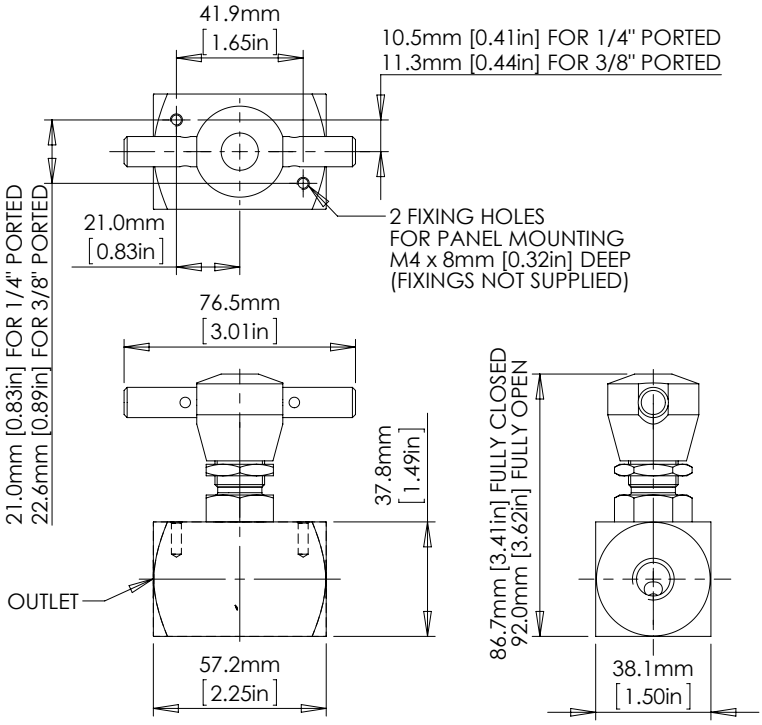

Manifold Mount Valve

