
BNV25

STOP VALVE


1/4" 3/8"

UP TO 690 BAR
10,000 PSI




The BNV25 is a 1/4" nominal bore stop valve. It provides tight shut-off when closed via the knurled handwheel.

Coarse adjustment allows fast operation. For uni-directional service, the valve is marked with a preferred direction of flow, but the valve may be used with the same functionality in the opposite direction.

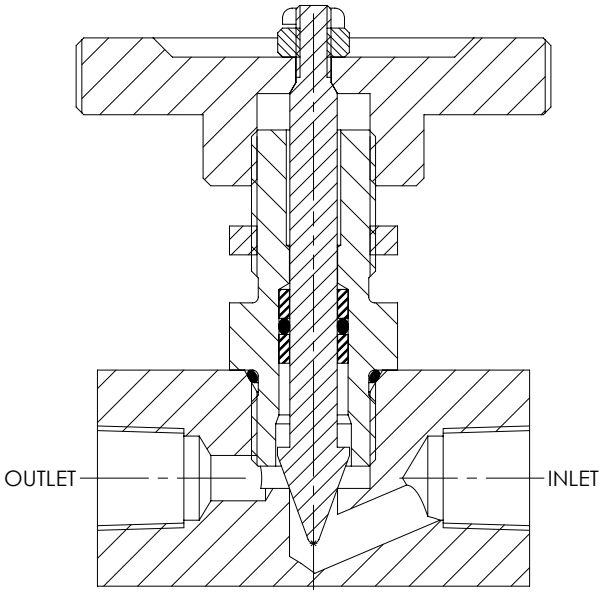

- Manual stop or shut-off valve
- Lockable adjustment
- Panel mount option
- Non-rotating valve stem protects valve seat
- Suitable for uni-directional or bi-directional shut-off
- Stainless steel construction
- Suitable for use with mineral oils, water glycols and plain water
- Compatible with many other media, contact us for advice
- NACE MR01-75 compliant versions available, contact us for advice
- Various porting options available, including manifold mount and cartridge installation options
- Various seal options available

Specifications

BASIC MODEL NUMBER	BNV25
SYMBOL	
MAX WORKING PRESSURE	690 bar (10,000 psi)
CV (FLOW CAPACITY)	Up to 0.52 See performance graph
FLUID	Liquids only See materials section
TEMPERATURE RANGE	See Product Selector opposite and Technical Data section
PORT SIZE	1/4" or 3/8"
WEIGHT	PORTED 0.65 kg (1.43 lb) C 0.35 kg (0.77 lb) FC 0.50 kg (1.10 lb)

Specifications may change without notice


Materials

Externally Exposed Parts: 316, 17-4 PH and other 300 series stainless steels. Electroless nickel plated bolts for the manifold mount version.
Internally Wetted Parts: 316 and 17-4 PH stainless steel, acetal and PTFE.

The standard valve is designed for use with mineral oil, water glycols and plain water, but may be used with a wide variety of media compatible with the materials of construction. Other material options are available, please contact us for advice.

⚠ The standard valve has Viton® seals. Further seal options are available via the Product Selector. Compatibility with the working fluid at the operating temperature must be considered.


Typical Performance

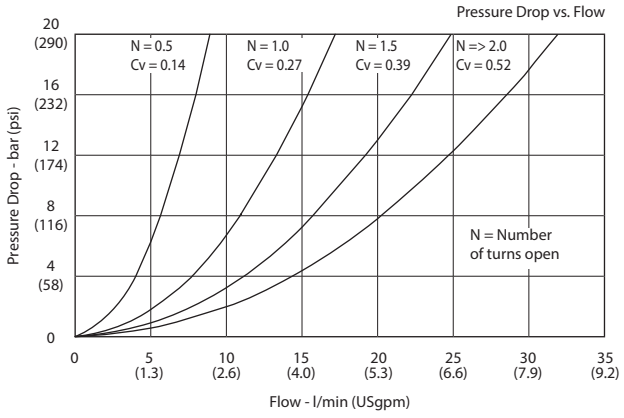

Typical performance based on water

Installation Diagram

STANDARD VALVE

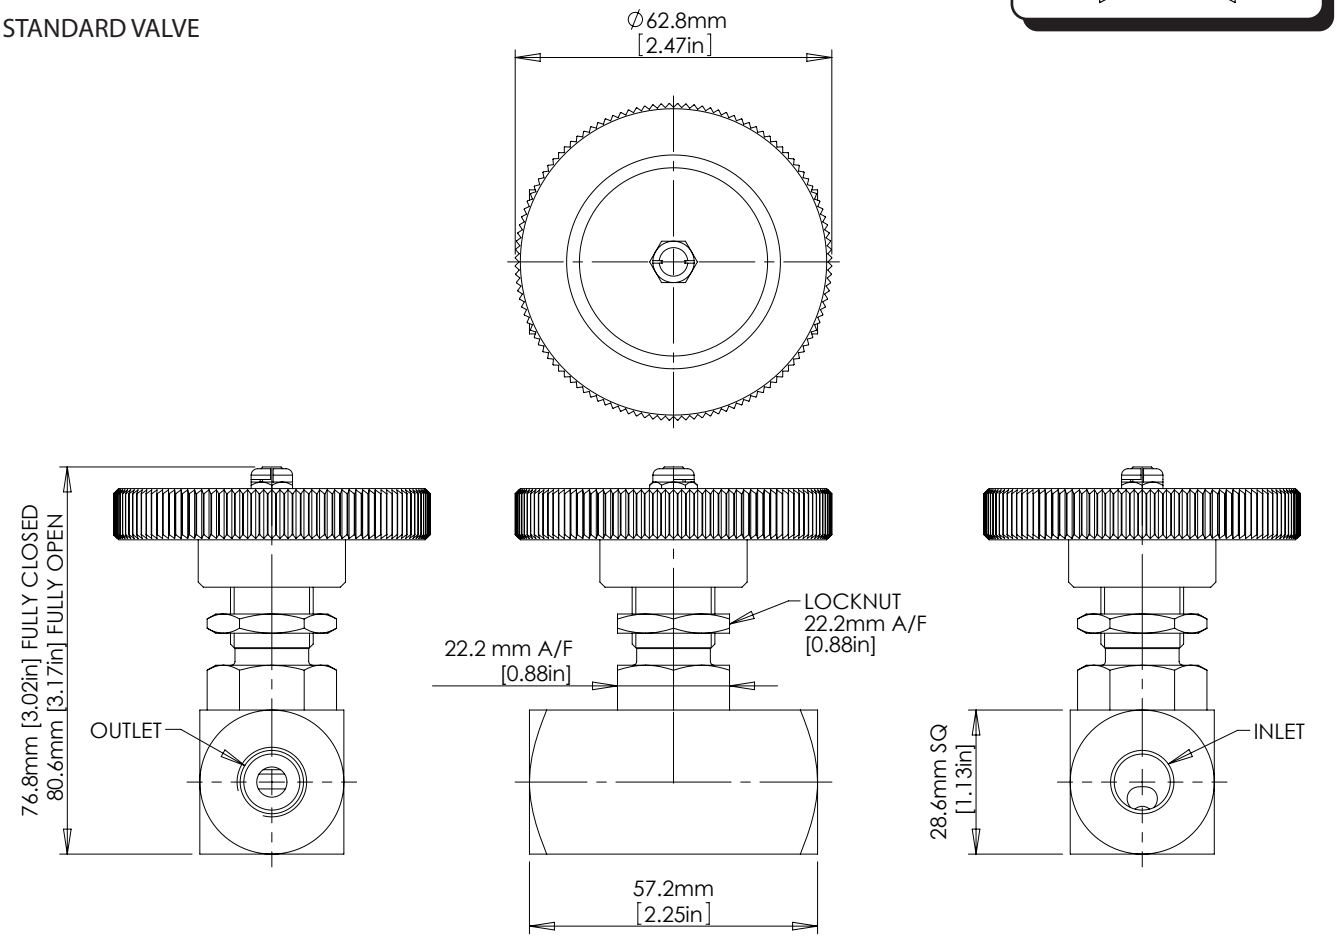

Product Selector

BNV25 P - PM - NBR - 10K


VALVE TYPE	PORTING OPTIONS	VALVE OPTIONS	SEAL OPTIONS	MAX WORKING PRESSURE
		Leave blank if not required	Leave blank for Viton® seals -10˚C to +120˚C	
BNV25	P 1/4" BSPP female	PM Panel mounted Not available for manifold or cartridge versions	NBR Nitrile seals -30˚C to +105˚C	10K 690 bar (10,000 psi) Liquid
	N 1/4" NPT female		EP EPDM seals -45˚C to +120˚C	
	/37P 3/8" BSPP female		KLZ Kalrez® seals -25˚C to +120˚C	
	/37N 3/8" NPT female		HNBR Hydrogenated Nitrile seals -20˚C to +120˚C	
	M Manifold mount		Further seal options are available on request	
	C Cartridge style Seat in cavity		⚠ Exposure to high and low fluid temperatures will influence handle temperature. Operator safety must be considered	
	FC Full cartridge Seat in cartridge			


Repair and seal kits are available on request

For a seal kit add SK at the end of the model code and for a repair kit add RK

BNV25
STOP VALVE


Cartridge Valve

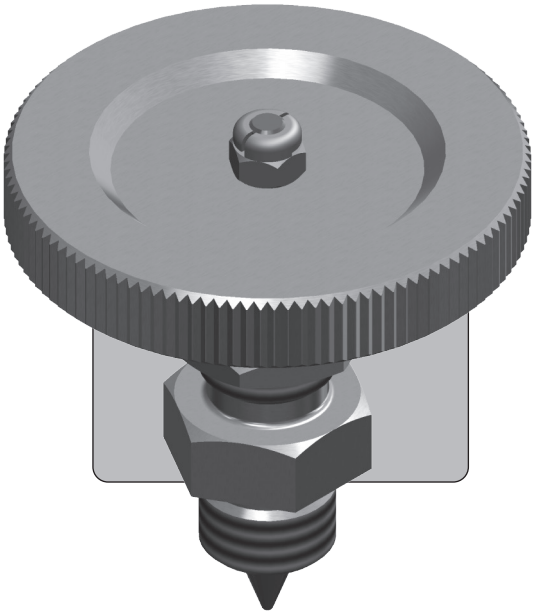


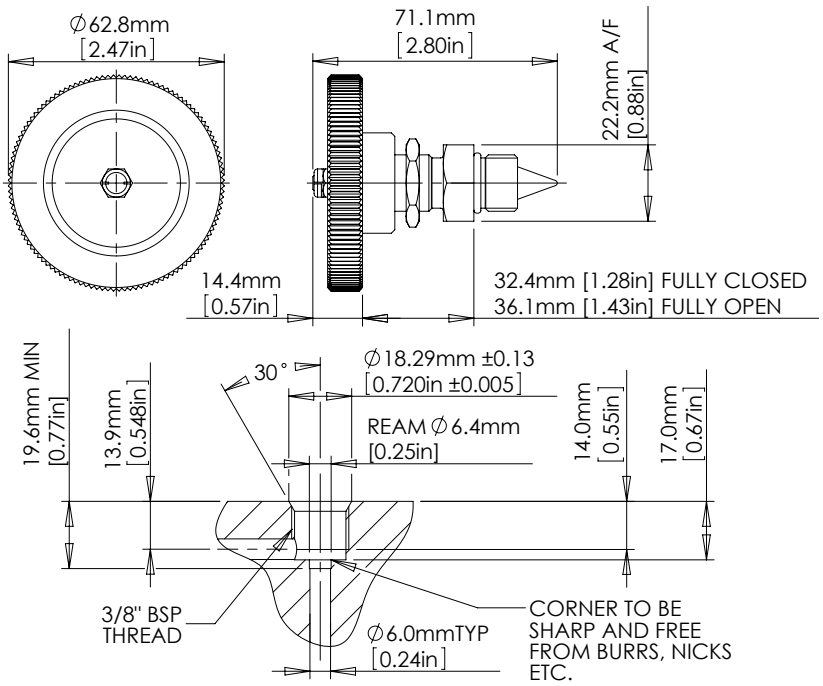

CONTACT US FOR FULL CAVITY MANUFACTURING DETAILS


Full Cartridge Valve

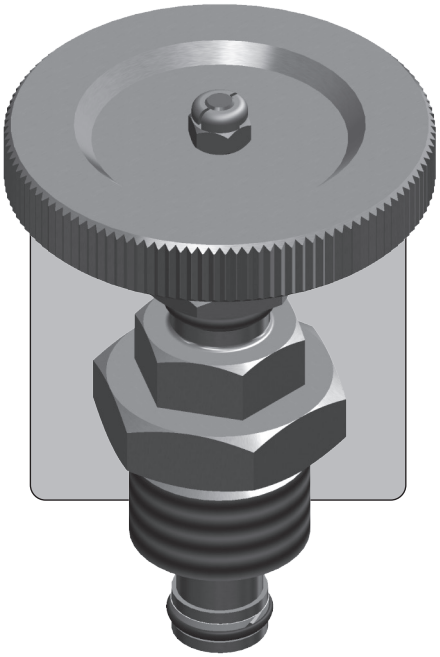


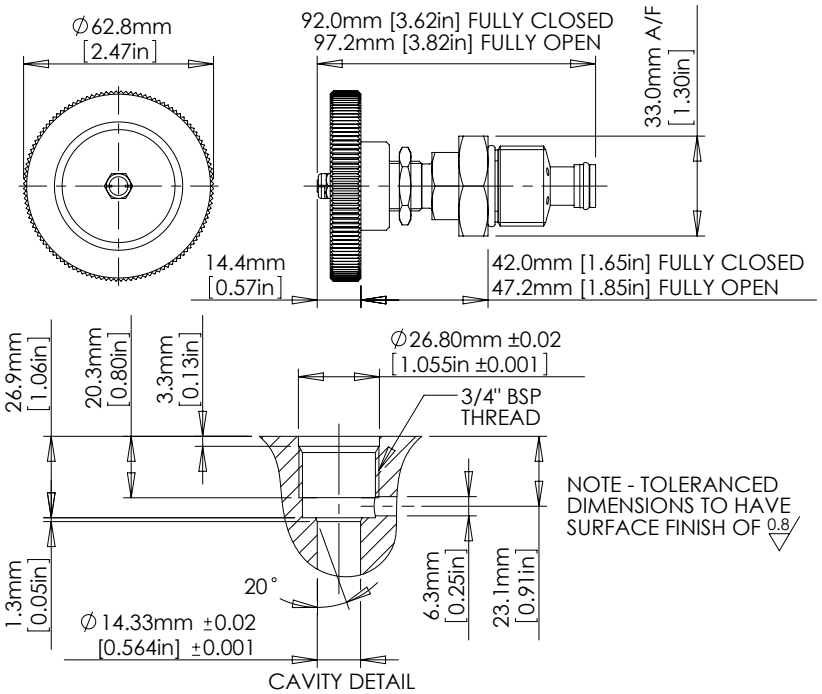

CONTACT US FOR FULL CAVITY MANUFACTURING DETAILS

Panel Mounted Valve

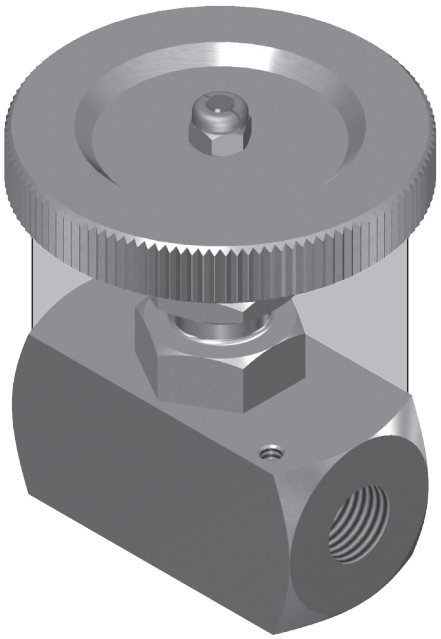

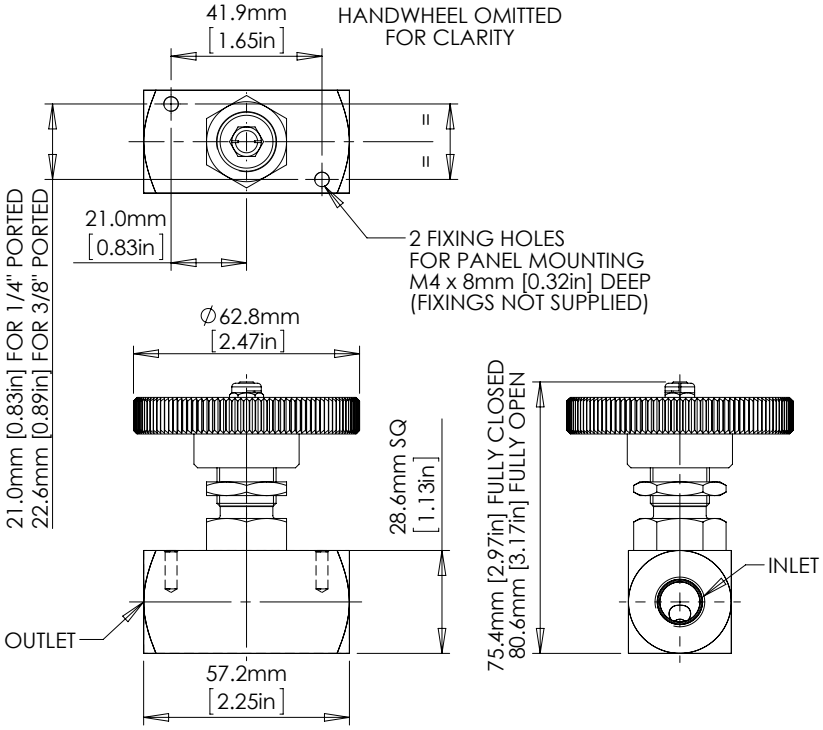

Manifold Mount Valve

