
BNV50 -G

STOP VALVE

1/2" 3/4"


UP TO 414 BAR
6,000 PSI

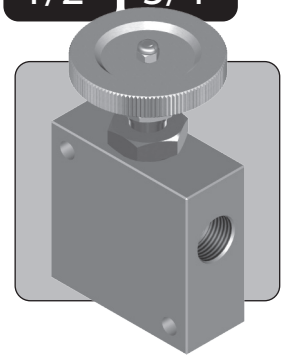


The BNV50-G is a 1/2" nominal bore stop valve. It provides tight shut-off when closed via the knurled handwheel and is soft seated allowing use with liquid or gas.

Coarse adjustment allows fast operation. The valve is designed for uni-directional service only.

- Manual stop or shut-off valve for liquid or gas
- Lockable adjustment
- Panel mount option
- Non-rotating valve stem protects valve seat
- Suitable for uni-directional shut-off
- Stainless steel construction
- Suitable for use with air, nitrogen, sweet natural gas, mineral oils and water glycols
- Compatible with many other media, contact us for advice
- Cartridge version available, contact us for details
- Various porting options available
- Various seal options available

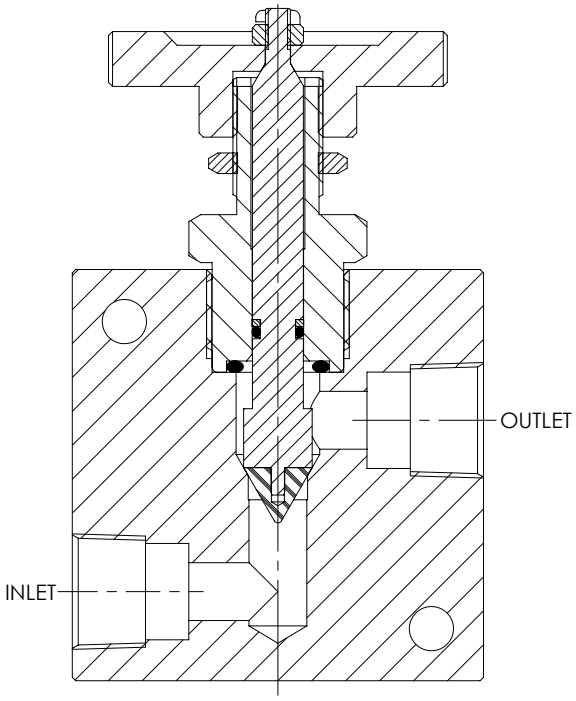

Specifications

BASIC MODEL NUMBER	BNV50-G
SYMBOL	
MAX WORKING PRESSURE	414 bar (6,000 psi)
CV (FLOW CAPACITY)	Up to 2.1 See performance graph
FLUID	Liquids and Gases See materials section
TEMPERATURE RANGE	See Product Selector opposite and Technical Data section
PORT SIZE	1/2" or 3/4"
WEIGHT	1.7 kg (3.7 lb)

Specifications may change without notice


Materials

Externally Exposed Parts: 316, 431 and other 300 series stainless steels.
Internally Wetted Parts: 316 and 431 stainless steel, polyamide-imide and acetal.

The standard valve is designed for use with air, nitrogen, sweet natural gas, mineral oil and water glycols but may be used with a wide variety of media compatible with the materials of construction. Other material options are available, please contact us for advice.


⚠ The standard valve has Viton® seals. Further seal options are available via the Product Selector. Compatibility with the working fluid at the operating temperature must be considered.


Typical Performance

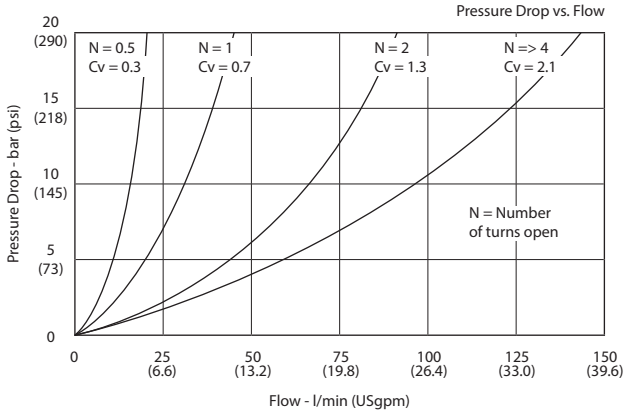

Typical performance based on water glycol

Installation Diagram



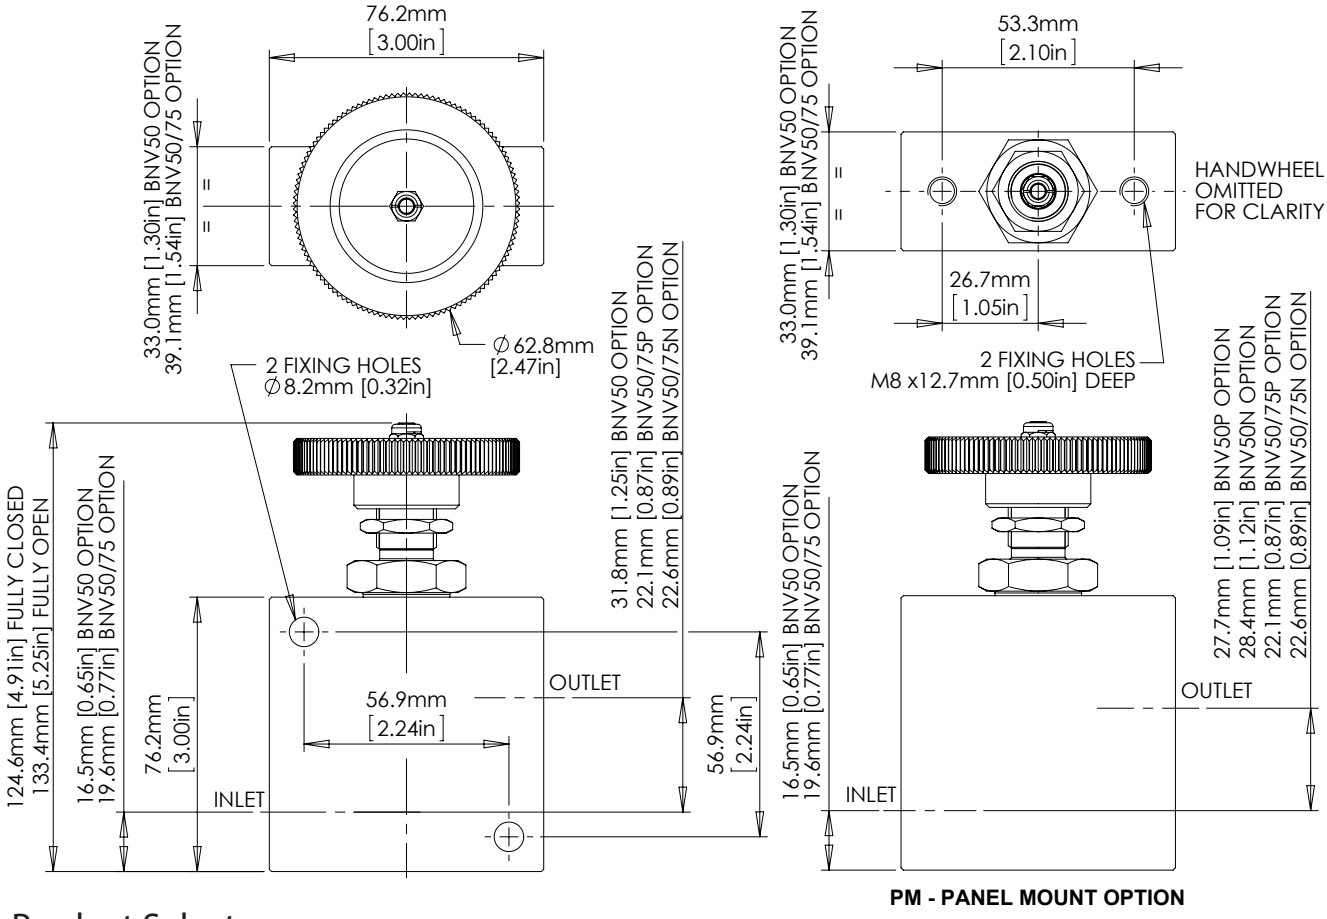

PM - PANEL MOUNT OPTION

Product Selector

BNV50 P - G - PM - NBR - 6K

VALVE TYPE	PORTING OPTIONS	SEAT TYPE	VALVE OPTIONS	SEAL OPTIONS	MAX WORKING PRESSURE
		G option must be selected	Leave blank if not required	Leave blank for Viton® seals -10˚C to +120˚C	
BNV50	P 1/2" BSPP female	G Soft seats	PM Panel mounted	NBR Nitrile seals -30˚C to +105˚C	6K 414 bar (6,000 psi)
	N 1/2" NPT female			EP EPDM seals -45˚C to +120˚C	
	/75P 3/4" BSPP female			KLZ Kalrez® seals -25˚C to +120˚C	
	/75N 3/4" NPT female			HNBR Hydrogenated Nitrile seals -20˚C to +120˚C	
Repair and seal kits are available on request For a seal kit add SK at the end of the model code and for a repair kit add RK				Further seal options are available on request ⚠ Exposure to high and low fluid temperatures will influence handle temperature. Operator safety must be considered.	