
BNV56AE

STOP VALVE

3/8"


UP TO 1,379 BAR
20,000 PSI

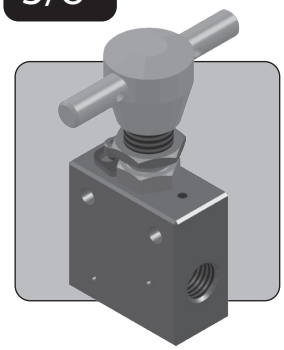


The BNV56AE is a 3/8" OD tube medium pressure ported stop valve. It provides tight shut-off when closed via the T-bar handle.

The elastomeric stem seal design provides long term use without the need to adjust seal packings in service.
Combined with a minimised backlash design, the valve is particularly suited to pressure testing and other applications where reliable operation is essential.

- Manual stop or shut-off valve
- Suitable for uni-directional or bi-directional shut-off
- Industry standard port and mounting configurations
- Non-rotating valve stem protects valve seat
- Free running, anti-galling handle assembly
- Minimised backlash provides greater operator control
- Metal to metal seating with hardened stem for durability
- Panel mountable and lockable adjustment
- Suitable for use with mineral oils, water glycols and plain water
- Compatible with many other media, contact us for advice
- All wetted parts comply with NACE MR01-75

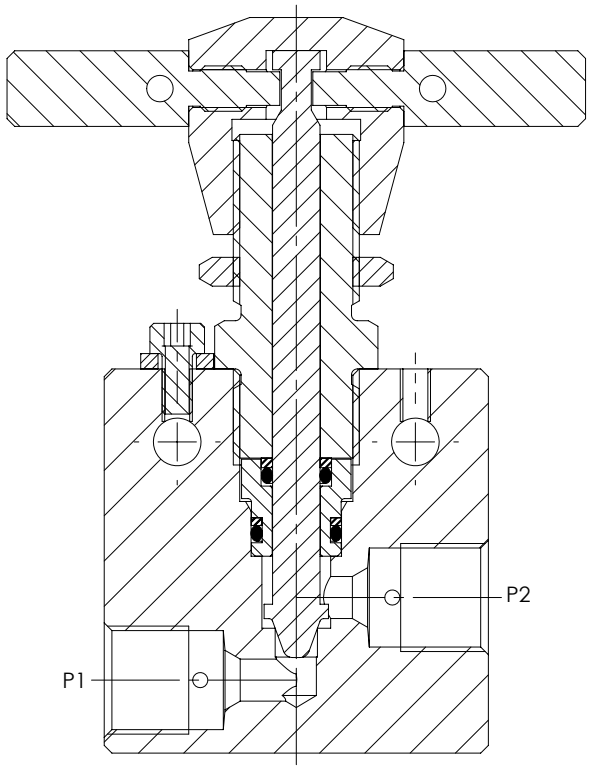

Specifications

BASIC MODEL NUMBER	BNV56AE
SYMBOL	
MAX WORKING PRESSURE	1,379 bar (20,000 psi)
CV (FLOW CAPACITY)	Up to 0.68 See performance graph
FLUID	Liquids only See materials section
TEMPERATURE RANGE	See Product Selector opposite and Technical Data section
PORT SIZE	3/8" OD medium pressure
WEIGHT	0.7 kg (1.5 lb)

Specifications may change without notice

Materials


Externally Exposed Parts: 316, other 300 series stainless steels and aluminium bronze.

Internally Wetted Parts: 316 and 17-4 PH stainless steel and acetal.

The standard valve is designed for use with mineral oil, water glycols and plain water, but may be used with a wide variety of media compatible with the materials of construction. Other material options are available, please contact us for advice.

⚠ The standard valve has Viton® seals. Further seal options are available via the Product Selector. Compatibility with the working fluid at the operating temperature must be considered.


Typical Performance

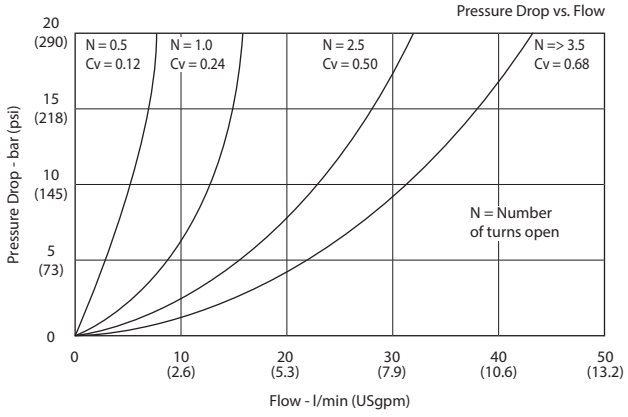

Typical performance based on water

Installation Diagram

PORTING PATTERN - 01

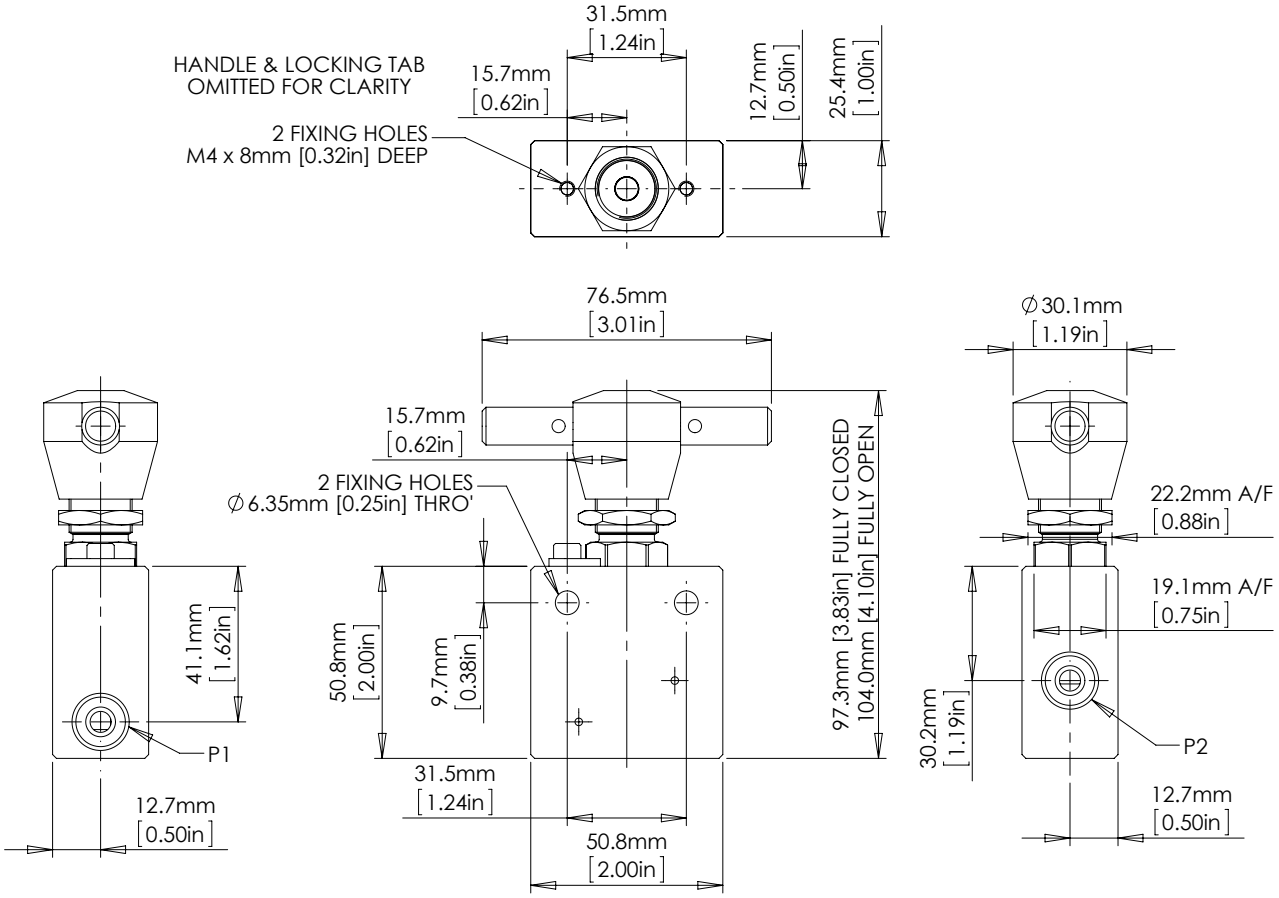

Product Selector

BNV56AE - 01 - NBR - 20K

VALVE TYPE	PORTING PATTERN	SEAL OPTIONS	MAX WORKING PRESSURE
BNV56AE	01 2-way straight 02 2-way angle 03 3-way (2 inlets) 04 3-way (2 outlets) 05 3-way, 2 stem, block-and-bleed	Leave blank for Viton® seals -10˚C to +120˚C NBR Nitrile seals -30˚C to +105˚C EP EPDM seals -45˚C to +120˚C KLZ Kalrez® seals -25˚C to +120˚C HNBR Hydrogenated Nitrile seals -20˚C to +120˚C	20K 1,379 bar (20,000 psi) Liquid

Repair and seal kits are available on request

For a seal kit add SK at the end of the model code and for a repair kit add RK


Further seal options are available on request


⚠ Exposure to high and low fluid temperatures will influence handle temperature. Operator safety must be considered.

BNV56AE


STOP VALVE


Porting Pattern 02

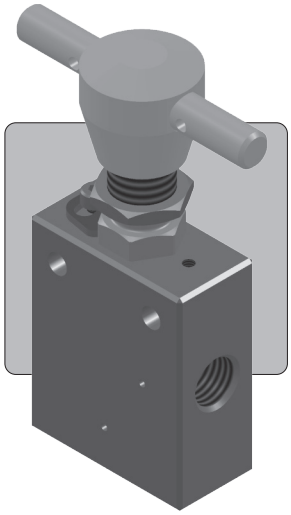

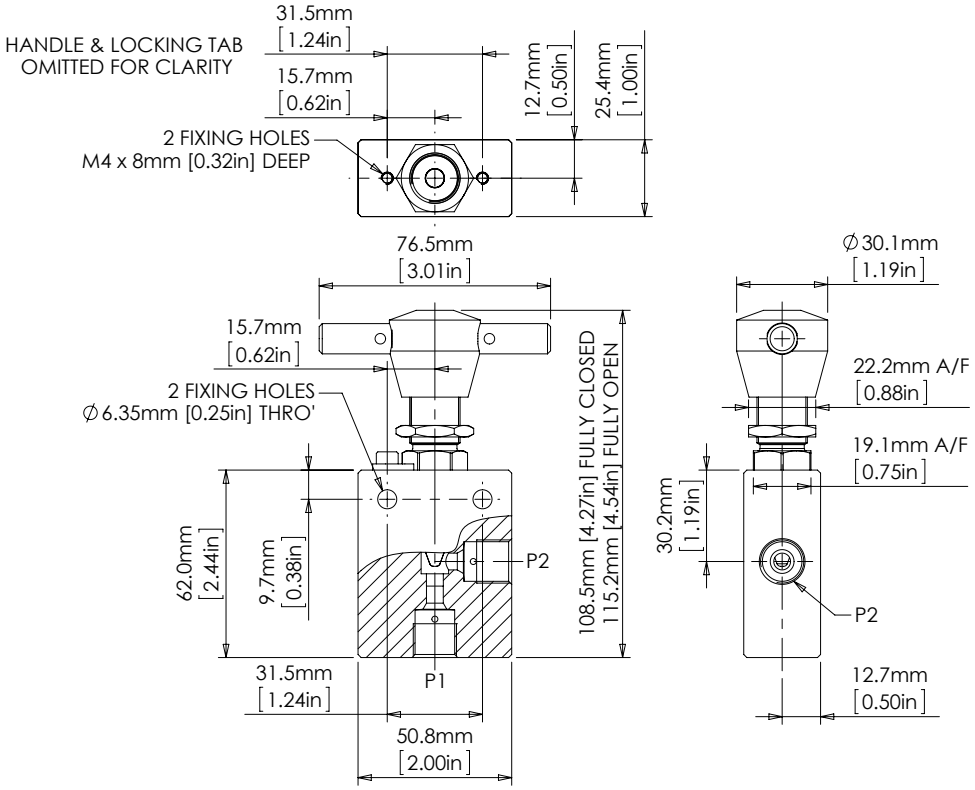



Porting Pattern 03

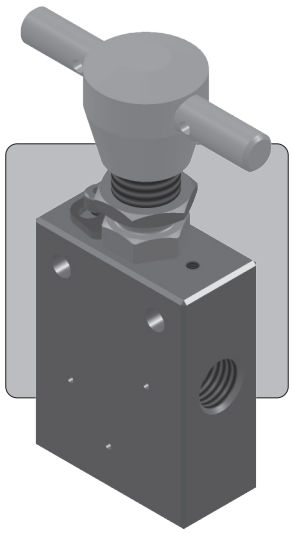

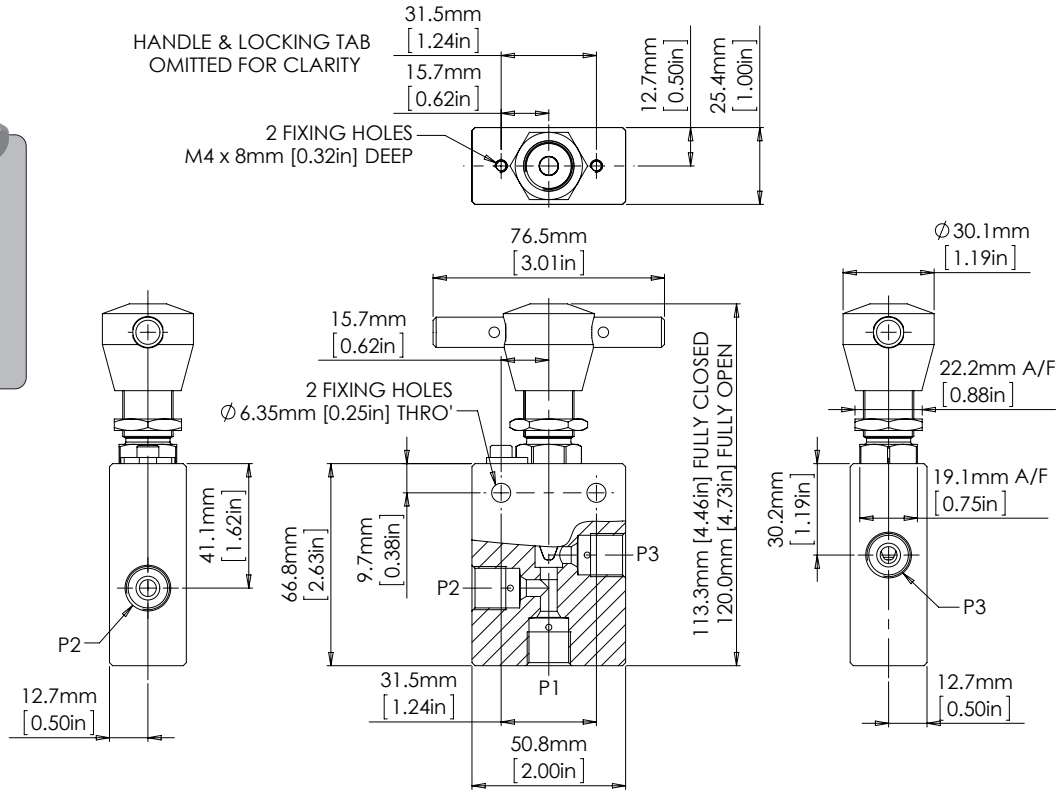

Porting Pattern 04

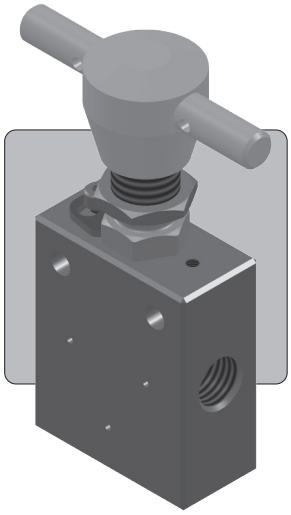

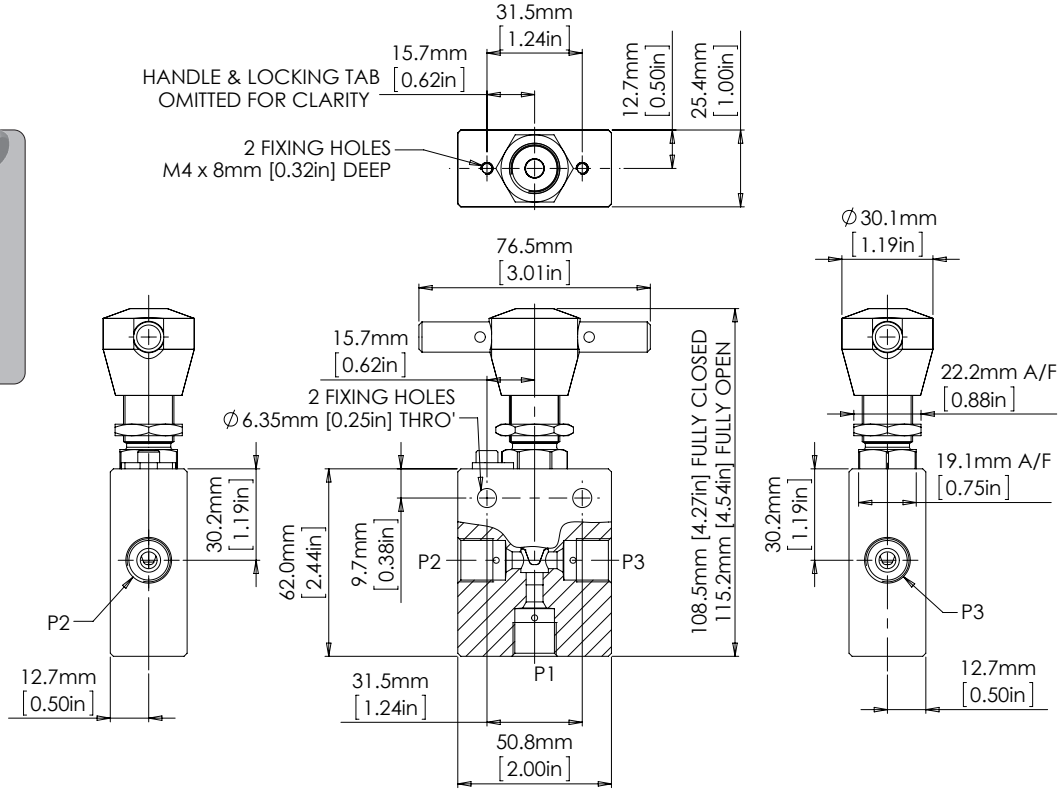

Porting Pattern 05

