
C125

CHECK VALVE

1¼"


UP TO 483 BAR 7,000 PSI




The C125 is a 1¼" nominal bore check valve. It will allow flow in one direction, and blocks flow in the opposite direction. It may also be referred to as a non-return valve.

The valve uses sealed poppet technology to give virtually zero leakage with liquids and gases.

- Check or Non-Return valve
- Stainless steel construction
- Sealed poppet design
- Virtually zero leakage
- Cost effective one piece body design
- Can be used subsea
- Suitable for liquid or gas
- Suitable for use with air, nitrogen, mineral oils, water glycols and plain water
- For Pressure Equipment Directive compliance, always advise us of system medium
- Various seal options available
- Various porting options available

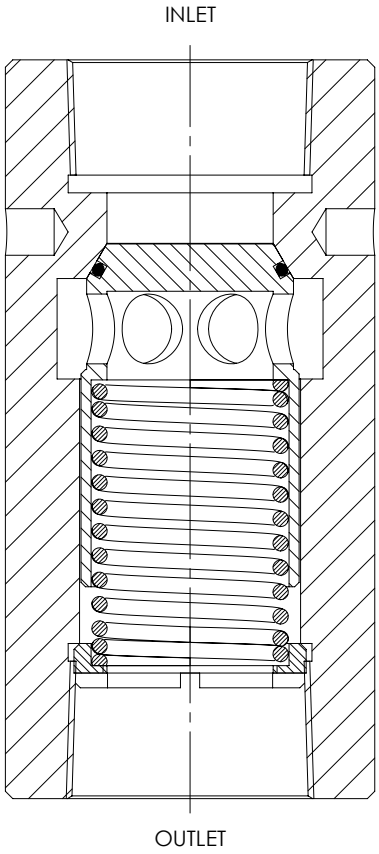

Specifications

BASIC MODEL NUMBER	C125
SYMBOL	
MAX WORKING PRESSURE (LIQUID)	483 bar (7,000 psi)
MAX WORKING PRESSURE (GAS)	241 bar (3,500 psi)
CV (FLOW CAPACITY)	18.9
FLUID	Liquids and Gases See materials section
TEMPERATURE RANGE	See Product Selector opposite and Technical Data section
PORT SIZE	1¼"
CRACKING PRESSURE	0.1 - 0.3 bar (2 - 5 psi)
WEIGHT	2.2 kg (4.8 lb)

Specifications may change without notice

Materials


Externally Exposed Parts: 316 stainless steel.

Internally Wetted Parts: 316 and 302 stainless steel.

The standard valve is designed for use with air, nitrogen, mineral oil, water glycols and plain water and may also be used with a wide variety of media compatible with the materials of construction.


⚠ The standard valve has Viton® seals. Further seal options are available via the Product Selector. Compatibility with the working fluid at the operating temperature must be considered.

Typical Performance

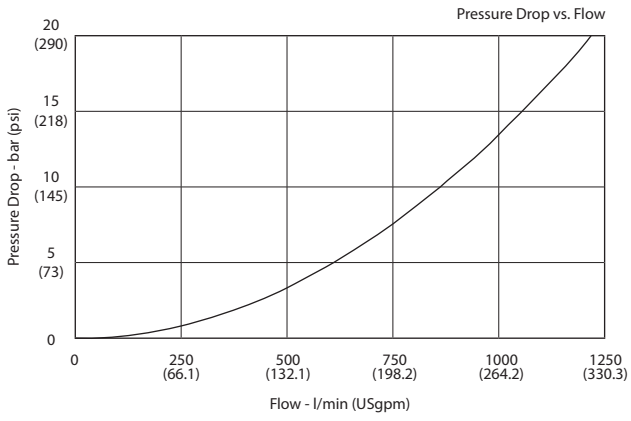

Typical performance based on water

Installation Diagram

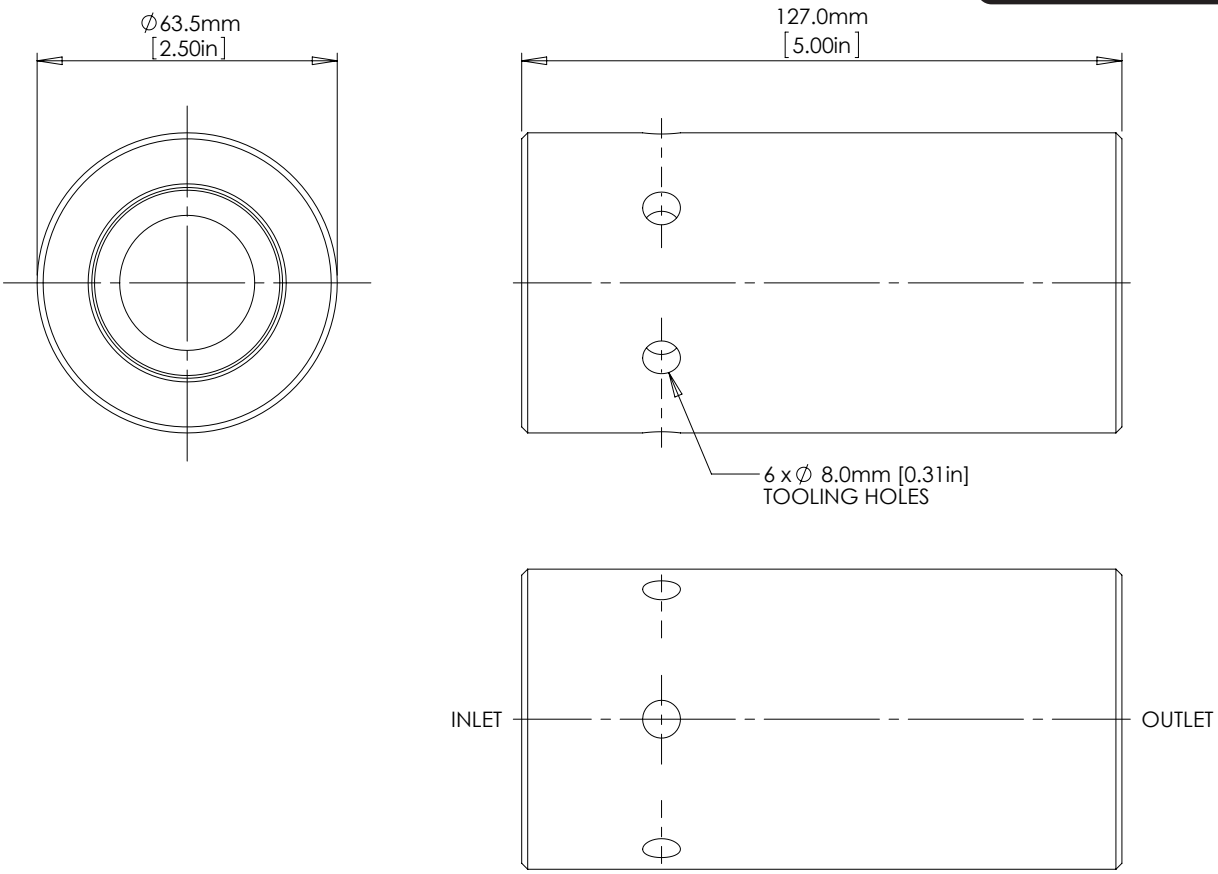

Product Selector

C125 P - NBR - 7K

VALVE TYPE	PORTING OPTIONS	SEAL OPTIONS	MAX WORKING PRESSURE
C125	P 1¼" BSPP female N 1¼" NPT female	Leave blank for Viton® seals -10˚C to +120˚C NBR Nitrile seals -30˚C to +105˚C EP EPDM seals -45˚C to +150˚C KLZ Kalrez® seals -25˚C to +200˚C HNBR Hydrogenated Nitrile seals -20˚C to +150˚C Further seal options are available on request	7K 483 bar (7,000 psi) Liquid 241 bar (3,500 psi) Gas

Repair and seal kits are available on request

For a seal kit add SK at the end of the model code and for a repair kit add RK