
C37

CHECK VALVE


3/8″ UP TO 621 BAR 9,000 PSI




The C37 is a 3/8″ nominal bore check valve. It will allow flow in one direction, and blocks flow in the opposite direction. It may also be referred to as a non-return valve.

The valve uses sealed poppet technology to give virtually zero leakage with liquids and gases.

- Check or Non-Return valve
- Stainless steel construction
- Sealed poppet design
- Virtually zero leakage
- Cost effective one piece body design
- Can be used subsea
- Suitable for liquid or gas
- Suitable for use with air, nitrogen, sweet natural gas, mineral oils and water glycols
- Various seal options available
- Various porting options available

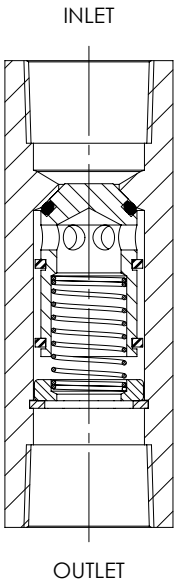

Specifications

BASIC MODEL NUMBER	C37
SYMBOL	
MAX WORKING PRESSURE (LIQUID)	621 bar (9,000 psi)
MAX WORKING PRESSURE (GAS)	241 bar (3,500 psi)
CV (FLOW CAPACITY)	1.3
FLUID	Liquids and Gases See materials section
TEMPERATURE RANGE	See Product Selector opposite and Technical Data section
PORT SIZE	3/8″
CRACKING PRESSURE	0.1 - 0.3 bar (2 - 5 psi)
WEIGHT	0.15 kg (0.3 lb)

Specifications may change without notice

Materials


Externally Exposed Parts: 316 stainless steel.

Internally Wetted Parts: 316, 302 and 420 stainless steel and acetal.

The standard valve is designed for use with air, nitrogen, sweet natural gas, mineral oil and water glycols and may also be used with a wide variety of media compatible with the materials of construction.

⚠ The standard valve has Viton® seals. Further seal options are available via the Product Selector. Compatibility with the working fluid at the operating temperature must be considered.


Typical Performance

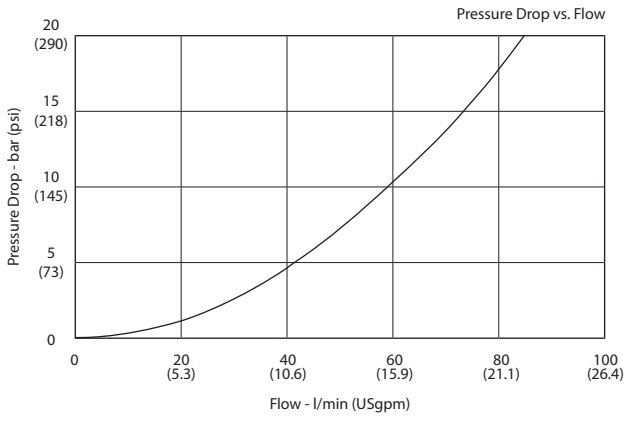

Typical performance based on water glycol

Installation Diagram



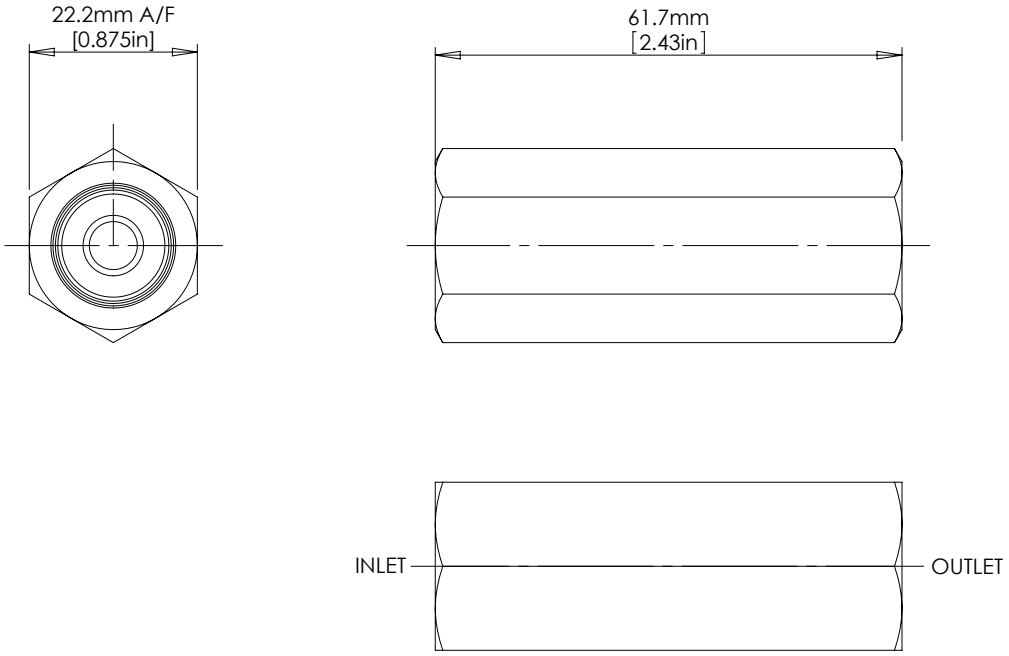

Product Selector

C37 P - NBR - 9K

VALVE TYPE	PORTING OPTIONS	SEAL OPTIONS	MAX WORKING PRESSURE
C37	P 3/8" BSPP female N 3/8" NPT female	Leave blank for Viton® seals -10˚C to +120˚C NBR Nitrile seals -30˚C to +105˚C EP EPDM seals -45˚C to +120˚C KLZ Kalrez® seals -25˚C to +120˚C HNBR Hydrogenated Nitrile seals -20˚C to +120˚C Further seal options are available on request	9K 621 bar (9,000 psi) Liquid 241 bar (3,500 psi) Gas

Repair and seal kits are available on request

For a seal kit add SK at the end of the model code and for a repair kit add RK