
CC100

CHECK VALVE

1″


UP TO 414 BAR 6,000 PSI




The CC100 is a 1″ nominal bore cartridge check valve. It will allow flow in one direction, and blocks flow in the opposite direction. It may also be referred to as a non-return valve.

The valve uses sealed poppet technology to give virtually zero leakage with liquids and gases.

- Check or Non-Return valve
- Cartridge design ideal for installation in manifold systems
- Internally threaded for easy extraction
- Stainless steel construction
- Sealed poppet design
- Virtually zero leakage
- Suitable for liquid or gas
- Suitable for use with air, nitrogen, sweet natural gas, mineral oils, water glycols, water and sea water
- Suitable for many other media, contact us for advice
- Various seal options available

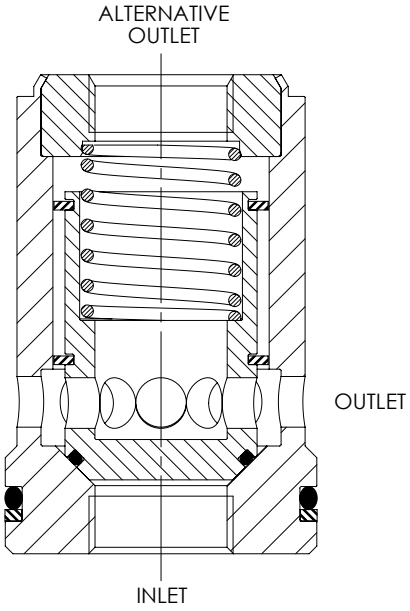

Specifications

BASIC MODEL NUMBER	CC100
SYMBOL	
MAX WORKING PRESSURE (LIQUID)	414 bar (6,000 psi)
MAX WORKING PRESSURE (GAS)	241 bar (3,500 psi)
CV (FLOW CAPACITY)	5.7
FLUID	Liquids and Gases See materials section
TEMPERATURE RANGE	See Product Selector opposite and Technical Data section
NOMINAL SIZE	1″
CRACKING PRESSURE	0.2 - 0.4 bar (3 - 7 psi)
WEIGHT	0.4 kg (0.9 lb)

Specifications may change without notice


Materials

316 stainless steel with 302 stainless steel spring, and acetal. The spring is inconel for SWD variants.

The standard valve is designed for use with air, nitrogen, sweet natural gas, mineral oil, water glycols and plain water, and may also be used with a wide variety of media compatible with the materials of construction.

⚠ The standard valve has Viton® seals. Further seal options are available via the Product Selector. Compatibility with the working fluid at the operating temperature must be considered.


Typical Performance

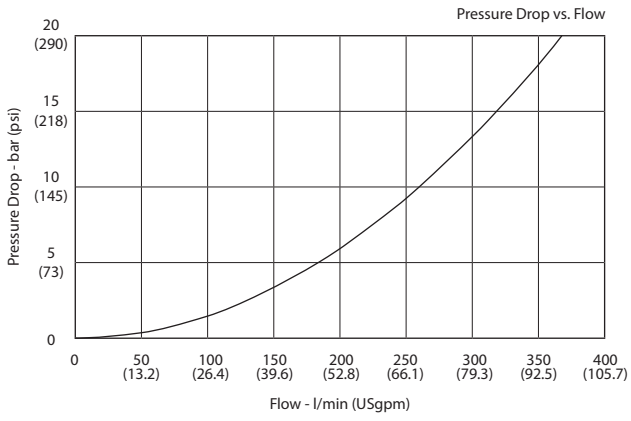


Typical performance based on water


Installation Diagram



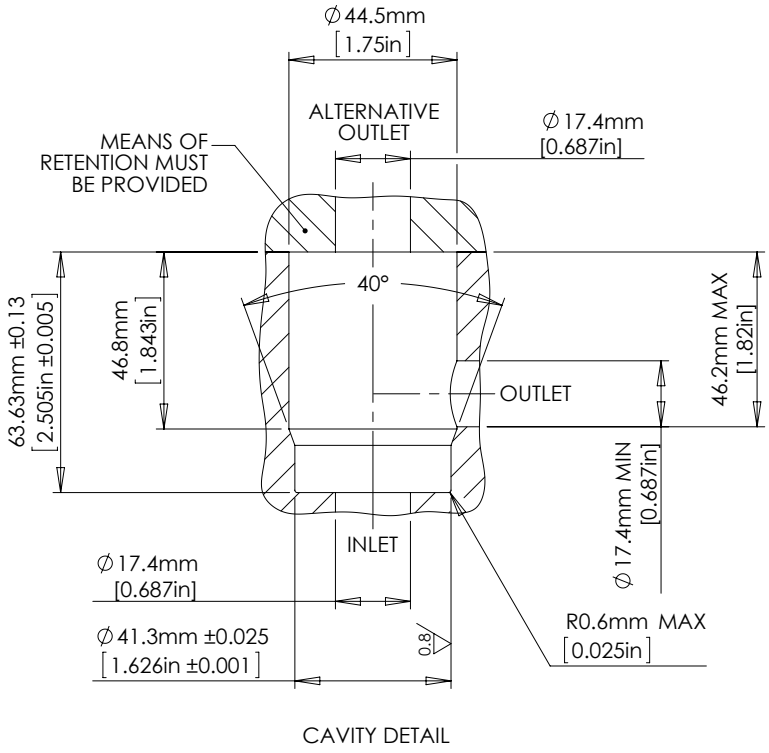

CAVITY DETAIL



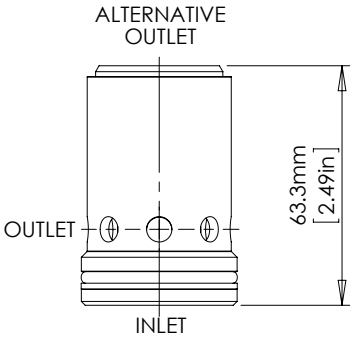

NOTE: CONTACT BIS FOR DETAILS OF CAVITY WITH THREADED PLUG RETENTION.

Product Selector

CC100 - NBR - SWD - 6K

VALVE TYPE	SEAL OPTIONS	VALVE OPTIONS	MAX WORKING PRESSURE
CC100	Leave blank for Viton® seals -10˚C to +120˚C **NBR** Nitrile seals -30˚C to +105˚C **EP** EPDM seals -45˚C to +120˚C **KLZ** Kalrez® seals -25˚C to +120˚C **HNBR** Hydrogenated Nitrile seals -20˚C to +120˚C Further seal options are available on request	Leave blank if not required **SWD** Materials compatible with sea water	**6K** 414 bar (6,000 psi) Liquid 241 bar (3,500 psi) Gas The maximum working pressure of an installed valve is dependent on the housing design. Contact us for advice if in doubt regarding the suitability of any housing design

These valves are not internally serviceable. Seal kits containing external seals are available on request

For a seal kit add SK at the end of the model code