
CC37


CHECK VALVE

3/8″ UP TO 690 BAR 10,000 PSI




The CC37 is a 3/8″ nominal bore cartridge check valve. It will allow flow in one direction, and blocks flow in the opposite direction. It may also be referred to as a non-return valve.

The valve uses sealed poppet technology to give virtually zero leakage with liquids and gases.

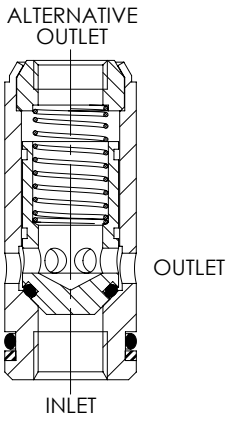

- Check or Non-Return valve
- Cartridge design ideal for installation in manifold systems
- Internally threaded for easy extraction
- Stainless steel construction
- Sealed poppet design
- Virtually zero leakage
- Suitable for liquid or gas
- Suitable for use with air, nitrogen, sweet natural gas, mineral oils, water glycols, water and sea water
- Suitable for many other media, contact us for advice
- Various seal options available

Specifications

BASIC MODEL NUMBER	CC37
SYMBOL	
MAX WORKING PRESSURE (LIQUID)	690 bar (10,000 psi)
MAX WORKING PRESSURE (GAS)	345 bar (5,000 psi)
CV (FLOW CAPACITY)	1.3
FLUID	Liquids and Gases See materials section
TEMPERATURE RANGE	See Product Selector opposite and Technical Data section
NOMINAL SIZE	3/8″
CRACKING PRESSURE	0.1 - 0.3 bar (2 - 5 psi)
WEIGHT	0.05 kg (0.11 lb)

Specifications may change without notice


Materials

316 stainless steel with 302 stainless steel spring, and acetal. The spring is inconel for SWD variants.

The standard valve is designed for use with air, nitrogen, sweet natural gas, mineral oil, water glycols and plain water, and may also be used with a wide variety of media compatible with the materials of construction.

⚠ The standard valve has Viton® seals. Further seal options are available via the Product Selector. Compatibility with the working fluid at the operating temperature must be considered.


Typical Performance

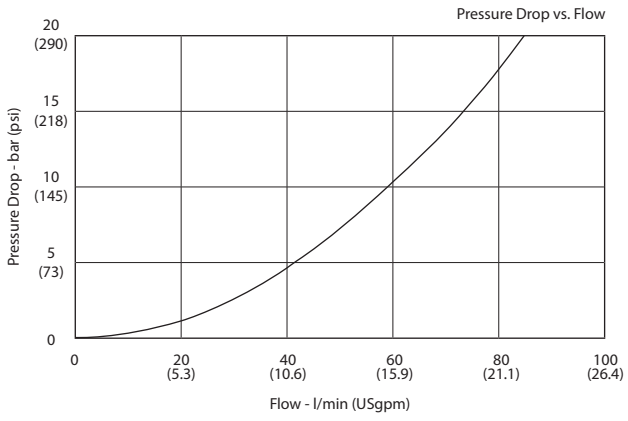



Typical performance based on water

Installation Diagram



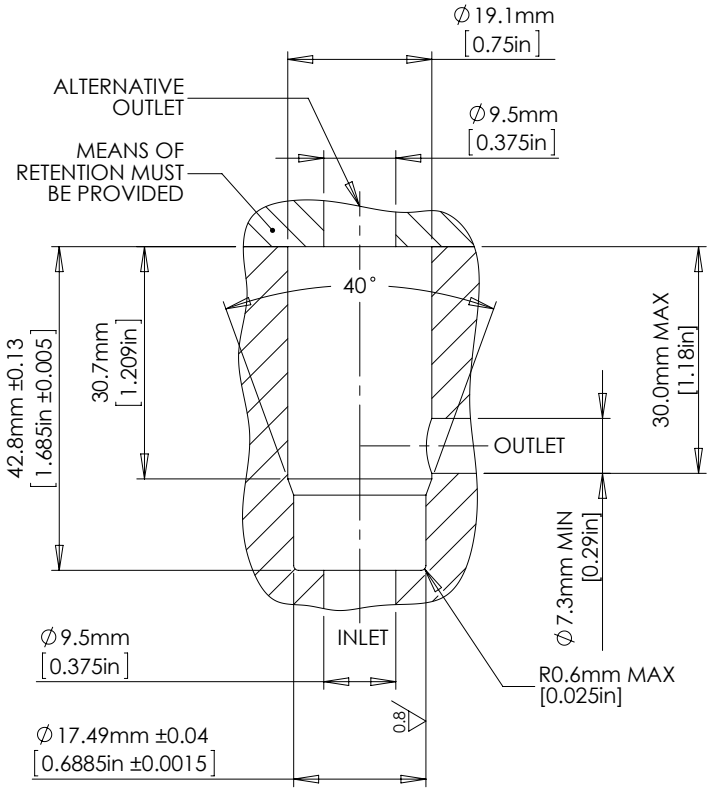

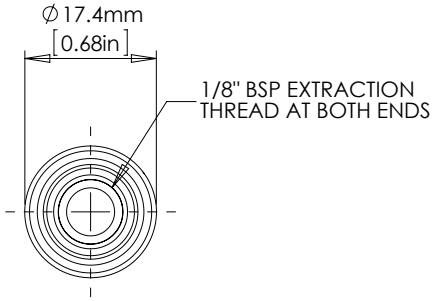

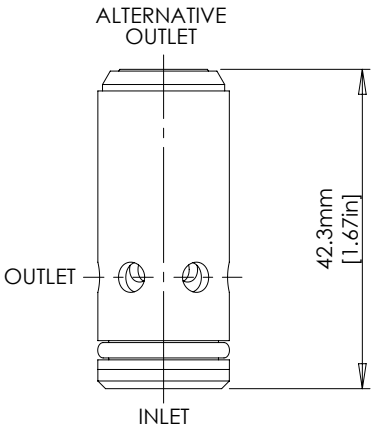

NOTE: CONTACT BIS FOR DETAILS OF CAVITY
WITH THREADED PLUG RETENTION.

Product Selector

CC37 - NBR - SWD - 10K

VALVE TYPE	SEAL OPTIONS	VALVE OPTIONS	MAX WORKING PRESSURE
CC37	Leave blank for Viton® seals -10˚C to +120˚C	Leave blank if not required	10K 690 bar (10,000 psi) Liquid
	NBR Nitrile seals -30˚C to +105˚C	SWD Materials compatible with sea water	345 bar (5,000 psi) Gas
	EP EPDM seals -45˚C to +120˚C		The maximum working pressure of an installed valve is dependent on the housing design. Contact us for advice if in doubt regarding the suitability of any housing design
	KLZ Kalrez® seals -25˚C to +120˚C		
	HNBR Hydrogenated Nitrile seals -20˚C to +120˚C		
These valves are not internally serviceable. Seal kits containing external seals are available on request For a seal kit add SK at the end of the model code	Further seal options are available on request		