
# CMF25

## METERING VALVE


**1/4"** UP TO 552 BAR 8,000 PSI



The CMF25 is a 1/4" nominal bore metering valve with a reverse free-flow check function. It provides metered flow in one direction, and free flow in the opposite direction, ideal for uni-directional speed control of a cylinder or actuator.

The valve can be adjusted manually after installation, and the setting can be locked. Note that this is a flow control valve and is not intended to provide tight shut-off when closed.

- Metering valve with reverse free-flow check feature
- Micrometer style adjustment with engraved graduations
- Non-rotating valve stem with lockable adjustment
- Ideal for uni-directional speed control
- Stainless steel construction suitable for liquid or gas
- Can be panel mounted
- Suitable for use with air, nitrogen, sweet natural gas, mineral oils, water glycols and many other media
- NACE MR01-75 compliant version available
- Various porting options available. Manifold mounted version available on request
- Various seal options available on request

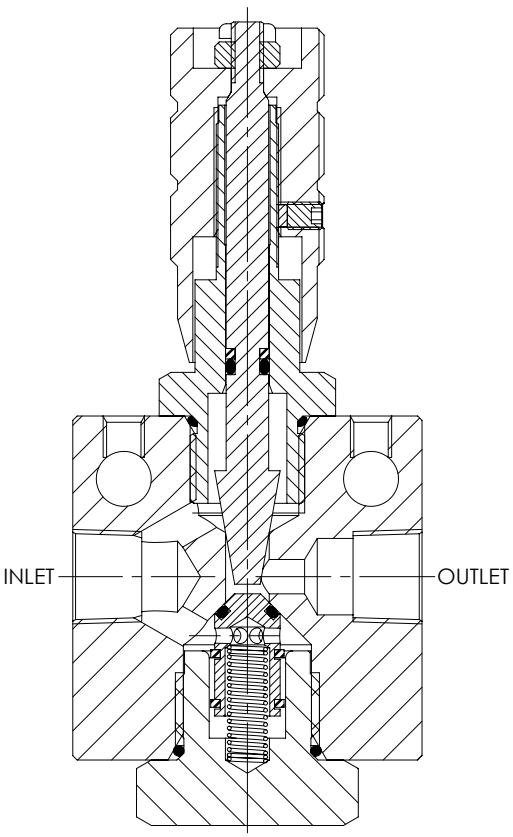


## Specifications

| BASIC MODEL NUMBER | CMF25 |
|---|---|
| SYMBOL | INLET (METERED) — OUTLET (FREE FLOW) |
| MAX WORKING PRESSURE (LIQUID) | 552 bar (8,000 psi) |
| MAX WORKING PRESSURE (GAS) | 276 bar (4,000 psi) |
| CV (FLOW CAPACITY) | Up to 0.62 See Typical Performance Graph |
| FLUID | Liquids and Gases See materials section |
| TEMPERATURE RANGE | See Product Selector opposite and Technical Data section |
| PORT SIZE | 1/4" |
| CHECK ELEMENT CRACKING PRESSURE | 0.2 - 0.5 bar (3 - 7 psi) |
| WEIGHT | 0.70 kg (1.5 lb) |

Specifications may change without notice

## Materials


Externally Exposed Parts: 316, 302 and 17-4 PH stainless steel.

Internally Wetted Parts: 316, 302 and 17-4 PH stainless steel, and acetal.

The standard valve is designed for use with air, nitrogen, sweet natural gas, mineral oil, water glycols and plain water, but may be used with a wide variety of media compatible with the materials of construction. Other material options are available and for further advice, please contact us.


⚠ The standard valve has Viton® seals. Further seal options are available via the Product Selector. Compatibility with the working fluid at the operating temperature must be considered.


## Typical Performance

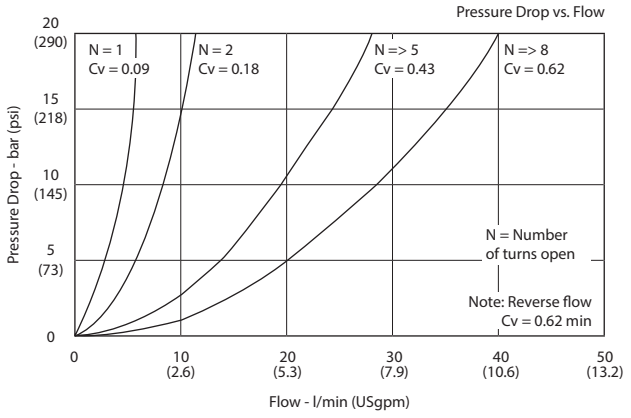


Typical performance based on water glycol

## Installation Diagram



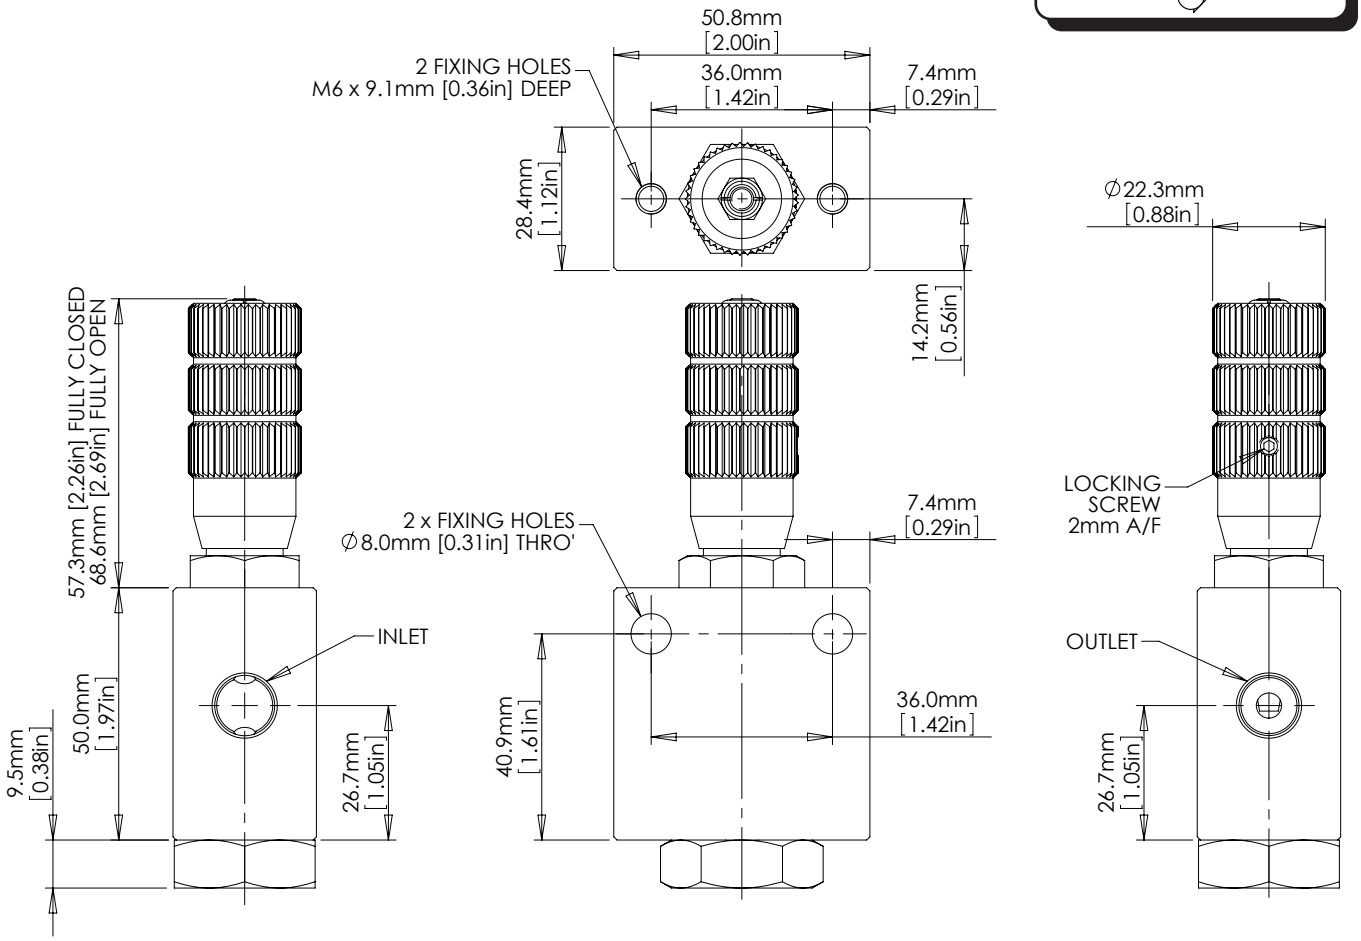


## Product Selector

CMF25 P - NBR - 8K

| VALVE TYPE | PORTING OPTIONS | SEAL OPTIONS | MAX WORKING PRESSURE |
|---|---|---|---|
| CMF25 | P<br>1/4" BSPP female<br><br>N<br>1/4" NPT female | Leave blank for Viton® seals<br>-10˚C to +120˚C<br><br>NBR<br>Nitrile seals<br>-30˚C to +105˚C<br><br>EP<br>EPDM seals<br>-45˚C to +120˚C<br><br>KLZ<br>Kalrez® seals<br>-25˚C to +120˚C<br><br>HNBR<br>Hydrogenated Nitrile seals<br>-20˚C to +120˚C<br><br>Further seal options are available on request<br><br>⚠ Exposure to high and low fluid temperatures will influence handle temperature. Operator safety must be considered. | 8K<br>552 bar<br>(8,000 psi)<br>Liquid<br><br>276 bar<br>(4,000 psi)<br>Gas |

Repair and seal kits are available on request

For a seal kit add SK at the end of the model code and for a repair kit add RK