
DF50

DUPLEX FILTER


1/2" UP TO 414 BAR 6,000 PSI




The DF50 is a 1/2" nominal bore duplex main line filter. The filter can be manually switched to filter through one element at a time. This allows for system maintenance without any downtime.

The filter is available in various micron ratings. It can also be supplied with various differential pressure indicators, with and without by-pass facilities.

- Stainless Steel Construction
- No need for downtime whilst an element is being changed
- Various differential pressure indicator options available
- Various micron ratings available
- High flow version available
- Bypass option available
- Various seal options available
- Various porting options available

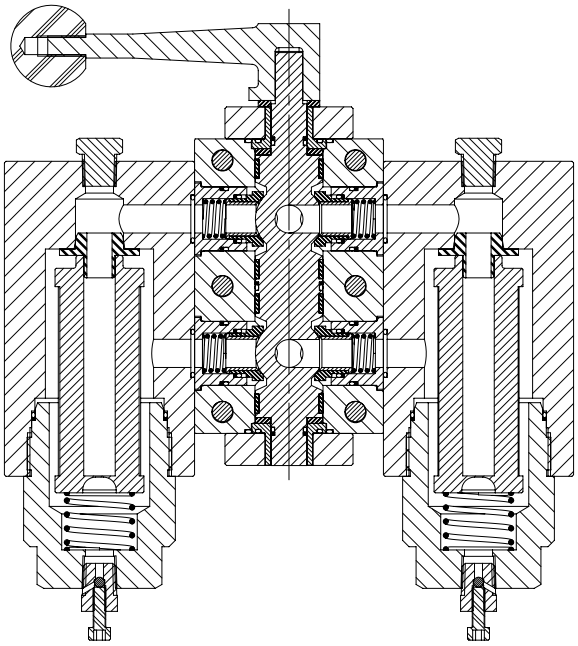

Specifications

BASIC MODEL NUMBER	DF50
SYMBOL	
MAX WORKING PRESSURE	414 bar (6,000 psi)
CV (FLOW CAPACITY)	2.37 / 2.97
FLUID	Liquids only See materials section
MICRON RATING	3, 5, 10, 20 & 50
DIFFERENTIAL PRESSURE INDICATOR	3, 5 & 7 bar (44, 73 & 102 psi)
TEMPERATURE RANGE	See Product Selector opposite and Technical Data section
PORT SIZE	1/2"
WEIGHT	20.7 kg (45.6 lb)

Specifications may change without notice

Materials

Externally Exposed Parts: 316 and 304 Stainless Steel.


Internally Wetted Parts: 316, 302 and acetal.


The standard filter is designed for use with mineral oils and water glycols and may be used with a wide variety of media of media compatible with the materials of construction. The filter is not designed for use with gases.

⚠ The standard valve has Viton® seals. Further seal options are available via the Product Selector. Compatibility with the working fluid at the operating temperature must be considered.

Typical Performance

Configuration Diagram



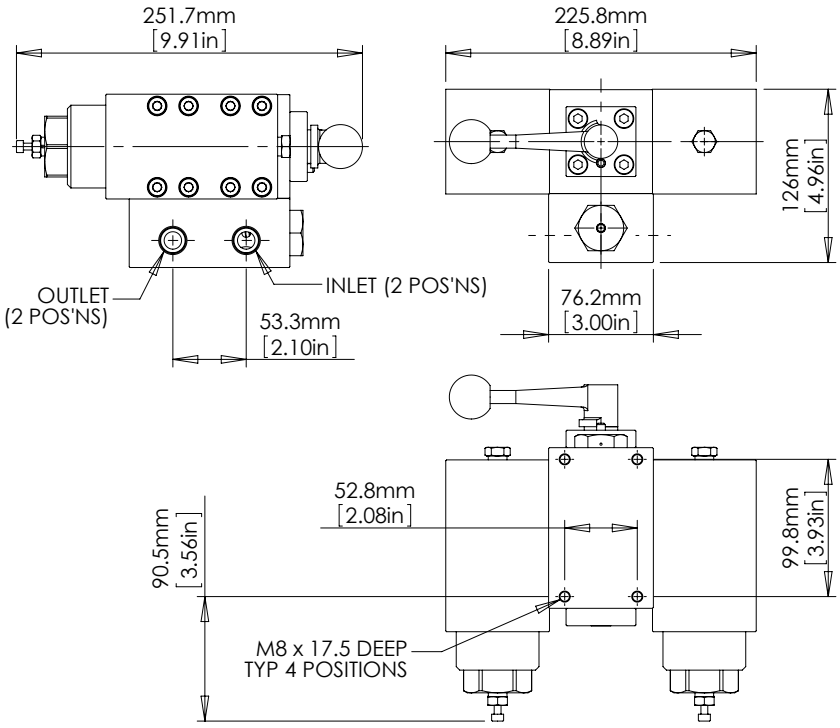

Product Selector

DF50 P - 3M - DP3 - HF - NBR - 6K

VALVE TYPE	PORTING OPTIONS	NOMINAL FILTER RATING	INDICATOR TYPE AND PRESSURE	FLOW RANGE	SEAL OPTIONS	MAX WORKING PRESSURE
			Leave blank if not required	Leave blank if not required	Leave blank for Viton® seals -10˚c to +110˚c	
DF50	P 1/2" BSPP female N 1/2" NPT female	3M 3 microns 5M 5 microns 10M 10 microns 20M 20 microns 50M 50 microns	DP3 Visual 'pop out' 3 bar delta P DP5 Visual 'pop out' 5 bar delta P DP7 Visual 'pop out' 7 bar delta P BP3 Visual 'pop out' 3 bar delta P with by-pass BP5 Visual 'pop out' 5 bar delta P with by-pass BP7 Visual 'pop out' 7 bar delta P with by-pass	HF High flow version	NBR Nitrile seals -30˚c to +105˚c EP EPDM seals -45˚c to +110˚c KLZ Kalrez® seals -25˚c to +110˚c HNBR Hydrogenated Nitrile seals -20˚c to +110˚c Further seal options are available on request	6K 414 bar (6,000 psi) Liquid

Repair and seal kits are available on request

For a seal kit add SK at the end of the model code and for a repair kit add RK

DF50

DUPLEX MAIN LINE FILTER



