
EF50-DP

INLINE FILTER

1/2″


UP TO 552 BAR 8,000 PSI

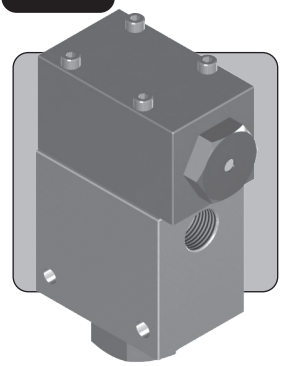


The EF50-DP is an inline filter, intended for protection of critical system components such as contaminant sensitive valves, as an addition to main system filtration.

The rigid mesh stainless steel filter elements offer a high collapse rating and are available in a number of nominal filtration sizes, ranging from 2.5 to 200 microns.

- Cost effective solution for protection of sensitive system components
- 316 Stainless steel construction
- Rigid mesh elements with high differential pressure ratings
- Supplements main system filtration
- Can be used subsea
- Suitable for liquid or gas
- Suitable for use with air, nitrogen, sweet natural gas, mineral oils, water glycols, water and sea water
- Suitable for many other media, contact us for advice
- Various seal options available
- Various porting options available

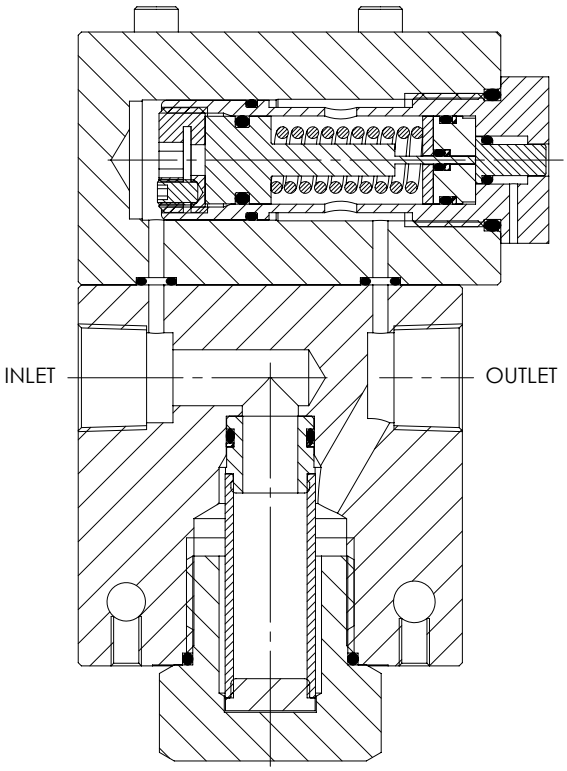

Specifications

BASIC MODEL NUMBER	EF50-DP
SYMBOL	
MAX WORKING PRESSURE (LIQUID)	552 bar (8,000 psi)
MAX WORKING PRESSURE (GAS)	276 bar (4,000 psi)
MAX DIFFERENTIAL PRESSURE	7 bar (102 psi)
FILTER AREA	29.0 cm^2 (4.5 sq. ins)
FLUID	Liquids and Gases See materials section
TEMPERATURE RANGE	See Product Selector opposite and Technical Data section
PORT SIZE	1/2″
WEIGHT	4.1 kg (9.0 lb)

Specifications may change without notice

Materials

Externally Exposed Parts: 316 stainless steel.


Internally Wetted Parts: 316 stainless steel and acetal.


The standard valve is designed for use with air, nitrogen, sweet natural gas, mineral oil, water glycols and plain water, and may also be used with a wide variety of media compatible with the materials of construction.

⚠ The standard valve has Viton® seals. Further seal options are available via the Product Selector. Compatibility with the working fluid at the operating temperature must be considered.

Typical Performance

Installation Diagram



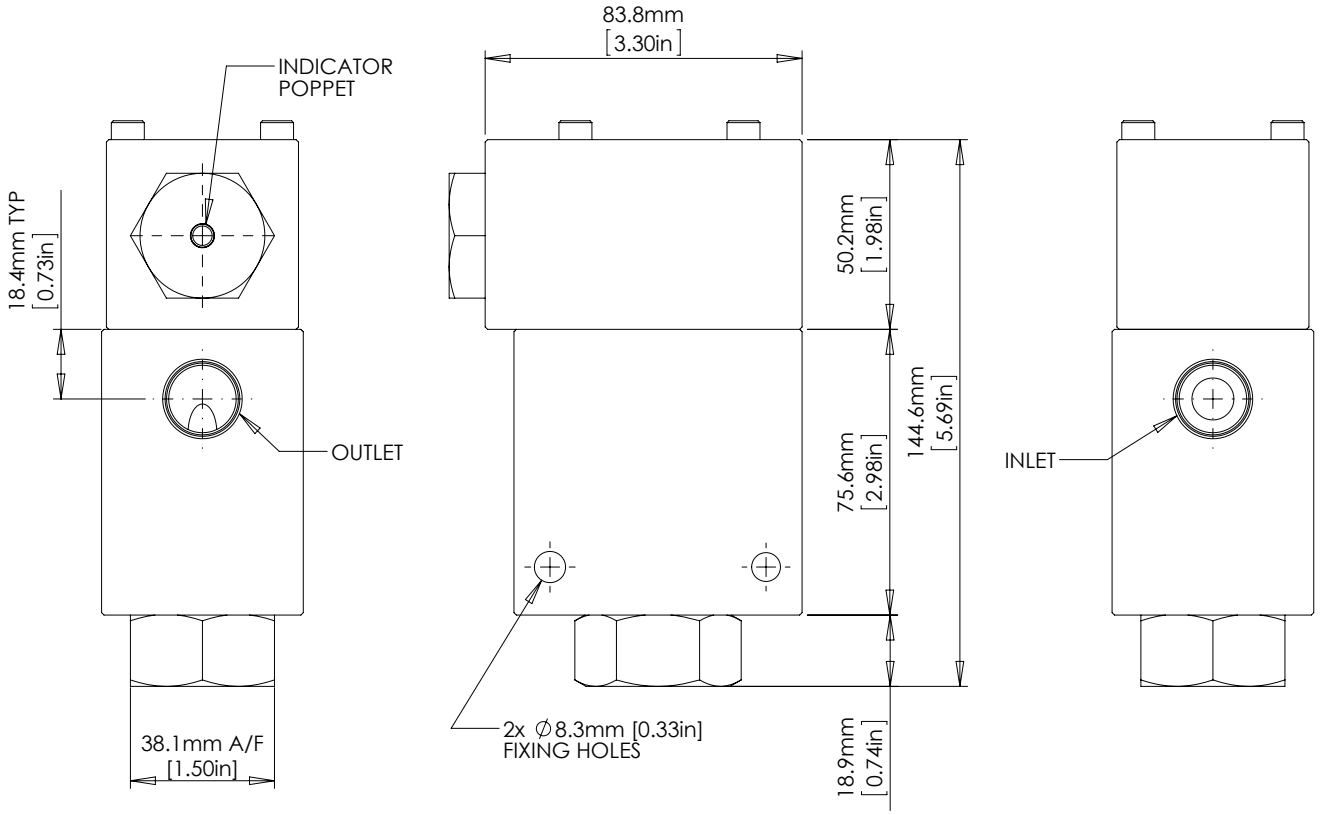

Product Selector

EF50-DP P - 2.5M - NBR - 8K

VALVE TYPE	PORTING OPTIONS	NOMINAL FILTER RATING	SEAL OPTIONS	MAX WORKING PRESSURE
EF50-DP	P 1/2" BSPP female N 1/2" NPT female	2.5M 2.5 microns 5M 5 microns 10M 10 microns 20M 20 microns 50M 50 microns 100M 100 microns 200M 200 microns	Leave blank for Viton® seals -10˚c to +120˚c NBR Nitrile seals -30˚c to +105˚c EP EPDM seals -45˚c to +120˚c KLZ Kalrez® seals -25˚c to +120˚c HNBR Hydrogenated Nitrile seals -20˚c to +120˚c Further seal options are available on request	8K 552 bar (8,000 psi) Liquid 276 bar (4,000 psi) Gas

Repair and seal kits are available on request

For a seal kit add SK at the end of the model code and for a repair kit add RK