ER37


EXCESS FLOW VALVE

3/8″ UP TO 414 BAR 6,000 PSI


The ER37 is a 3/8″ stainless steel excess flow valve with external adjustment, for use at pressures up to 6,000 psi with liquid and 4,000 psi with gas.



Externally adjustable excess flow shut-off.

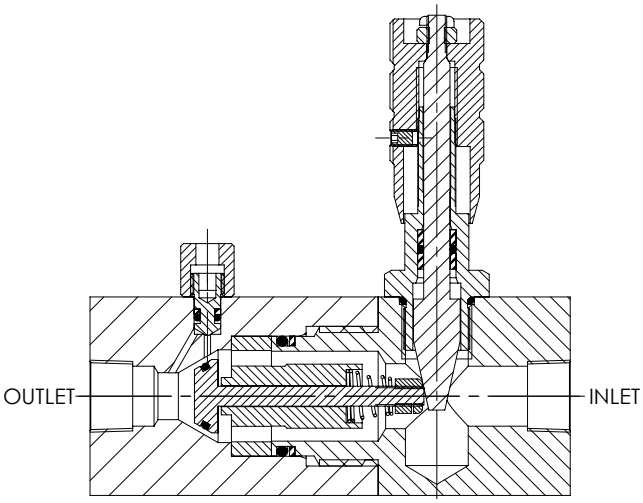

Specifications

BASIC MODEL NUMBER	ER37
SYMBOL	
MAX WORKING PRESSURE (LIQUID)	414 bar (6,000 psi)
MAX WORKING PRESSURE (GAS)	276 bar (4,000 psi)
DIFFERENTIAL SWITCHING PRESSURE	0.5 - 1.0 bar (7 - 14 psi)
FLUID	Liquids and Gases See materials section
TEMPERATURE RANGE	See Product Selector opposite and Technical Data section
PORT SIZE	3/8″
WEIGHT	1.75 kg (3.9 lb)

Specifications may change without notice

Materials


Externally Exposed Parts: 316 stainless steel.
Internally Wetted Parts: 316 and 302 stainless steel.


The valve is designed for use with air, nitrogen and plain water, but may be exposed directly to sea water externally. Note that use with water above 100°C is not recommended. Other media compatible with the materials of construction may be used, although consideration must be given to to the safety of such fluids when vented to atmosphere.


⚠ The standard valve has Viton® seals. Further seal options are available via the Product Selector. Compatibility with the working fluid at the operating temperature must be considered.

Typical Performance

Installation Diagram



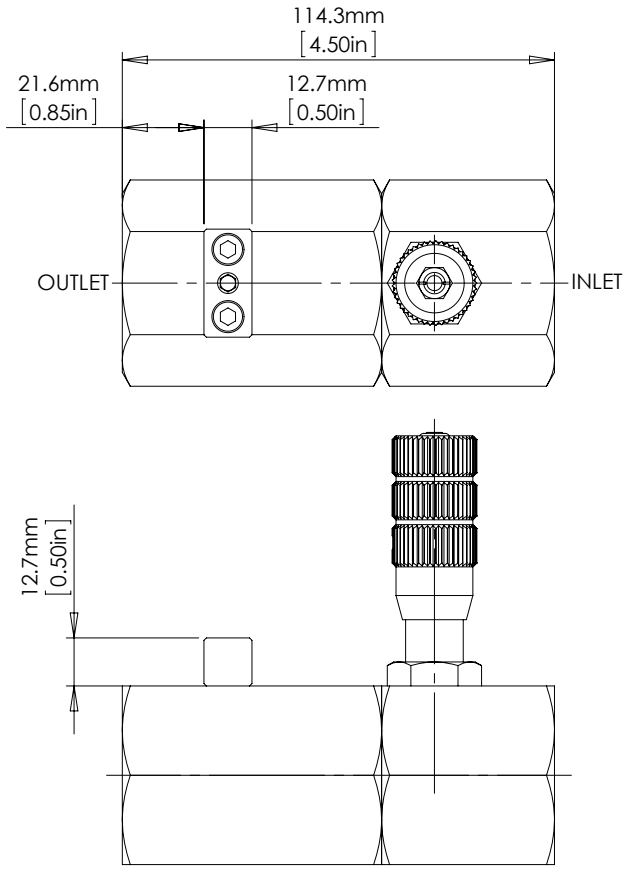

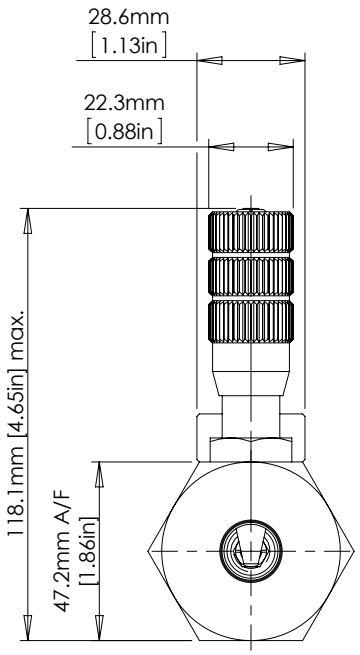

Product Selector

ER37 P - MR - LF - NBR - 6K

VALVE TYPE	PORTING OPTIONS	RESET OPTIONS	FLOW RANGE	SEAL OPTIONS	CRACKING PRESSURE
ER37	P 3/8" BSPP female N 3/8" NPT female	MR Manual re-set AR Auto re-set NR Non re-set	LF Low flow HF High flow	Leave blank for Viton® seals -10˚c to +120˚c NBR Nitrile seals -30˚c to +105˚c EP EPDM seals -45˚c to +120˚c KLZ Kalrez® seals -25˚c to +120˚c HNBR Hydrogenated Nitrile seals -20˚c to +120˚c Further seal options are available on request	6K 414 bar (6,000 psi) Liquid 276 bar (4,000 psi) Gas

Repair and seal kits are available on request

For a seal kit add SK at the end of the model code and for a repair kit add RK