
# F25

## INLINE FILTER

1/4"


UP TO 828 BAR 12,000 PSI




The F25 is an inline filter, intended for protection of critical system components such as contaminant sensitive valves, as an addition to main system filtration.

The rigid mesh stainless steel filter elements offer a high collapse rating and are available in a number of nominal filtration sizes, ranging from 2.5 to 200 microns.

- Cost effective solution for protection of sensitive system components
- 316 Stainless steel construction
- Rigid mesh elements with high differential pressure ratings
- Supplements main system filtration
- Can be used subsea
- Suitable for liquid or gas
- Suitable for use with air, nitrogen, sweet natural gas, mineral oils, water glycols, water and sea water
- Suitable for many other media, contact us for advice
- Various seal options available
- Various porting options available

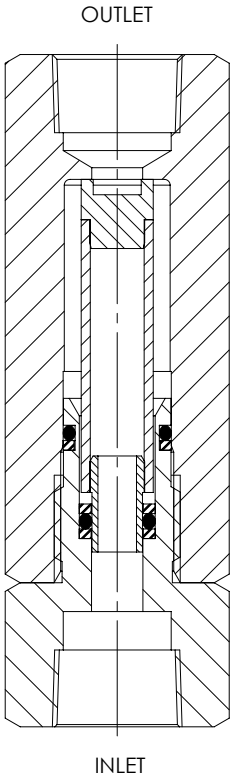


## Specifications

| BASIC MODEL NUMBER | F25 |
|---|---|
| SYMBOL |  |
| MAX WORKING PRESSURE (LIQUID) | 828 bar (12,000 psi) |
| MAX WORKING PRESSURE (GAS) | 690 bar (10,000 psi) |
| MAX DIFFERENTIAL PRESSURE | 20 bar (290 psi) |
| FILTER AREA | 6.4 $cm^2$ (1.0 sq. ins) |
| FLUID | Liquids and Gases See materials section |
| TEMPERATURE RANGE | See Product Selector opposite and Technical Data section |
| PORT SIZE | 1/4" |
| WEIGHT | 0.35 kg (0.77 lb) |

Specifications may change without notice

## Materials

Externally Exposed Parts: 316 stainless steel.

Internally Wetted Parts: 316 stainless steel and acetal.


The standard valve is designed for use with air, nitrogen, sweet natural gas, mineral oil, water glycols and plain water, and may also be used with a wide variety of media compatible with the materials of construction.


⚠ The standard valve has Viton® seals. Further seal options are available via the Product Selector. Compatibility with the working fluid at the operating temperature must be considered.

## Typical Performance

Typical performance based on water

## Installation Diagram



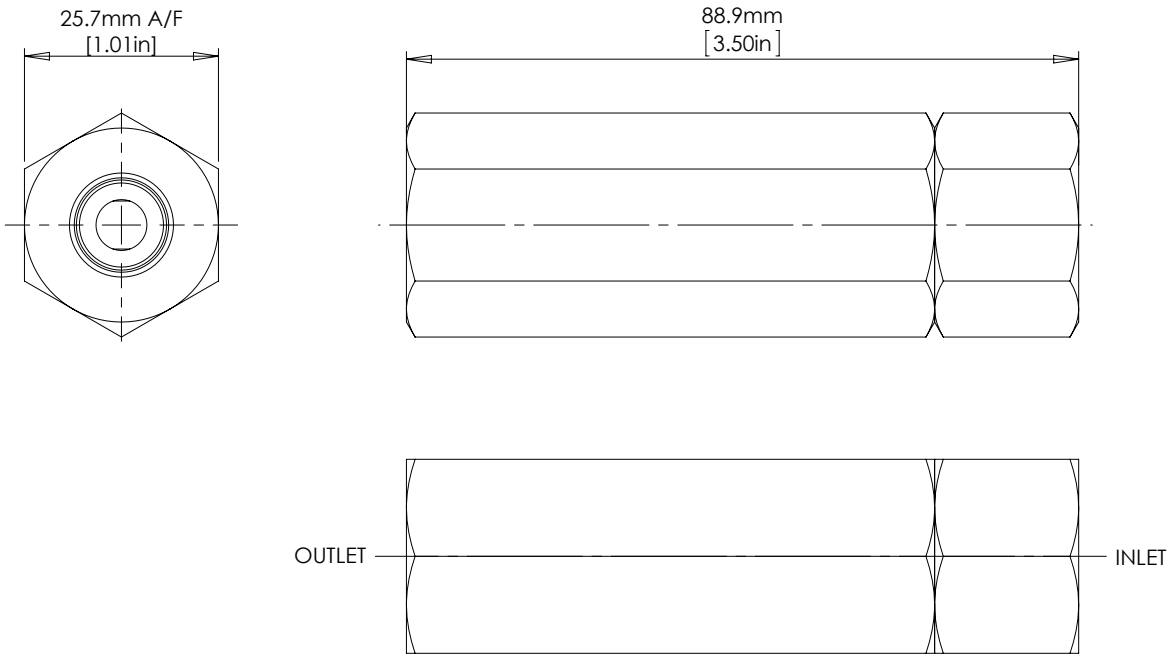


## Product Selector

F25 P - 2.5M - NBR - 12K

| VALVE TYPE | PORTING OPTIONS | NOMINAL FILTER RATING | SEAL OPTIONS | MAX WORKING PRESSURE |
|---|---|---|---|---|
| F25 | P<br>1/4" BSPP female<br><br>N<br>1/4" NPT female | 2.5M<br>2.5 microns<br><br>5M<br>5 microns<br><br>10M<br>10 microns<br><br>20M<br>20 microns<br><br>50M<br>50 microns<br><br>100M<br>100 microns<br><br>200M<br>200 microns | Leave blank for Viton® seals<br>-10˚c to +120˚c<br><br>NBR<br>Nitrile seals<br>-30˚c to +105˚c<br><br>EP<br>EPDM seals<br>-45˚c to +120˚c<br><br>KLZ<br>Kalrez® seals<br>-25˚c to +120˚c<br><br>HNBR<br>Hydrogenated Nitrile seals<br>-20˚c to +120˚c<br><br>Further seal options are available on request | 12K<br>828 bar<br>(12,000 psi)<br>Liquid<br><br>690 bar<br>(10,000 psi)<br>Gas |

Repair and seal kits are available on request

For a seal kit add SK at the end of the model code and for a repair kit add RK