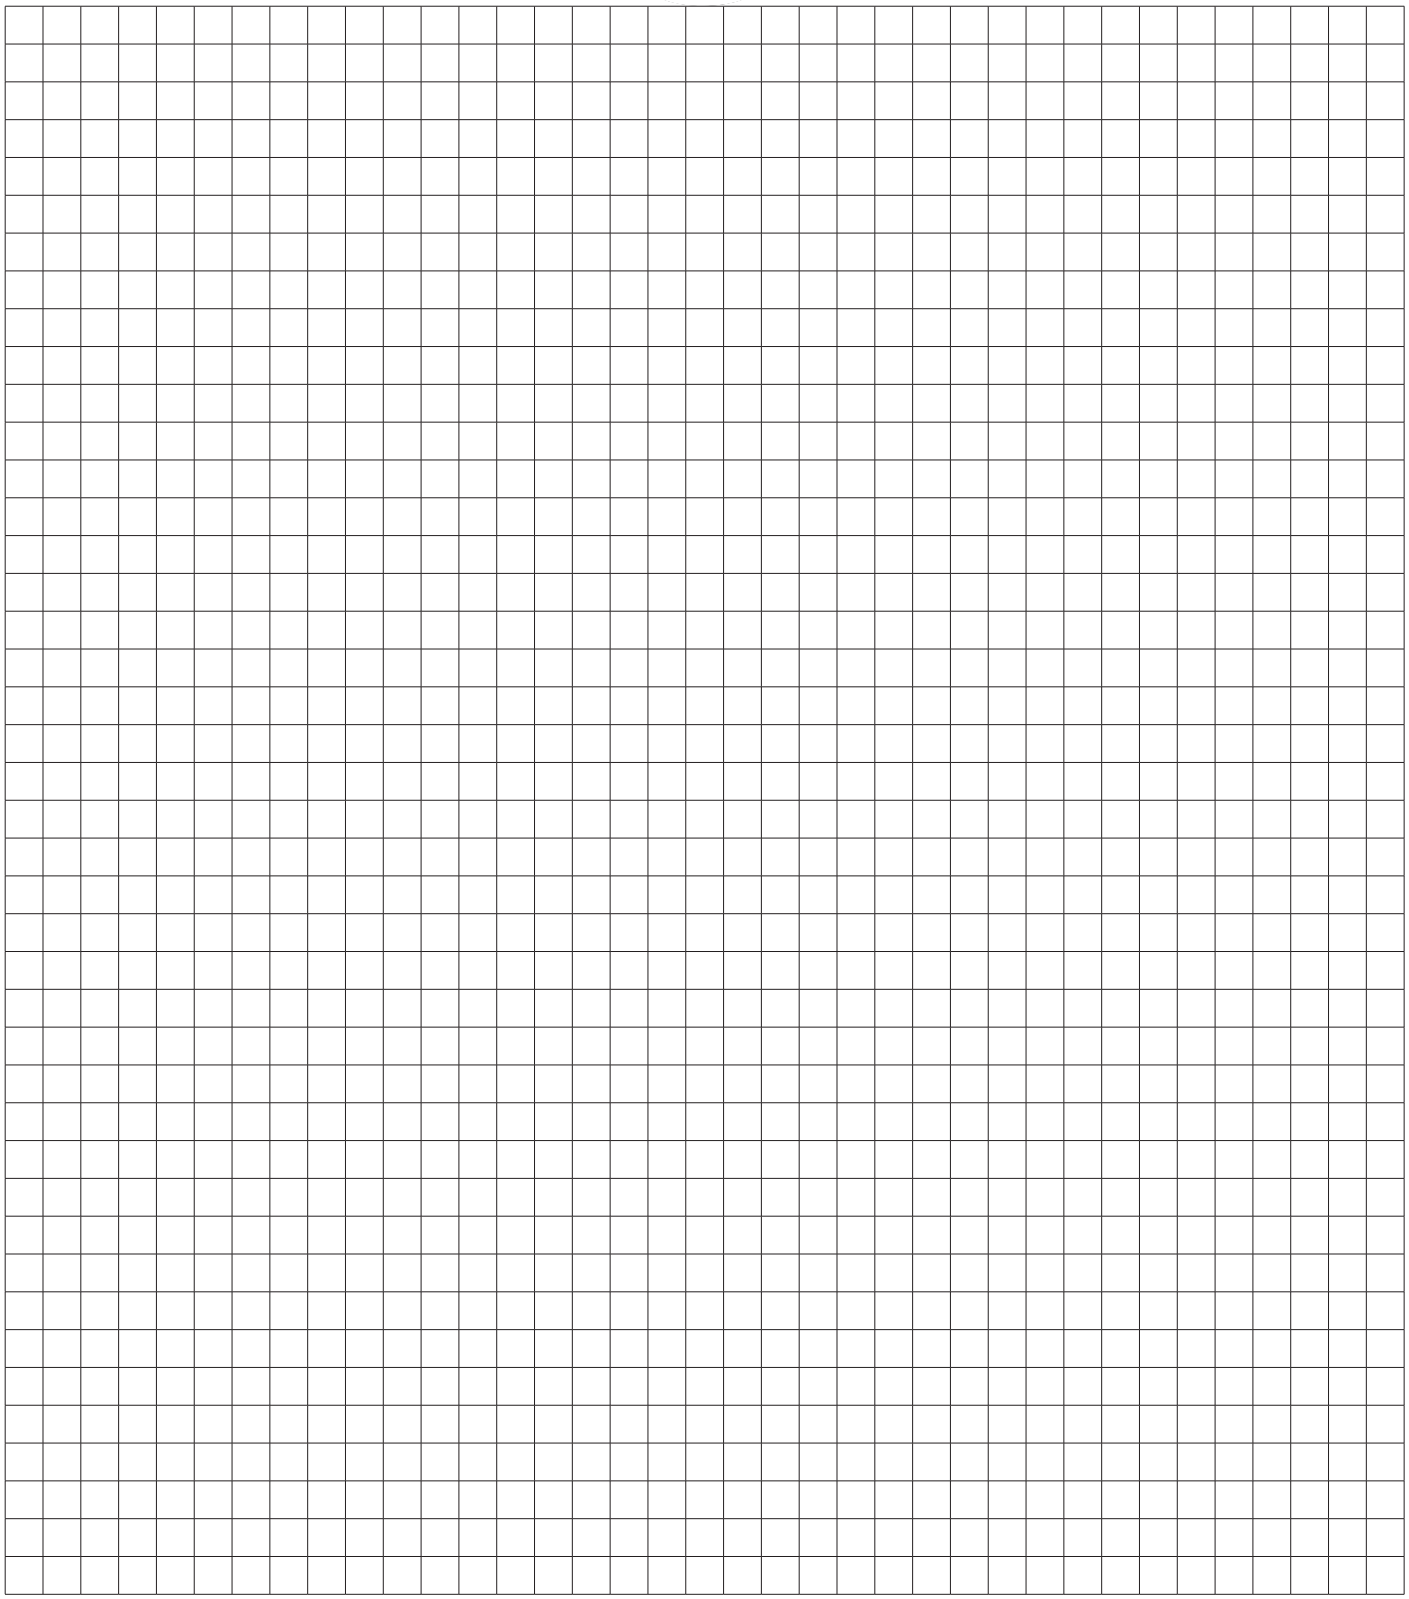


Superb service, product quality and the pursuit of innovative design

Filters
Overview

Benefits Checklist

Protects seats and downstream components from rogue debris.

Inline, simplex and duplex formats from small strainers to main-line units.

Rigid mesh elements with high collapse ratings and a wide micron range.

316 stainless steel construction with liquid and gas pressure ratings.

Subsea-capable designs and a range of seals and port options.

Function


Removes contamination from process streams to protect valves and other components.

Key features


Elements from 2.5 to 200 microns; selected F-series types reach 828 bar (12,000 psi) with liquid.

Applications


Air, gas, mineral oil, water glycol, water and seawater systems requiring debris protection.




Inline filters Pages ??-??



Inline filters (easy replacement) Pages ??-??



Simplex filters Pages ??-??



Duplex filters Pages ??-??

	Nominal Size	Pressure	Media	Valve Type	Page
Inline filters	1/4″	828 bar (12,000 psi)*	Liquids & Gases	F25	?
	3/8″	828 bar (12,000 psi)*	Liquids & Gases	F37	?
	1/2″	828 bar (12,000 psi)*	Liquids & Gases	F50	?
	3/4″	828 bar (12,000 psi)*	Liquids & Gases	F75	?
	1″	621 bar (9,000 psi)*	Liquids & Gases	F100	?
	1¼″	414 bar (6,000 psi)*	Liquids & Gases	F125	?
	1½″	414 bar (6,000 psi)*	Liquids & Gases	F150	?
	2″	414 bar (6,000 psi)*	Liquids & Gases	F200	?
Inline filters (easy replacement)	1/4″	552 bar (8,000 psi)*	Liquids & Gases	EF25	?
	3/8″	552 bar (8,000 psi)*	Liquids & Gases	EF37	?
	1/2″	552 bar (8,000 psi)*	Liquids & Gases	EF50	?
	1/2″	552 bar (8,000 psi)*	Liquids & Gases	EF50-DP	?
	1″	552 bar (8,000 psi)*	Liquids & Gases	EF100	?
Simplex filters	1/2″	414 bar (6,000 psi)	Liquids only	SF50	?
Duplex filters	1/2″	414 bar (6,000psi)	Liquids only	DF50	?

* NOTE - Pressure rating is reduced with gases