
# FMF25

## METERING VALVE


**1/4"** UP TO 552 BAR 8,000 PSI




The FMF25 is a 1/4" nominal bore fine flow metering valve, adjustable via a micrometer style handle. The valve is marked with a preferred direction of flow, but it may be used in the opposite direction to provide bi-directional speed control of a cylinder or actuator, although the level of metering will vary depending on direction.

Note that this valve is not intended to provide tight shut-off when closed.

- Fine flow control valve for metering applications
- Micrometer style adjustment with engraved graduations
- Lockable adjustment
- Non-rotating valve stem protects valve seat
- Suitable for short term subsea use
- Suitable for liquid or gas
- Suitable for use with air, nitrogen, sweet natural gas, mineral oils, water glycols and plain water
- Suitable for many other media. Contact us for advice
- Cartridge and manifold mount versions available. Contact us for advice
- Various porting and seal options available

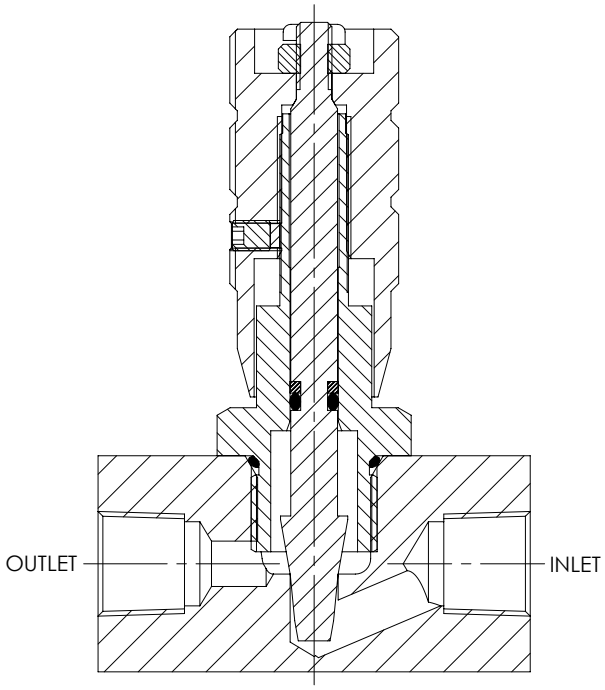


## Specifications

| BASIC MODEL NUMBER | FMF25 |
|---|---|
| SYMBOL |  |
| MAX WORKING PRESSURE (LIQUID) | 552 bar (8,000 psi) |
| MAX WORKING PRESSURE (GAS) | 276 bar (4,000 psi) |
| CV (FLOW CAPACITY) | Up to 0.65 See Typical Performance Graph |
| FLUID | Liquids and Gases See materials section |
| TEMPERATURE RANGE | See Product Selector opposite and Technical Data section |
| PORT SIZE | 1/4" |
| WEIGHT | 0.45 kg (1.0lb) |



Specifications may change without notice

## Materials


Externally Exposed Parts: 316, 304 and 17-4 PH stainless steel.

Internally Wetted Parts: 316 and 17-4 PH stainless steel and PTFE.

The standard valve is designed for use with air, nitrogen, sweet natural gas, mineral oil, water glycols and plain water and may also be used with a wide variety of media compatible with the materials of construction. Other material options are available. Contact us for advice.


⚠ The standard valve has Viton® seals. Further seal options are available via the Product Selector. Compatibility with the working fluid at the operating temperature must be considered.

## Typical Performance

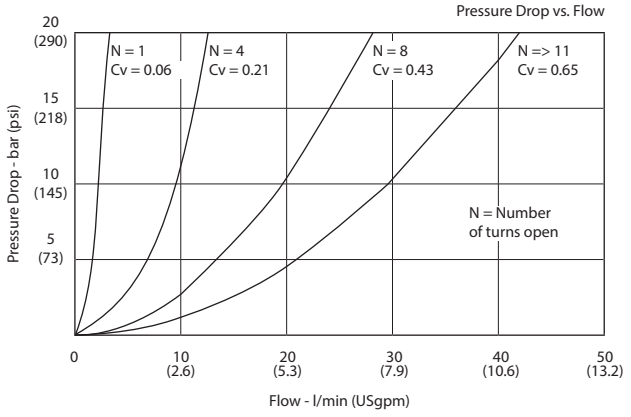


Typical performance based on water

## Installation Diagram

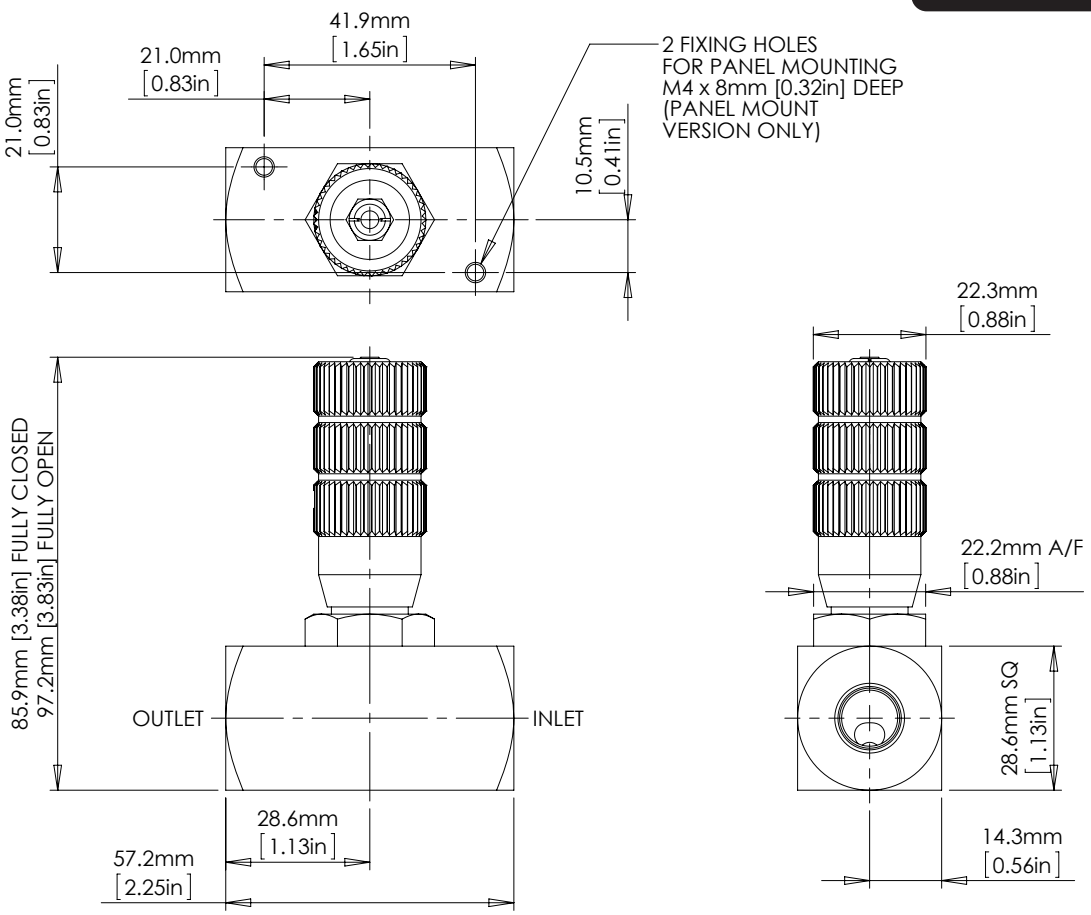


## Product Selector

FMF25 P - PM - NBR - 8K

| VALVE TYPE | PORTING OPTIONS | VALVE OPTIONS | SEAL OPTIONS | MAX WORKING PRESSURE |
|---|---|---|---|---|
| | | Leave blank if not required | Leave blank for Viton® seals -10˚C to +120˚C | |
| FMF25 | P<br>1/4" BSPP female | PM<br>Panel mount | NBR<br>Nitrile seals<br>-30˚C to +105˚C | 8K<br>552 bar<br>(8,000 psi)<br>Liquid |
| | N<br>1/4" NPT female | | HNBR<br>Hydrogenated Nitrile seals<br>-20˚C to +120˚C | 276 bar<br>(4,000 psi)<br>Gas |
| | | | EP<br>EPDM seals<br>-45˚C to +120˚C | |
| | | | KLZ<br>Kalrez seals<br>-25˚C to +120˚C | |
| Repair and seal kits are available on request<br>For a seal kit add SK at the end of the model code and for a repair kit add RK | | | Further seal options are available on request<br>⚠ Exposure to high and low fluid temperatures will influence handle temperature. Operator safety must be considered | |