
H3


PISTON HYDRAULIC ACTUATOR

1/4" UP TO 34.5 BAR 500 PSI


The H3 is a stainless steel piston-style hydraulic or pneumatic actuator for P



Piston actuator for hydraulic or pneumatic pilot. 1/4" NPT. Maximum pilot pressure 500 psi (34.5 bar).

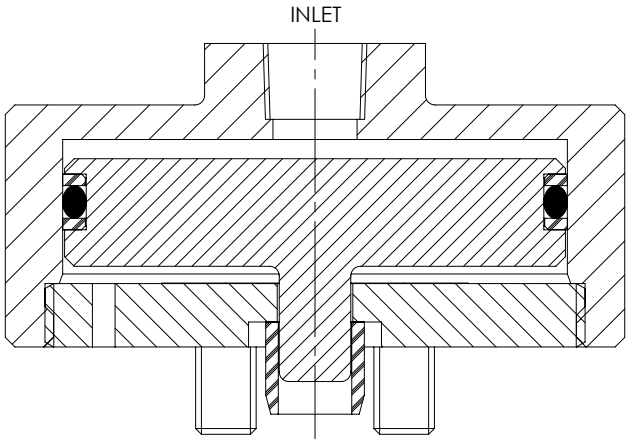

Specifications

BASIC MODEL NUMBER	H3
SYMBOL	
MAX WORKING PRESSURE	34.5 bar (500 psi)
MAX WORKING PRESSURE	34.5 bar (500 psi)
FLUID	Hydraulic oil or air See materials section
TEMPERATURE RANGE	See Product Selector opposite and Technical Data section
PORT SIZE	1/4"
WEIGHT	1.0 kg (2.2 lb)


Specifications may change without notice


Materials

⚠ The standard valve has Viton® seals. Further seal options are available via the Product Selector. Compatibility with the working fluid at the operating temperature must be considered.

Typical Performance

Installation Diagram



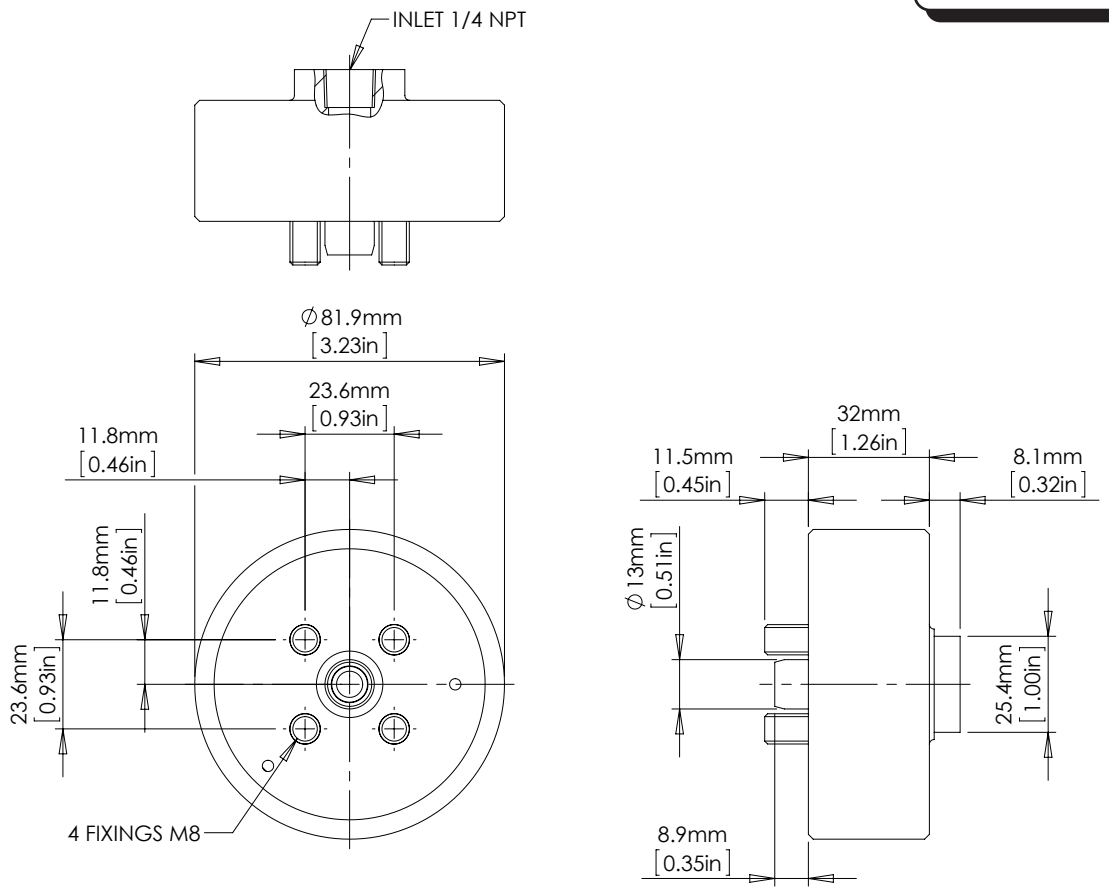

Product Selector

H3 ? - ? - 10K

VALVE TYPE	PORTING OPTIONS	SEAL OPTIONS	CRACKING PRESSURE
H3	? 1/4" BSPP female	Leave blank for Viton® seals -10°c to +120°c ?	10K 34.5 bar (500 psi) ?

Repair and seal kits are available on request

For a seal kit add SK at the end of the model code and for a repair kit add RK