# HC

## SOLENOID THRUSTER


n/a

N/A


The HC is a st[illegible]eel solenoid thruster with a Hirschmann-style DIN 43650 c[illegible].



24 V DC, 15.5 W. Ambient -10°C to +60°C. IP65 with DIN connector.

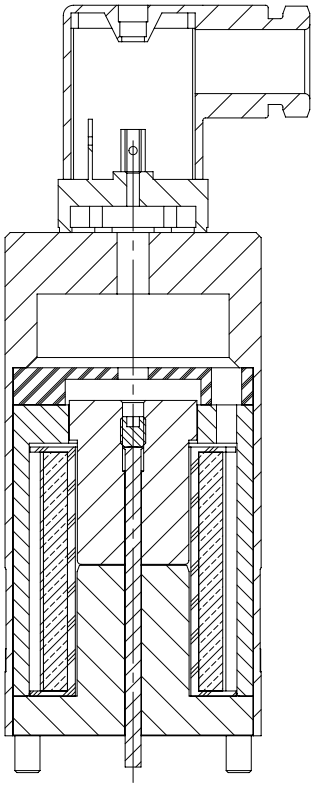

## Specifications

| BASIC MODEL NUMBER | HC |
|---|---|
| SYMBOL |  |
| MAX WORKING PRESSURE | n/a<br>(n/a) |
| MAX WORKING PRESSURE | n/a<br>(n/a) |
| FLUID | n/a<br>See materials section |
| TEMPERATURE RANGE | See Product Selector opposite and Technical Data section |
| PORT SIZE | n/a |
| WEIGHT | 1.0 kg<br>(2.2 lb) |


Specifications may change without notice

## Materials

⚠ The standard valve has Viton® seals. Further seal options are available via the Product Selector. Compatibility with the working fluid at the operating temperature must be considered.

## Typical Performance

## Installation Diagram

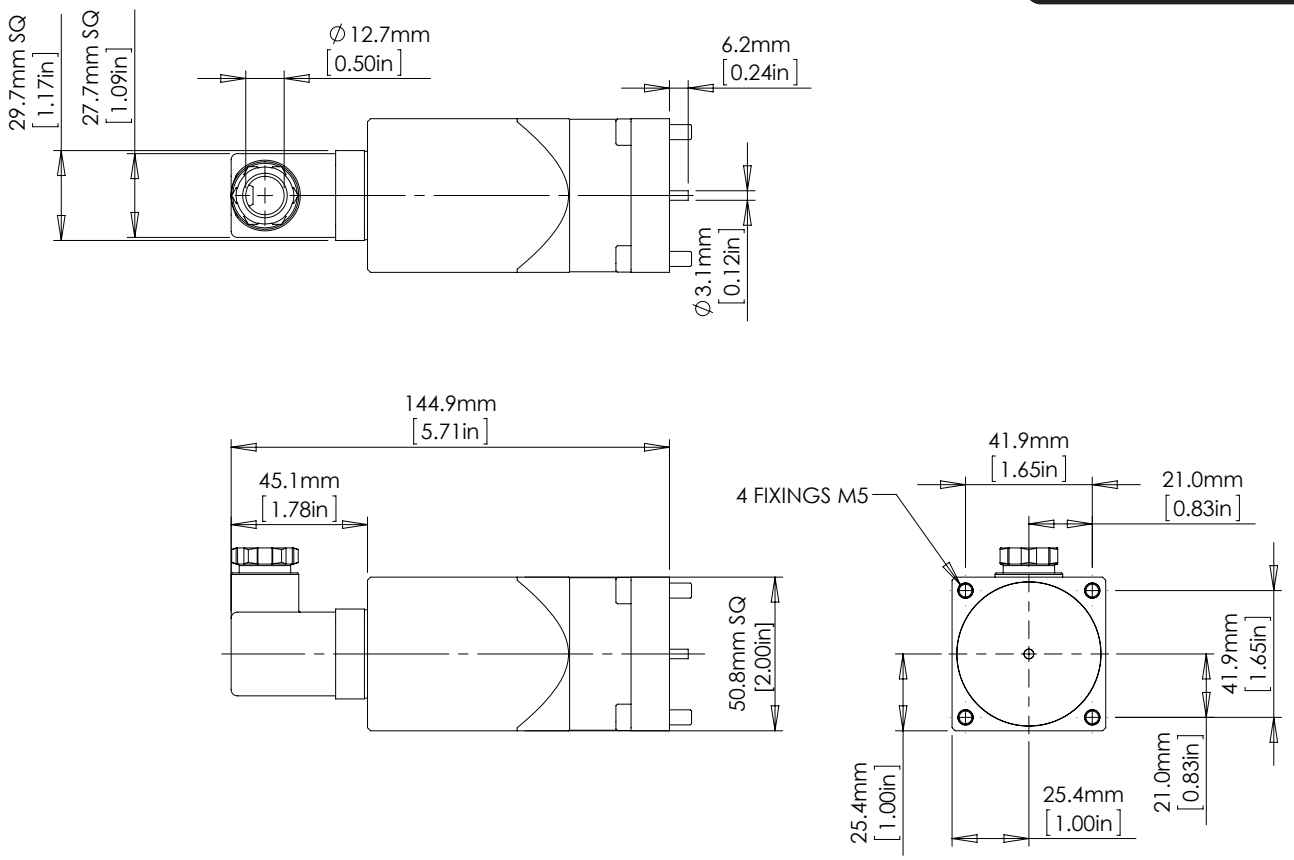


## Product Selector

HC ? - ? - n/a

| VALVE TYPE | PORTING OPTIONS | SEAL OPTIONS | CRACKING PRESSURE |
|---|---|---|---|
| HC | ?<br>n/a | Leave blank for Viton® seals -10˚c to +120˚c<br>? | n/a<br>n/a<br>(n/a)<br>? |

Repair and seal kits are available on request

For a seal kit add SK at the end of the model code and for a repair kit add RK