KC

SOLENOID THRUSTER


n/a

N/A


The KC is a stainless steel solenoid thruster with a Kopex-style conduit connector.



24 V DC, 15.5 W. Ambient -10°C to +60°C. Supplied with 1/2" Kopex conduit fitting.

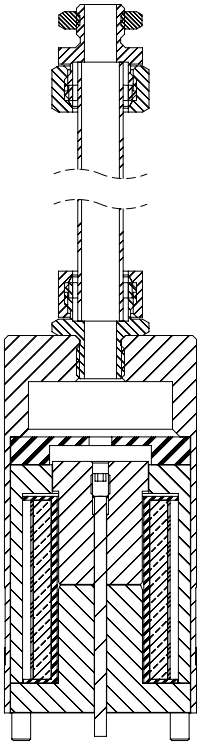

Specifications

BASIC MODEL NUMBER	KC
SYMBOL	
MAX WORKING PRESSURE	n/a (n/a)
MAX WORKING PRESSURE	n/a (n/a)
FLUID	n/a See materials section
TEMPERATURE RANGE	See Product Selector opposite and Technical Data section
PORT SIZE	n/a
WEIGHT	1.0 kg (2.2 lb)


Specifications may change without notice

Materials

⚠ The standard valve has Viton® seals. Further seal options are available via the Product Selector. Compatibility with the working fluid at the operating temperature must be considered.

Typical Performance

Installation Diagram

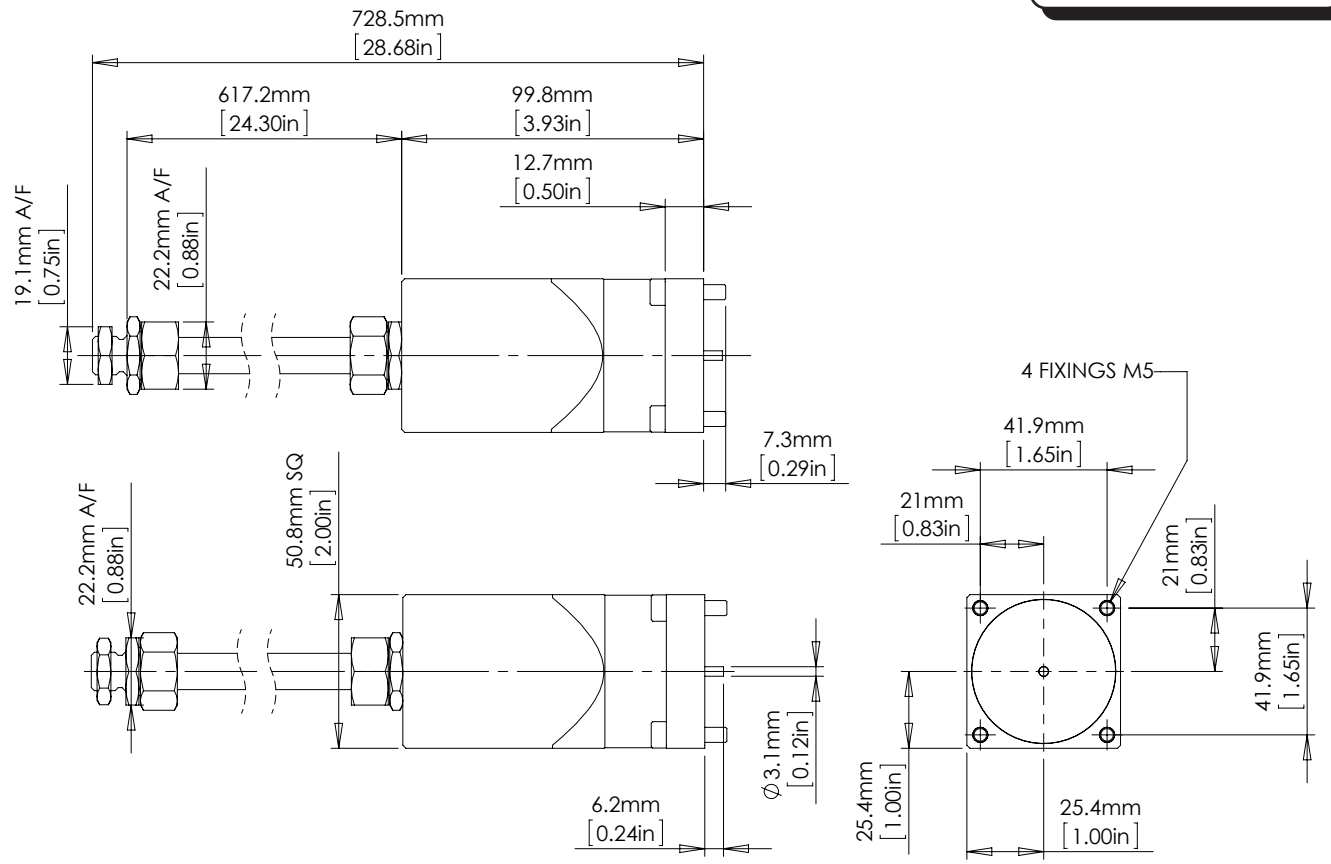

Product Selector

KC ? - ? - n/a

VALVE TYPE	PORTING OPTIONS	SEAL OPTIONS	CRACKING PRESSURE
KC	? n/a	Leave blank for Viton® seals -10°c to +120°c ?	n/a n/a (n/a) ?

Repair and seal kits are available on request

For a seal kit add SK at the end of the model code and for a repair kit add RK