L & DL


MANUAL LEVER ACTUATOR

n/a


N/A

L is a detented lever; DL is a non-detented deadman's lever, both 316 stainless steel.






Manual lever. L remains at the limit of travel after operating.

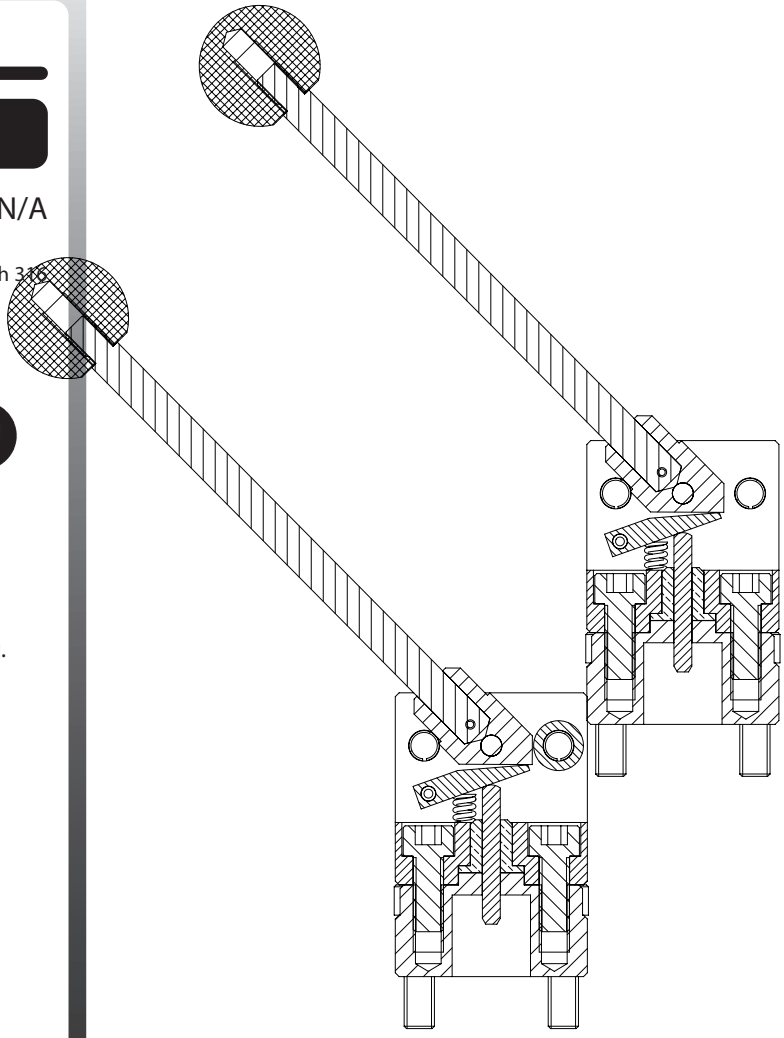

Specifications

BASIC MODEL NUMBER	L & DL
SYMBOL	
MAX WORKING PRESSURE	n/a (n/a)
MAX WORKING PRESSURE	n/a (n/a)
FLUID	n/a See materials section
TEMPERATURE RANGE	See Product Selector opposite and Technical Data section
PORT SIZE	n/a
WEIGHT	1.5 kg (3.3 lb)


Specifications may change without notice

Materials

⚠ The standard valve has Viton® seals. Further seal options are available via the Product Selector. Compatibility with the working fluid at the operating temperature must be considered.

Typical Performance

Installation Diagram

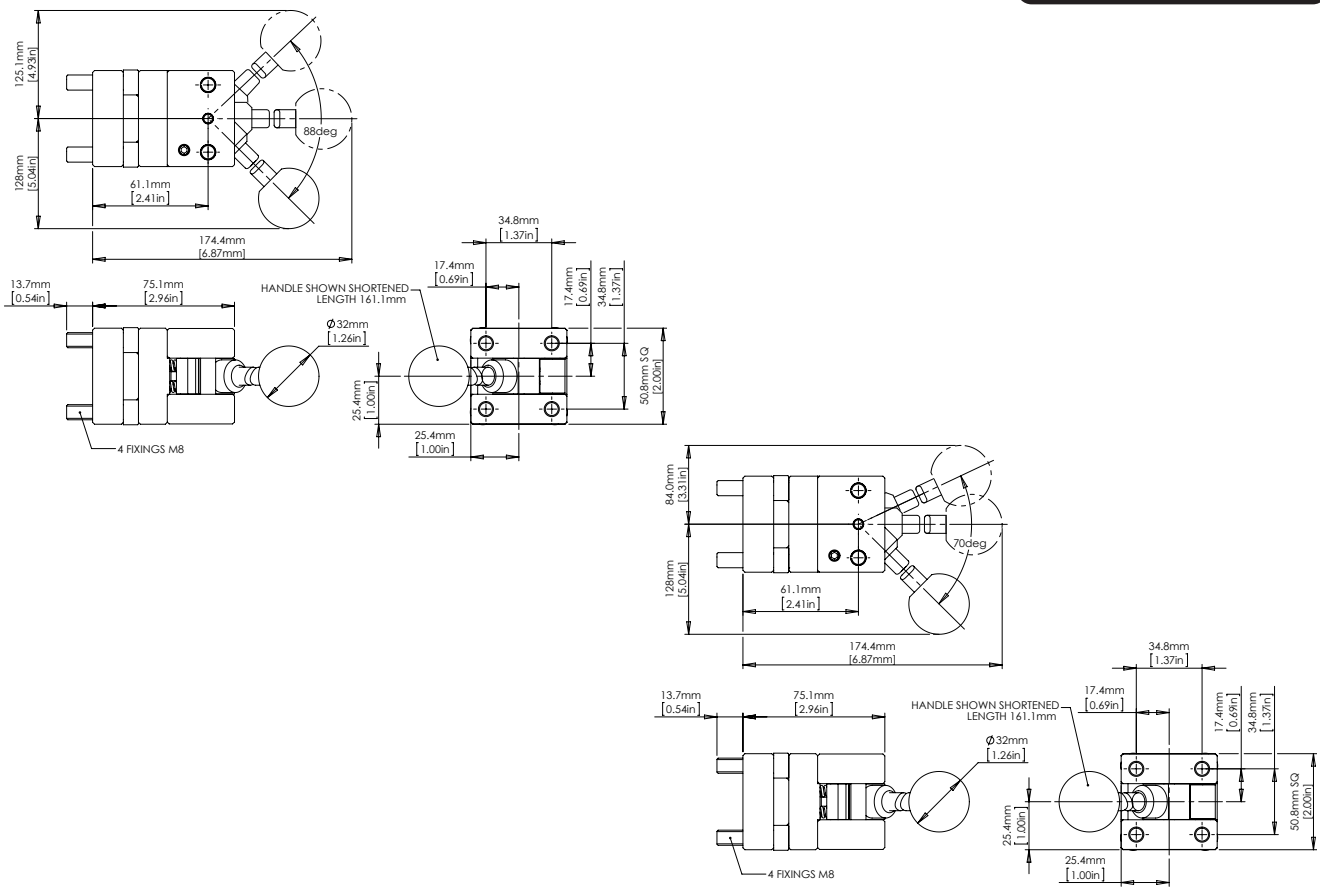

Product Selector

L & DL ? - ? - n/a

VALVE TYPE	PORTING OPTIONS	SEAL OPTIONS	CRACKING PRESSURE
L & DL	? n/a	Leave blank for Viton® seals -10˚c to +120˚c ?	n/a n/a (n/a) ?

Repair and seal kits are available on request

For a seal kit add SK at the end of the model code and for a repair kit add RK