

M1-50

?

1/2” UP TO 1,379 BAR 20,000 PSI




The M1-50 is a 1/2”2-position 2-port pilot operated decompression check / stop valve for pressures up to 20,000 psi.

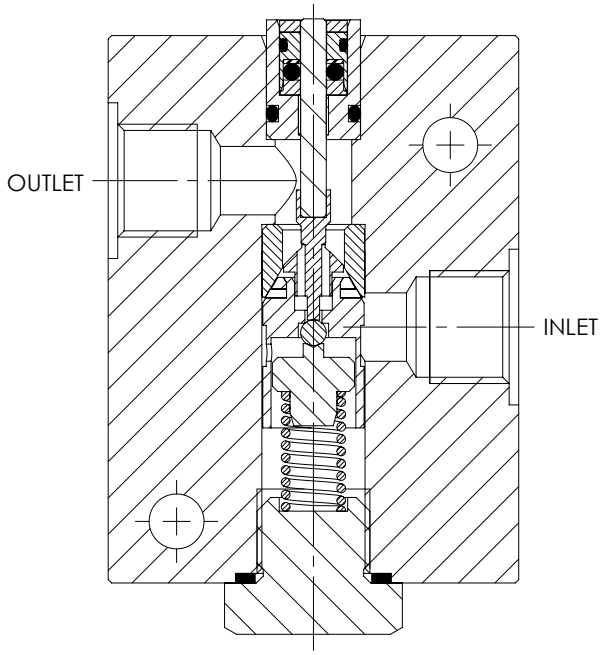

- Stainless Steel Construction
- Suitable for liquid use only
- Various actuation types available
- Version available for subsea use
- Various porting options available

Specifications

BASIC MODEL NUMBER	M1-50
SYMBOL	
MAX WORKING PRESSURE	1,379 bar (20,000 psi)
CV (FLOW CAPACITY)	?
PILOT RATIO	?
FLUID	Liquids See materials section
TEMPERATURE RANGE	See Product Selector opposite and Technical Data section
PORT SIZE	1/2”
WEIGHT	2.5 kg (5.5 lb)

Specifications may change without notice

Materials


Externally Exposed Parts: 316 Stainless Steel

Internally Wetted Parts: 316, 440C and 302 Stainless Steel and Acetal

The standard valve is designed for use with mineral oil and water glycols, and may also be used with a wide variety of media compatible with the materials of construction.


⚠ The standard valve has Viton® seals. Further seal options are available via the Product Selector. Compatibility with the working fluid at the operating temperature must be considered.

Typical Performance

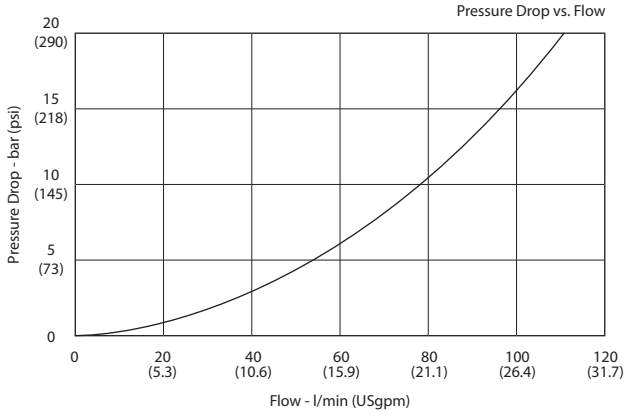

Typical performance based on water

Configuration Diagram



Product Selector

M1-50 P - SW - NBR - 20K


VALVE TYPE	PORTING OPTIONS	VALVE OPTIONS	SEAL OPTIONS	MAX WORKING PRESSURE
M1-50	P 1/2" BSPP female N 1/2" NPT female	Leave blank if not required SW Suitable for subsea use SWD Materials compatible with seawater	Leave blank for Viton® seals -10˚c to +120˚c NBR Nitrile seals -30˚c to +105˚c HNBR Hydrogenated Nitrile -20˚c to +120˚c KLZ Kalrez® seals -25˚c to +200˚c Further seal options are available on request	20K 1,379 bar (20,000 psi) Liquid

Repair and seal kits are available on request


For a seal kit add SK at the end of the model code and for a repair kit add RK


M1-50-H3



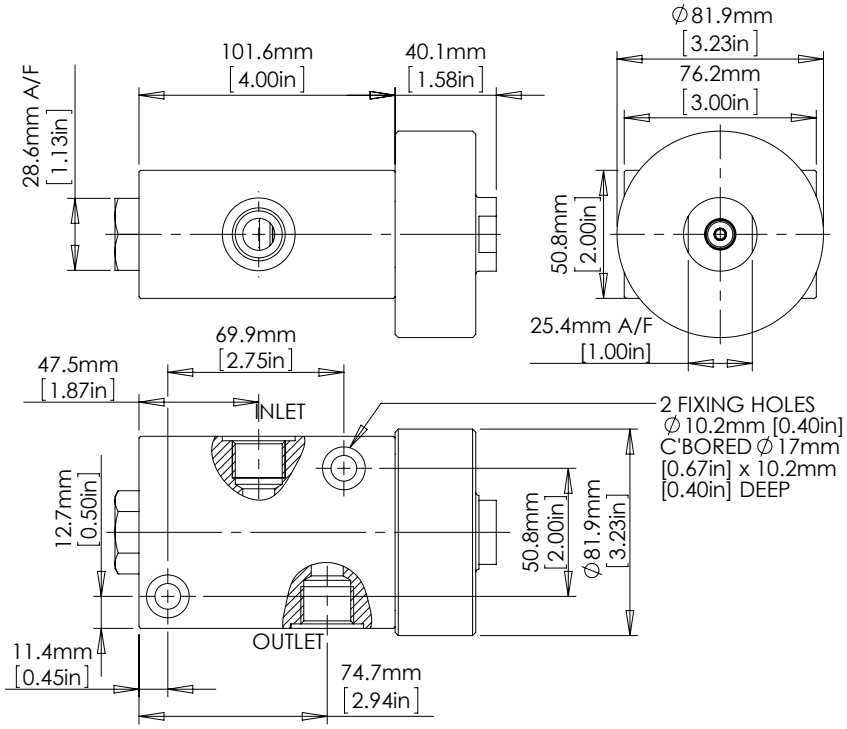


M1-50-L

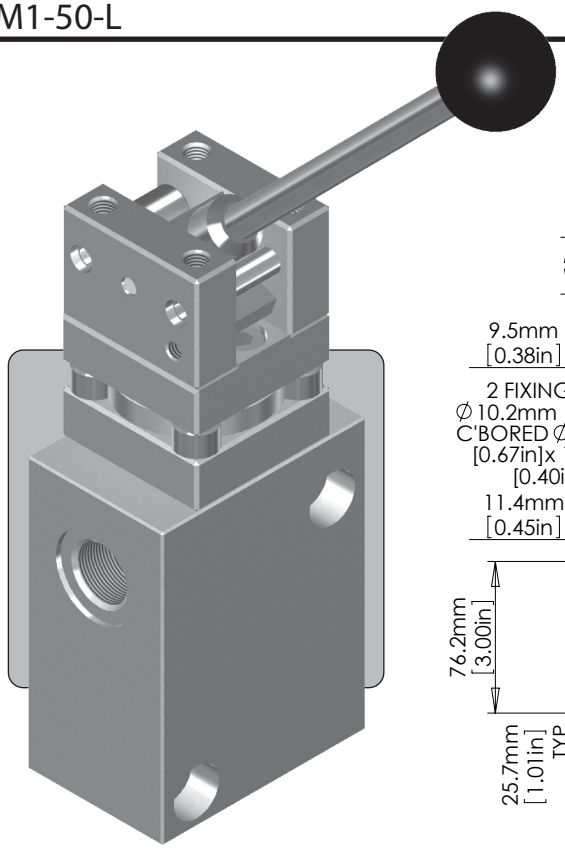

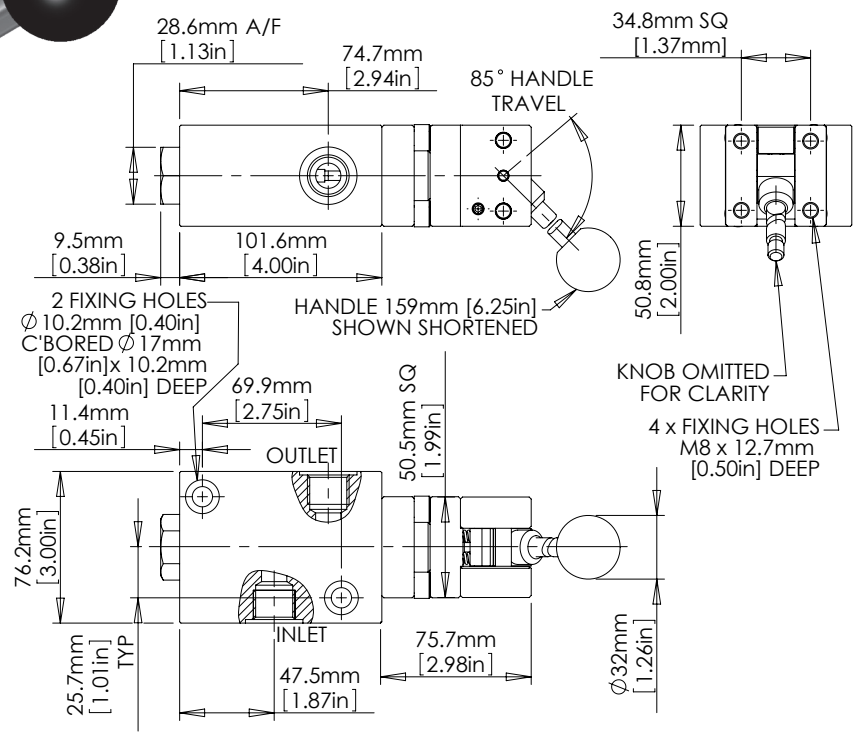

M1-50-H0



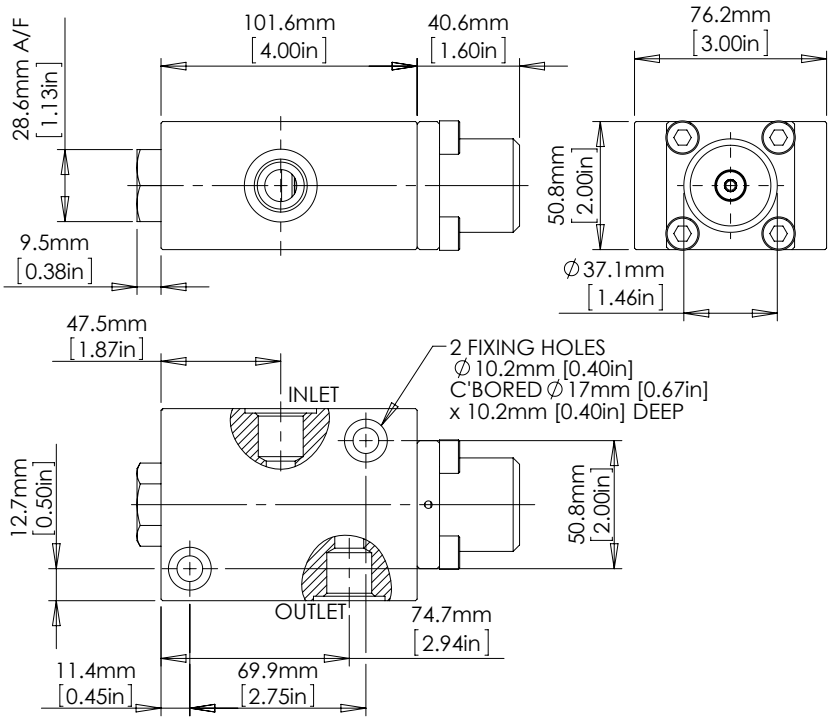

M1-50-DL

