
MF25

METERING VALVE


1/4" UP TO 552 BAR 8,000 PSI




The MF25 is a 1/4" nominal bore flow metering valve, adjustable via a micrometer style handle. The valve is marked with a preferred direction of flow, but it may be used in the opposite direction to provide bi-directional speed control of a cylinder or actuator, although the level of metering will vary depending on direction.

Note that this valve is not intended to provide tight shut-off when closed.

- Flow control valve for metering applications
- Micrometer style adjustment with engraved graduations
- Lockable adjustment
- Non-rotating valve stem protects valve seat
- Suitable for short term subsea use
- Suitable for liquid or gas
- Suitable for use with air, nitrogen, sweet natural gas, mineral oils, water glycols and plain water
- Suitable for many other media. Contact us for advice
- Cartridge, manifold mount and panel mount versions available
- Various porting and seal options available

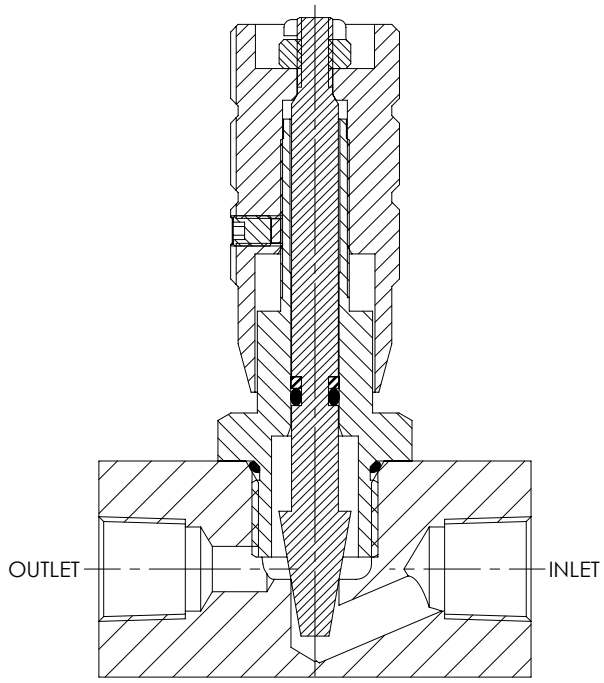

Specifications

BASIC MODEL NUMBER	MF25
SYMBOL	
MAX WORKING PRESSURE (LIQUID)	552 bar (8,000 psi)
MAX WORKING PRESSURE (GAS)	276 bar (4,000 psi)
CV (FLOW CAPACITY)	Up to 0.65 See Typical Performance Graph
FLUID	Liquids and Gases See materials section
TEMPERATURE RANGE	See Product Selector opposite and Technical Data section
PORT SIZE	1/4"
WEIGHT	0.45 kg (1.0 lb)

Specifications may change without notice

Materials


Externally Exposed Parts: 316, 304 and 17-4 PH stainless steel.

Internally Wetted Parts: 316 and 17-4 PH stainless steel and PTFE.

The standard valve is designed for use with air, nitrogen, sweet natural gas, mineral oil, water glycols and plain water and may also be used with a wide variety of media compatible with the materials of construction. Other material options are available. Contact us for advice.


⚠ The standard valve has Viton® seals. Further seal options are available via the Product Selector. Compatibility with the working fluid at the operating temperature must be considered.


Typical Performance

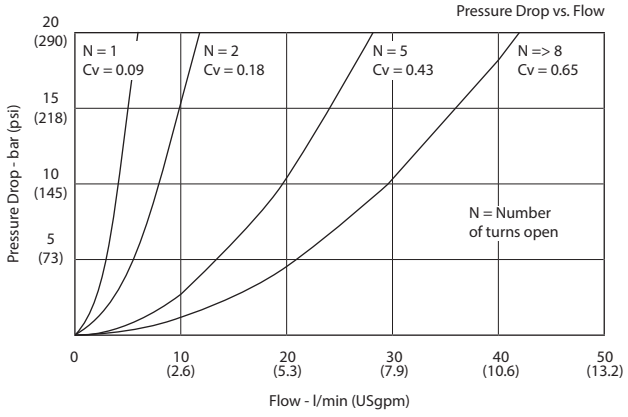

Typical performance based on water

Installation Diagram



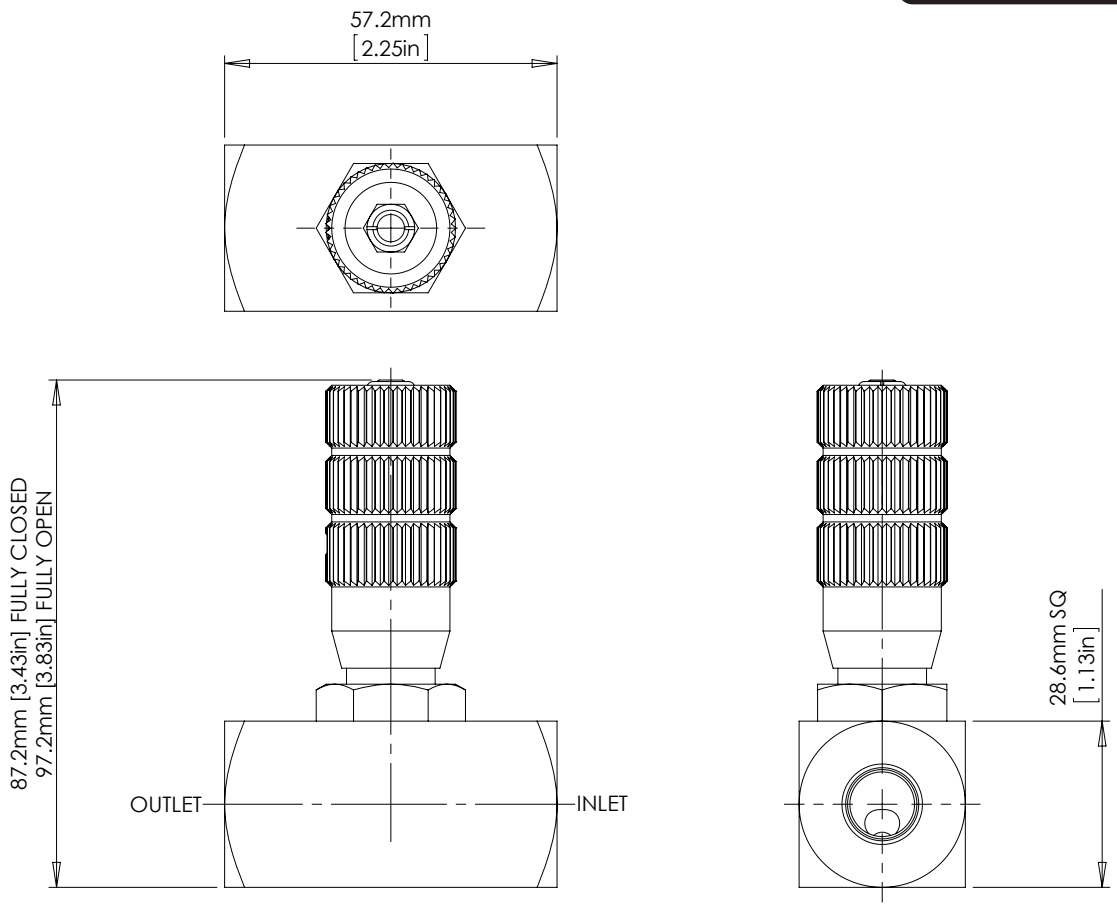


Product Selector


MF25 P - PM - NBR - 8K

VALVE TYPE	PORTING OPTIONS	VALVE OPTIONS	SEAL OPTIONS	MAX WORKING PRESSURE
		Leave blank if not required	Leave blank for Viton® seals -10˚C to +120˚C	
MF25	P 1/4" BSPP female	PM Panel mount Not available with manifold or cartridge versions	NBR Nitrile seals -30˚C to +105˚C	8K 552 bar (8,000 psi) Liquid
	N 1/4" NPT female		HNBR Hydrogenated Nitrile seals -20˚C to +120˚C	276 bar (4,000 psi) Gas
	M Manifold mount		EP EPDM seals -45˚C to +120˚C	
	C Cartridge style Seat in cavity		KLZ Kalrez seals -25˚C to +120˚C	
	FC Full cartridge Seat in cartridge		Further seal options are available on request	
Repair and seal kits are available on request For a seal kit add SK at the end of the model code and for a repair kit add RK			⚠ Exposure to high and low fluid temperatures will influence handle temperature. Operator safety must be considered	

MF25
METERING VALVE


Cartridge Valve

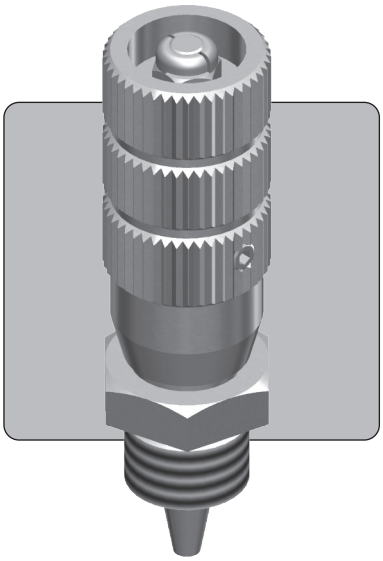


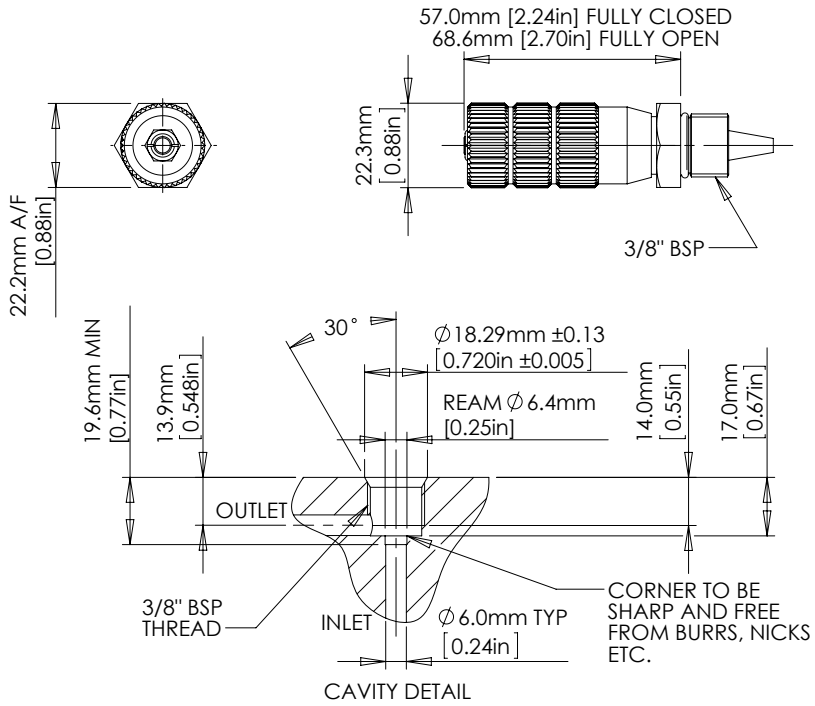

CONTACT US FOR FULL CAVITY MANUFACTURING DETAILS


Full Cartridge Valve

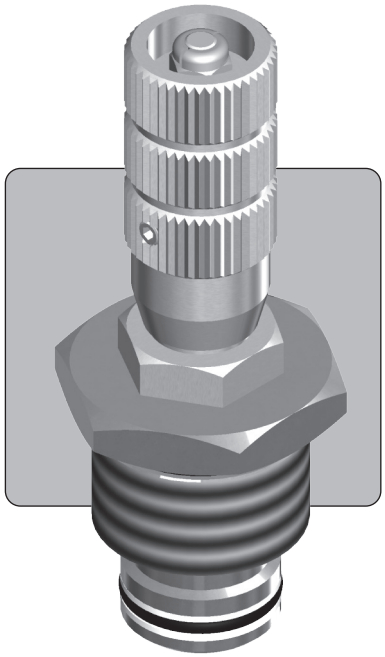


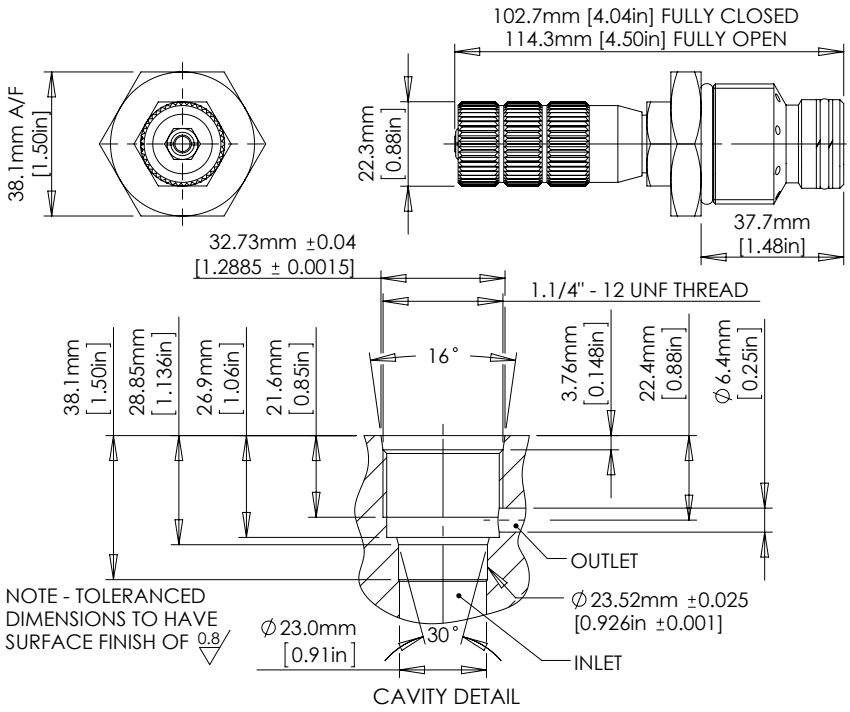

CONTACT US FOR FULL CAVITY MANUFACTURING DETAILS

Panel Mounted Valve

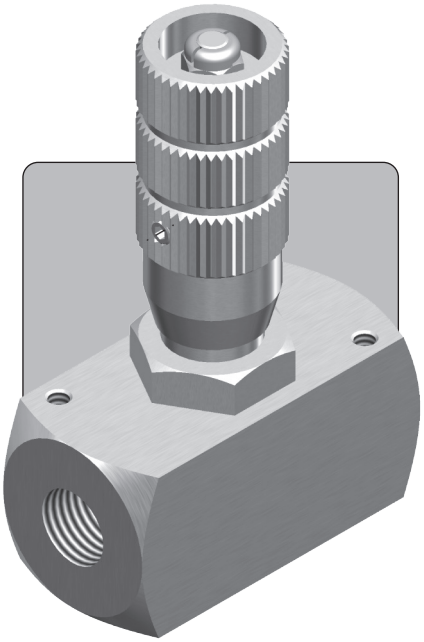

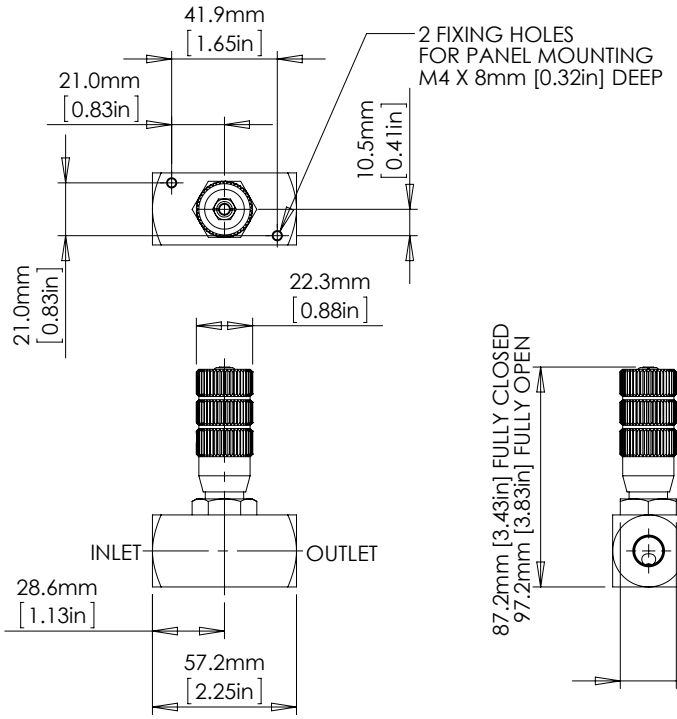

Manifold Mount Valve

