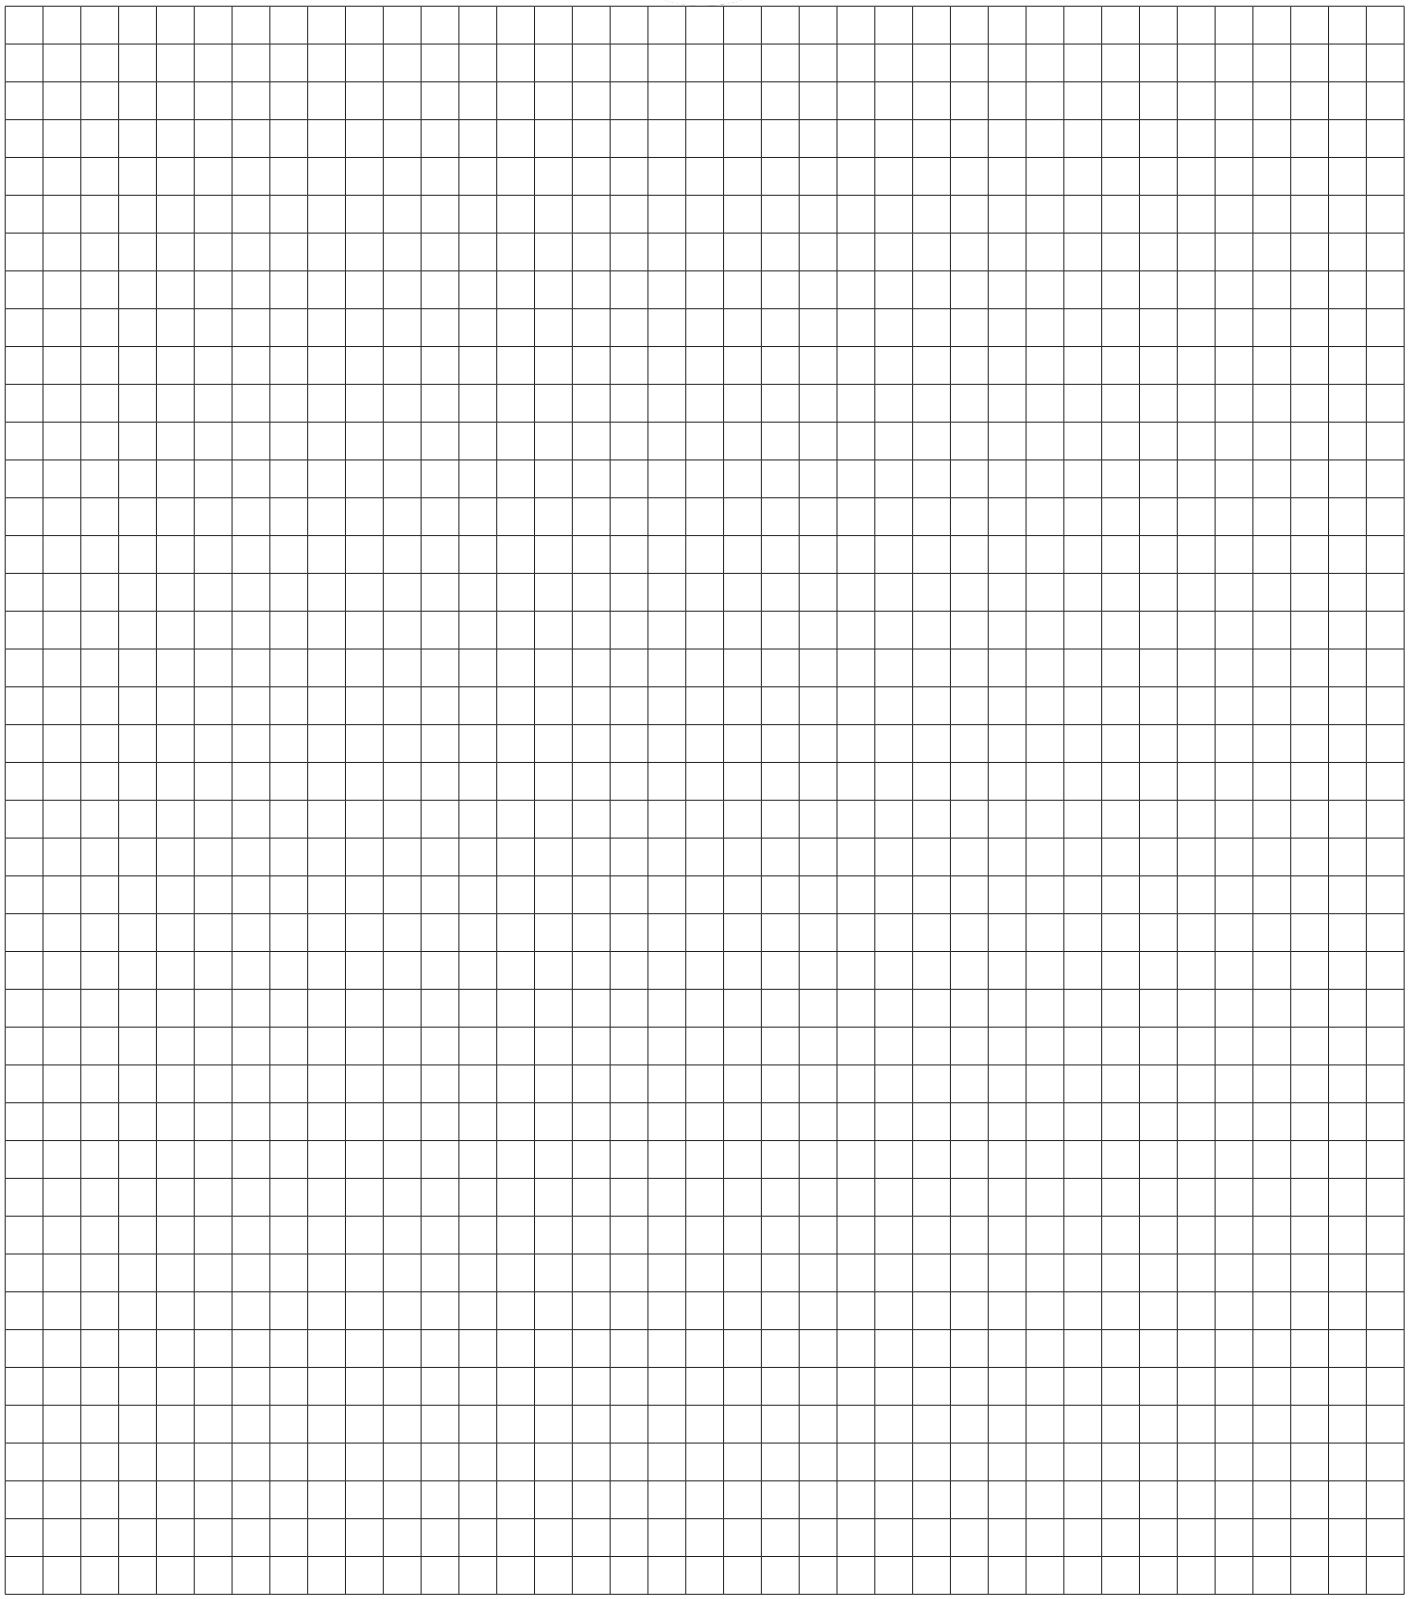


Superb service, product quality and the pursuit of innovative design

Pilot Operated Check

Overview

Benefits Checklist

Pilot-to-open check for locking load on double-acting actuators.

Double-pilot, decompression, unloader and lever-operated types.

High pressure capability on selected V1 and M1 valves.

Cartridge and ported installation.

Function

A pilot operated check allows free flow in one direction and blocks reverse flow until a pilot signal opens the seat. Unloader and decompression variants release trapped pressure in a controlled way.

Key features

Types include V1-37, MS75, SVA12, B1-12, 2XPC50, M1-50, UL75/50 and SVT12, covering liquids and gases at a range of pressures.

Applications

Load holding, thermal decompression of trapped volumes, accumulator unloading, and redundant hydraulic supplies.


	Nominal Size	Pressure	Media	Valve Type	Page
Pilot operated check valves	3/8″ 3/4″ 1/8″ 1/8″	1,379 bar (20,000 psi)* 828 bar (12,000 psi) 276 bar (4,000 psi) 1,379 bar (20,000 psi)	Liquids & Gases Liquids only Liquids & Gases Liquids only	V1-37 MS75 SVA12 B1-12	? ? ? ?
Double pilot operated check valves	3/8″, 1/2″	414 bar (6,000 psi)	Liquids only	2XPC50	?
Decompression check valves	1/2″	1,379 bar (20,000 psi)	Liquids only	M1-50	?
Unloader valves	1/2″ 3/4″	207 bar (3,000 psi) 379 bar (5,500 psi)	Liquids only Liquids only	UL75/50 UL75	? ?
Lever operated check valves	1/8″	138 bar (2,000 psi)	Liquids & Gases	SVT12	?

* NOTE - Pressure rating is reduced with gases




Pilot operated check valves

Pages ??-??




Double pilot operated check valves

Pages ??-??




Decompression check valves

Pages ??-??



Unloader valves

Pages ??-??



Lever operated check valves

Pages ??-??