
PRV75C

RELIEF VALVE

3/4"


UP TO 414 BAR 6,000 PSI




The PRV75C is a cartridge style relief valve. Designed for emergency relief applications, it may be used to protect systems up to 414 bar (6,000 psi).

The valve is a proportional metering style relief valve, and is approved as a safety accessory to category IV of the Pressure Equipment Directive, enabling its use in the most demanding applications.

- Approved to category IV of the Pressure Equipment Directive (2014/68/EU)
- Emergency relief protection up to 414 bar (6,000 psi)
- Available preset or may be set using internal adjustment
- Cartridge style valve, ideal for use in manifolds
- Stainless steel external components
- Minimal leakage at 90% of set pressure
- Reseat within 20% of set pressure
- Repeatabily within ±5% of set pressure
- Suitable for use with mineral oils and water glycols
- Various spring ranges available.

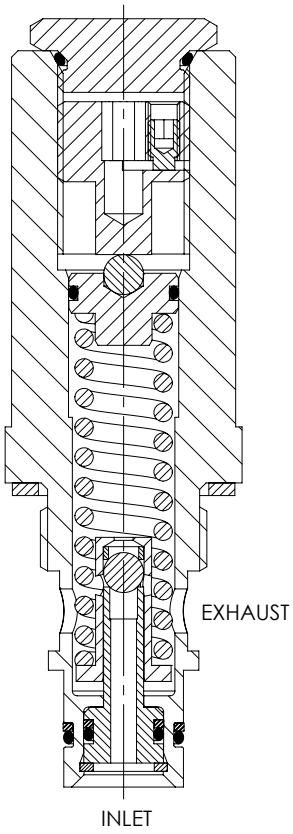

Specifications

BASIC MODEL NUMBER	PRV75C
SYMBOL	
MAX WORKING PRESSURE	414 bar (6,000 psi)
MAX OUTLET PORT PRESSURE	69 bar (1,000 psi) Note: Any outlet port pressure is directly additive to the set pressure
ORIFICE SIZE	Ø4.1mm (Ø0.161")
FLUID	Liquids only See materials section
TEMPERATURE RANGE	See Product Selector opposite and Technical Data section
NOMINAL SIZE	3/4"
WEIGHT	0.6 kg (1.3 lb)

Specifications may change without notice

Materials


Externally Exposed Parts: 316 stainless steel.

Internally Wetted Parts: 316, 302 and 431 stainless steel, silicon nitride, carbon steel and acetal.

The standard valve is designed for use with mineral oil and water glycols. Contact us for advice when use with other media is required.


⚠ The standard valve has Nitrile seals. Further seal options are available via the Product Selector. Compatibility with the working fluid at the operating temperature must be considered.


Typical Performance

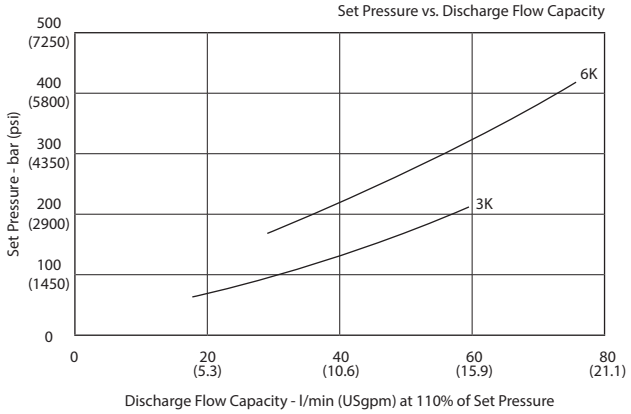


Typical performance based on water glycol
Contact us with system details for an application specific calculation

Installation Diagram



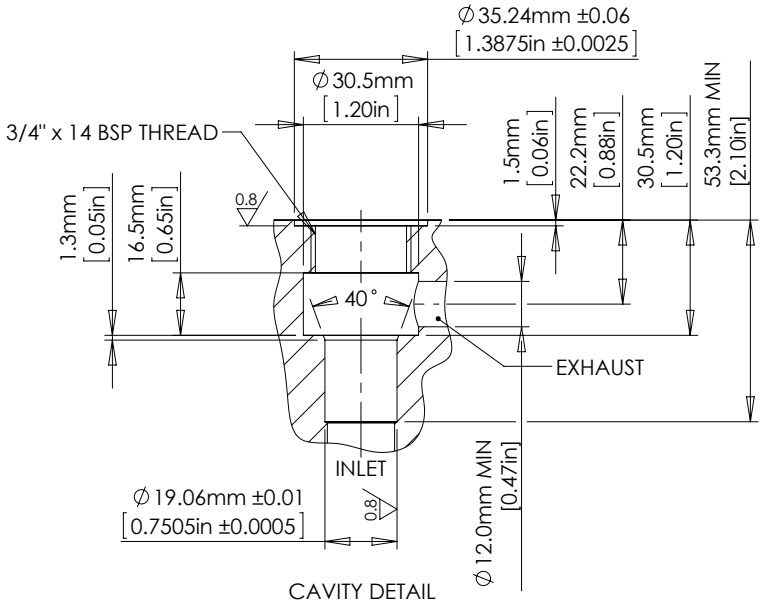

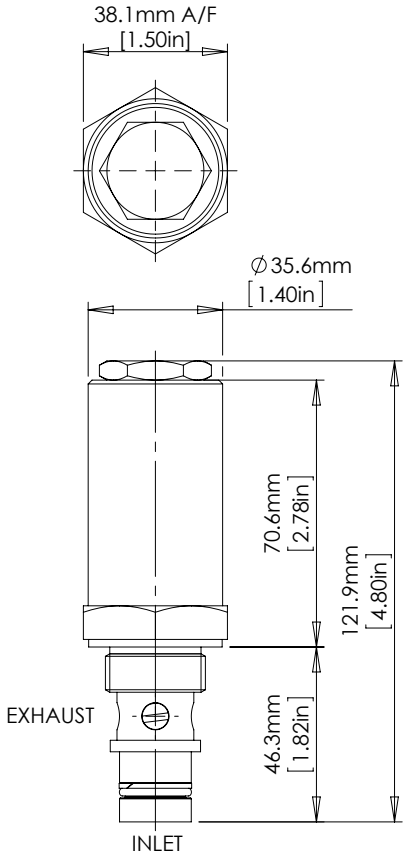

Product Selector

PRV75C - V - 3K

VALVE TYPE	SEAL OPTIONS	SET PRESSURE RANGE
PRV75C	Leave blank for Nitrile seals -30˚C to +105˚C **V** Viton® seals -10˚C to +120˚C Further seal options are available on request	**3K** 69 - 207 bar (1,000 - 3,000 psi) **6K** 172 - 414 bar (2,500 - 6,000 psi) Advise us of set pressure if factory pre-setting is required

Repair and seal kits are available on request

For a seal kit add SK at the end of the model code and for a repair kit add RK