
# R75

## EXCESS FLOW VALVE


**3/4″** UP TO 414 BAR 6,000 PSI




The R75 is a 3/4″ nominal bore excess flow valve suitable for use with liquids and gases.

The valve, sometimes known as a velocity fuse or hose burst valve, is designed to shut off in the event of a preset flow being exceeded. Following closure, the valve is reset to open by equalising or reversing pressure across the valve.

- 2 port in-line mounted excess flow valve
- Internally adjustable shut-off flow, tamper-resistant when installed. May be factory preset if required
- Low differential switching pressure minimises pressure loss
- Ideal for hose burst protection, to reduce fluid loss following a line rupture
- Various reset options available
- O-ring sealed for virtually leak tight shut-off (except auto-reset version)
- Free reverse flow
- Suitable for liquid and gas use
- Stainless steel construction
- Various seal and porting options available

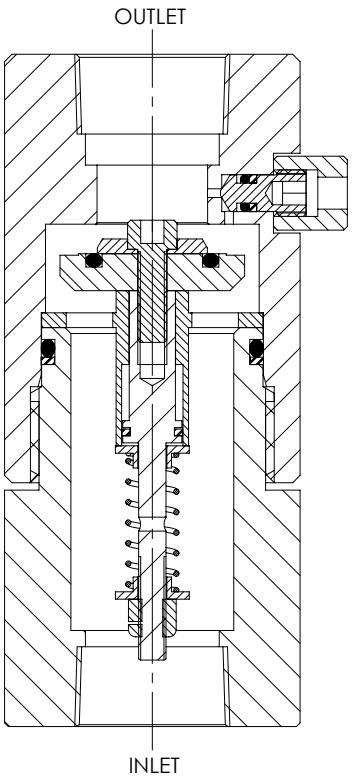


## Specifications

| BASIC MODEL NUMBER | R75 |
|---|---|
| SYMBOL |   |
| MAX WORKING PRESSURE (LIQUID) | 414 bar (6,000 psi) |
| MAX WORKING PRESSURE (GAS) | 276 bar (4,000 psi) |
| DIFFERENTIAL SWITCHING PRESSURE | LF 0.1 - 0.5 bar (1 - 7 psi)<br>HF 0.5 - 2.4 bar (7 - 35 psi) |
| REVERSE FLOW CAPACITY (CV) | 4.8 |
| FLUID | Liquids and Gases<br>See materials section |
| TEMPERATURE RANGE | See Product Selector opposite and Technical Data section |
| PORT SIZE | 3/4″ |
| WEIGHT | 1.4 kg (3.1 lb) |

Specifications may change without notice

## Materials


Externally Exposed Parts: 316 and other 300 series stainless steels.

Internally Wetted Parts: 316 and 302 stainless steel and acetal.

The standard valve is designed for use with air, nitrogen, sweet natural gas, mineral oil, water glycols and plain water, and may also be used with a wide variety of media compatible with the materials of construction.


⚠ The standard valve has Viton® seals. Further seal options are available via the Product Selector. Compatibility with the working fluid at the operating temperature must be considered.


## Typical Performance

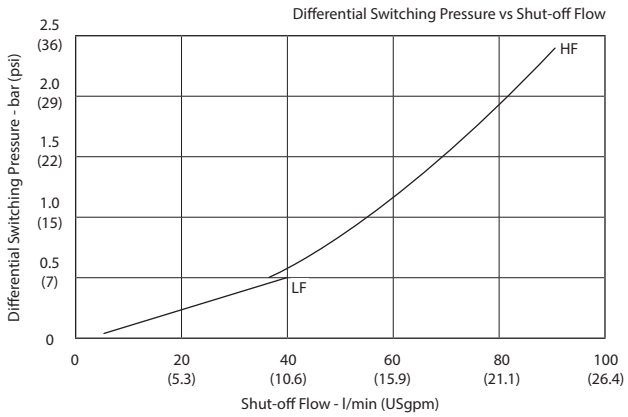



Typical performance based on water
Contact us with system details for an application specific calculation

## Installation Diagram



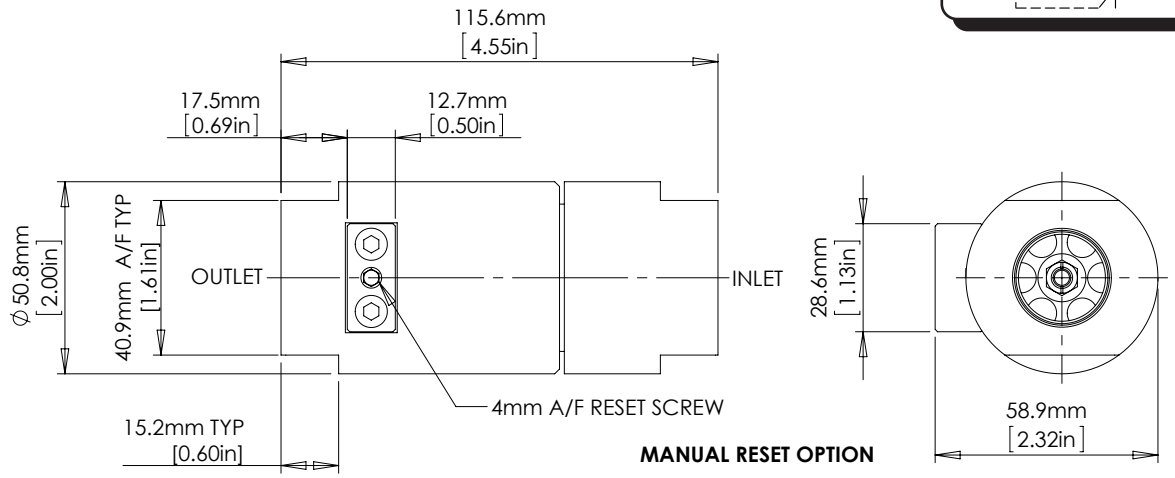


**MANUAL RESET OPTION**

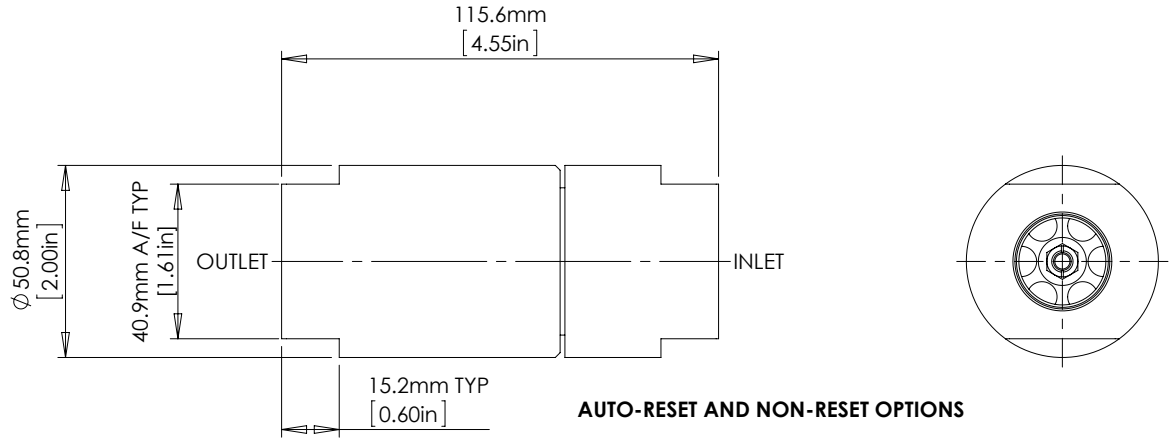


**AUTO-RESET AND NON-RESET OPTIONS**

## Product Selector

R75 P - MR - LF - NBR - 6K

| VALVE TYPE | PORTING OPTIONS | RESET OPTIONS | FLOW RANGE | SEAL OPTIONS | MAX WORKING PRESSURE |
|---|---|---|---|---|---|
| R75 | P<br>3/4" BSPP female<br><br>N<br>3/4" NPT female | MR<br>Manual reset<br><br>AR<br>Auto-reset<br><br>NR<br>Non-reset | LF<br>Low flow<br>5 - 40 l/min<br>(water)<br><br>145 - 1140 $Nm^3/hr$<br>(air @ 276 bar)<br><br>HF<br>High flow<br>37 - 90 l/min<br>(water)<br><br>1058 - 2250 $Nm^3/hr$<br>(air @ 276 bar) | Leave blank for Viton® seals<br>-10˚c to +120˚c<br>NBR<br>Nitrile seals<br>-30˚c to +105˚c<br>EP<br>EPDM seals<br>-45˚c to +120˚c<br>KLZ<br>Kalrez® seals<br>-25˚c to +120˚c<br>HNBR<br>Hydrogenated Nitrile seals<br>-20˚c to +120˚c<br><br>Further seal options are available on request | 6K<br>414 bar<br>(6,000 psi)<br>Liquid<br><br>276 bar<br>(4,000 psi)<br>Gas |

Repair and seal kits are available on request

For a seal kit add SK at the end of the model code and for a repair kit add RK