
RL25-G

RELIEF VALVE


1/4" UP TO 414 BAR 6,000 PSI




The RL25-G is a 1/4" ported relief valve. Designed for emergency relief applications, it may be used to protect systems up to 414 bar (6,000 psi).

The valve is a proportional metering style relief valve with soft seats enabling its use with both liquids and gases, and is approved as a safety accessory to category IV of the Pressure Equipment Directive.

- Approved to category IV of the Pressure Equipment Directive (2014/68/EU)
- Available preset via internal adjustment or with an external handwheel adjustment option
- Wire locking and tagging available on request
- Minimal leakage at 90% of set pressure
- Reseat within 20% of set pressure
- Repeatabily within ±5% of set pressure
- Suitable for subsea use (excluding handwheel version)
- Suitable for use with air, nitrogen, sweet natural gas, mineral oil, water glycols and plain water.
- Suitable for many other media, contact us for advice
- Various spring ranges available

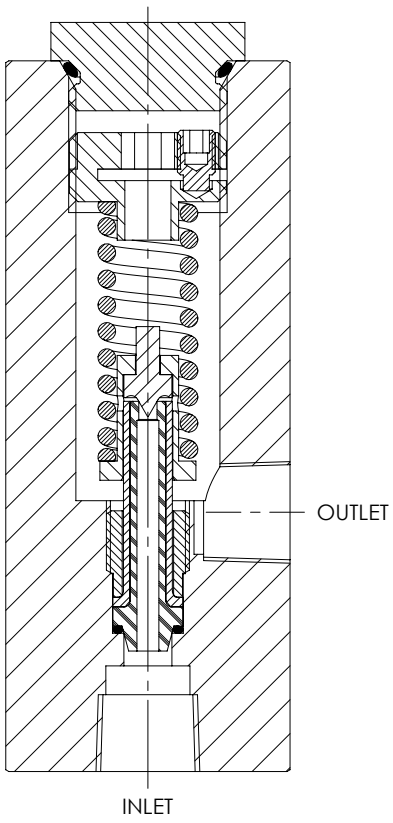

Specifications

BASIC MODEL NUMBER	RL25-G
SYMBOL	
MAX WORKING PRESSURE	414 bar (6,000 psi)
MAX OUTLET PORT PRESSURE	69 bar (1,000 psi) Note: Any outlet port pressure is directly additive to the set pressure
ORIFICE SIZE	Ø2.4mm (Ø0.094")
FLUID	Liquids and Gases See materials section
TEMPERATURE RANGE	See Product Selector opposite and Technical Data section
PORT SIZE	1/4"
WEIGHT	0.9 kg (2.0 lb)

Specifications may change without notice


Materials

Externally Exposed Parts: 316 stainless steel. The handwheel version contains other 300 series stainless steels.

Internally Wetted Parts: 316, 302 and 431 stainless steel and polyamide-imide. The standard valve is designed for use with air, nitrogen, sweet natural gas, mineral oil, water glycols and plain water. Contact us for advice when use with other media is required. Note that use with water above 100°C is not recommended.


⚠ The standard valve has Viton® seals. Further seal options are available via the Product Selector. Compatibility with the working fluid at the operating temperature must be considered.


Typical Performance

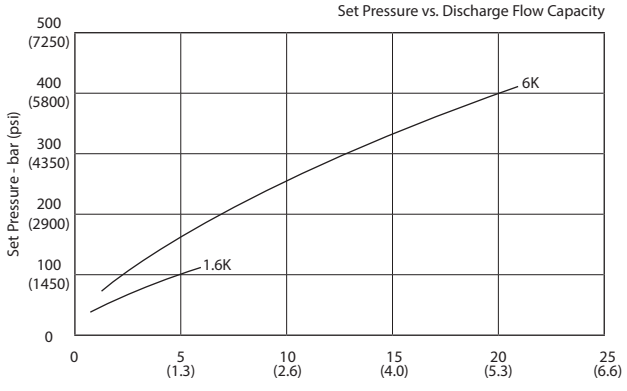

Typical performance based on water
Contact us with system details for an application specific calculation

Installation Diagram



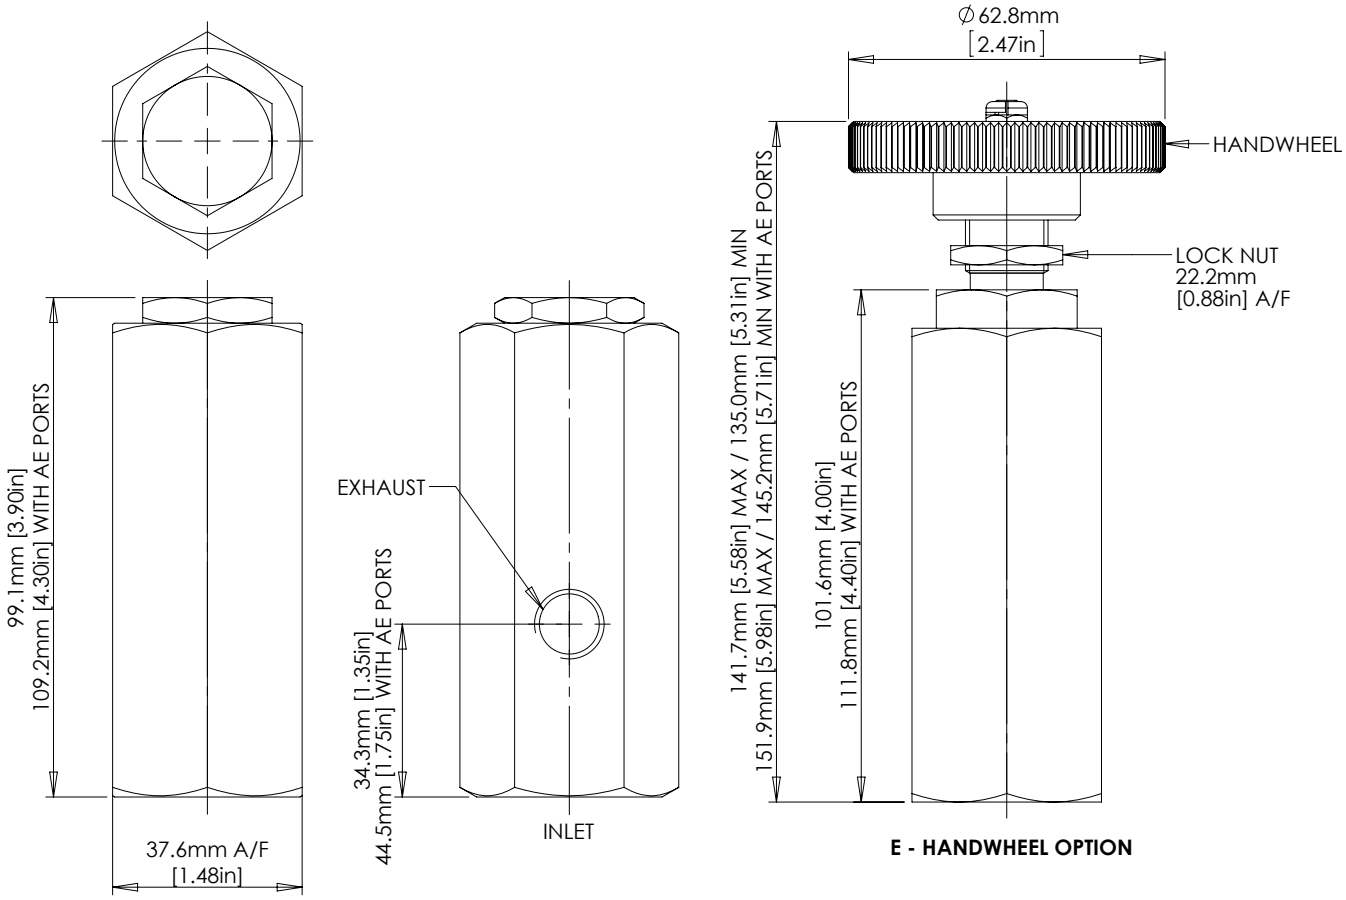

E - HANDWHEEL OPTION

Product Selector

RL25 - 44AE - 25P - E - G - NBR - 1.6K

VALVE TYPE	INLET PORT OPTIONS	EXHAUST PORT OPTIONS	VALVE OPTIONS	SEAT TYPE	SEAL OPTIONS	SET PRESSURE RANGE
		Leave blank for P and N inlet options	Leave blank if none required	G option must be selected	Leave blank for Viton® seals -10˚C to +80˚C	
RL25	P 1/4" BSPP female inlet and exhaust	25P 1/4" BSPP female exhaust	E Handwheel (external) adjustment	G Soft seats	NBR Nitrile seals -30˚C to +80˚C	1.6K 28 - 110 bar (400 - 1,600 psi)
	N 1/4" NPT female inlet and exhaust	25N 1/4" NPT female exhaust	⚠ Exposure to high and low fluid temperatures will influence handle temperature. Operator safety must be considered		EP EPDM seals -40˚C to +80˚C	6K 69 - 414 bar (1,000 - 6,000 psi)
	44AE 1/4" OD medium pressure tube inlet				KLZ Kalrez® seals -25˚C to +80˚C	
	56AE 3/8" OD medium pressure tube inlet				HNBR Hydrogenated Nitrile seals -20˚C to +80˚C	
	81AE 9/16" OD medium pressure tube inlet				Further seal options are available on request	

Repair and seal kits are available on request

For a seal kit add SK at the end of the model code and for a repair kit add RK