
- RL25C-G -

RELIEF VALVE


1/4" UP TO 414 BAR 6,000 PSI




The RL25C-G is a cartridge style relief valve. Designed for emergency relief applications, it may be used to protect systems up to 414 bar (6,000 psi).

The valve is a proportional metering style relief valve with soft seats enabling its use with both liquids and gases, and is approved as a safety accessory to category IV of the Pressure Equipment Directive.

- Approved to category IV of the Pressure Equipment Directive (2014/68/EU)
- Cartridge style valve, ideal for use in manifolds
- Wire locking and tagging available on request
- Minimal leakage at 90% of set pressure
- Reseat within 20% of set pressure
- Repeatabily within ±5% of set pressure
- Suitable for subsea applications
- Suitable for use with air, nitrogen, sweet natural gas, mineral oil, water glycols and plain water
- Suitable for many other media, contact us for advice
- Various spring ranges available

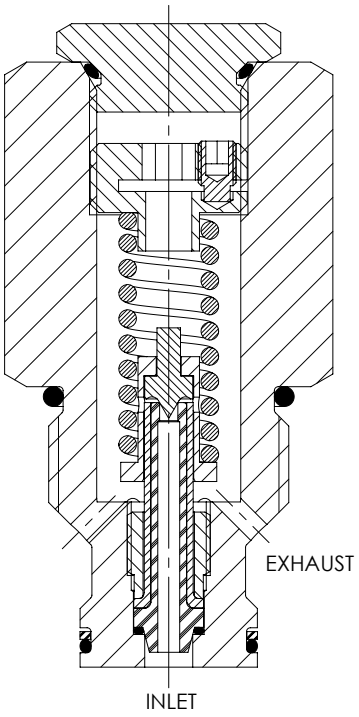

Specifications

BASIC MODEL NUMBER	RL25C-G
SYMBOL	
MAX WORKING PRESSURE	414 bar (6,000 psi)
MAX OUTLET PORT PRESSURE	69 bar (1,000 psi) Note: Any outlet port pressure is directly additive to the set pressure
ORIFICE SIZE	Ø2.4mm (Ø0.094")
FLUID	Liquids and Gases See materials section
TEMPERATURE RANGE	See Product Selector opposite and Technical Data section
NOMINAL SIZE	1/4"
WEIGHT	0.5 kg (1.1 lb)

Specifications may change without notice


Materials

Externally Exposed Parts: 316 stainless steel.

Internally Wetted Parts: 316, 302 and 431 stainless steel and polyamide-imide. The standard valve is designed for use with air, nitrogen, sweet natural gas, mineral oil, water glycols and plain water. Contact us for advice when use with other media is required.


⚠ The standard valve has Viton® seals. Further seal options are available via the Product Selector. Compatibility with the working fluid at the operating temperature must be considered.


Typical Performance

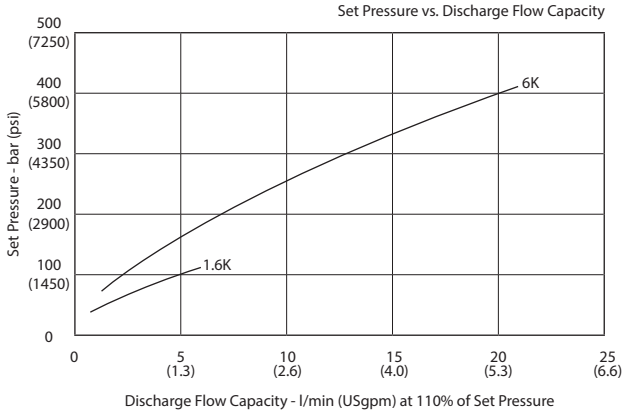

Typical performance based on water
Contact us with system details for an application specific calculation

Installation Diagram



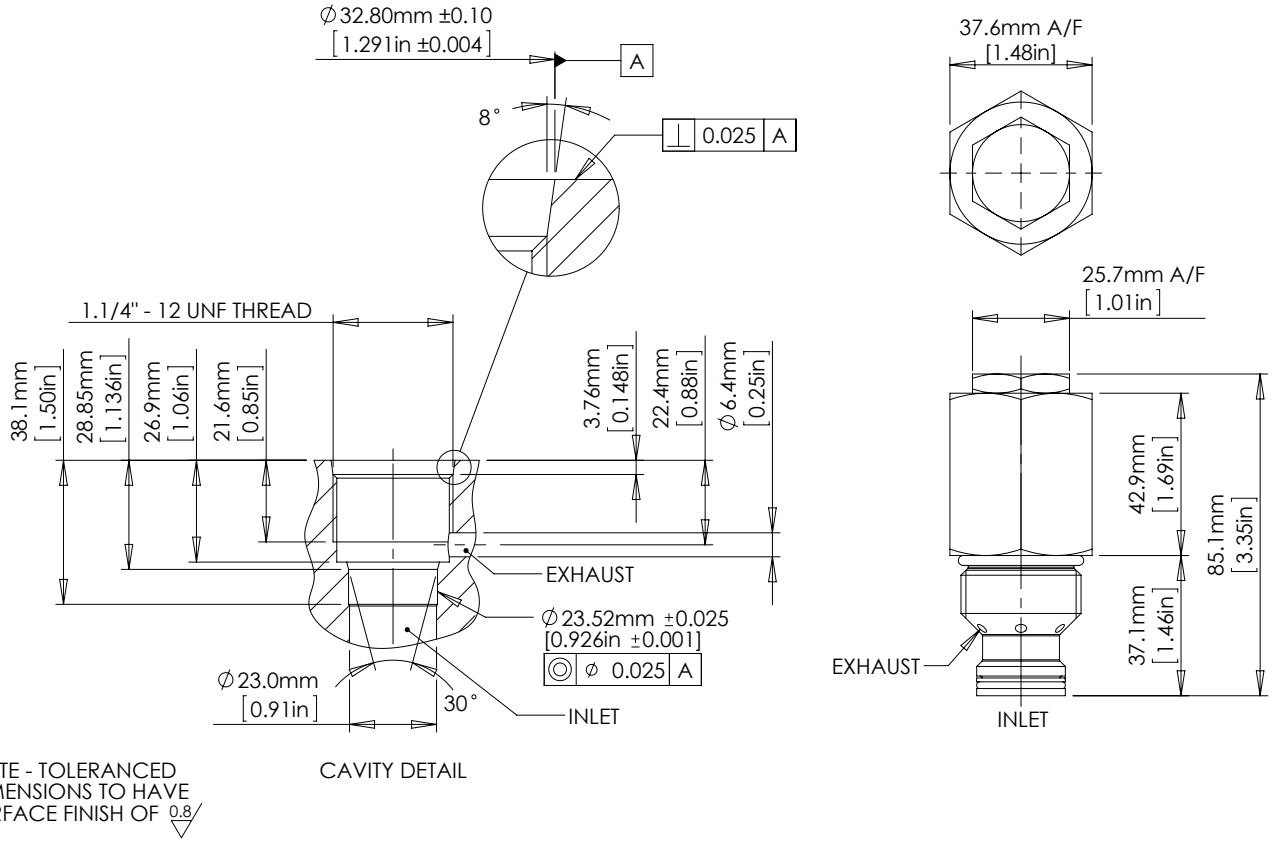

NOTE - TOLERANCED DIMENSIONS TO HAVE SURFACE FINISH OF 0.8

CAVITY DETAIL

Product Selector

RL25C - G - NBR - 1.6K

VALVE TYPE	SEAT TYPE	SEAL OPTIONS	SET PRESSURE RANGE
RL25C	G option must be selected G Soft seats	Leave blank for Viton® seals -10˚C to +80˚C NBR Nitrile seals -30˚C to +80˚C EP EPDM seals -40˚C to +80˚C KLZ Kalrez® seals -25˚C to +80˚C HNBR Hydrogenated Nitrile seals -20˚C to +80˚C Further seal options are available on request	1.6K 28 - 110 bar (400 - 1,600 psi) 6K 69 - 414 bar (1,000 - 6,000 psi) Advise us of set pressure if factory pre-setting is required

Repair and seal kits are available on request

For a seal kit add SK at the end of the model code and for a repair kit add RK