
SM25UF

RELIEF VALVE

1/4"


UP TO 19 BAR 276 PSI




The SM25UF is a vent to atmosphere safety relief valve. The valve is fitted with an elastomeric seat seal to provide excellent leakage performance with both liquids and gases.

The valve is approved as a safety accessory to category IV of the Pressure Equipment Directive, and is suitable for use in the most demanding liquid or gas applications.

- Approved to category IV of the Pressure Equipment Directive (2014/68/EU)
- Pop-open characteristic
- Vents to atmosphere – no need for exhaust side pipework
- Available preset or may be set using internal adjustment
- Fitted with relieving gear
- Virtually zero leakage at 90% of set pressure
- Reseat within the greater of 5 psi or 7.5% of set pressure when valve has opened and not popped
- Reseat within 50% of set pressure once popped
- Repeatability within the greater of 2 psi or ±3% of nominal set pressure

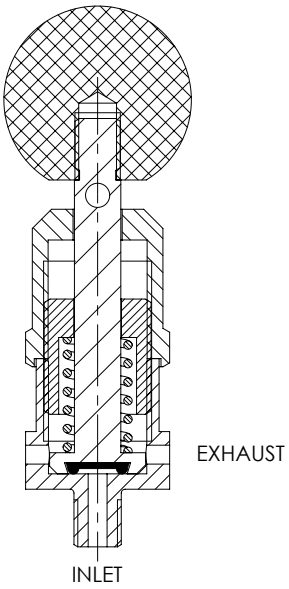

Specifications

BASIC MODEL NUMBER	SM25UF
SYMBOL	 INLET
MAX WORKING PRESSURE	19 bar (276 psi)
ORIFICE SIZE	Ø2.5mm (Ø0.098")
FLUID	Liquids and Gases See materials section
TEMPERATURE RANGE	-10°C to +160°C
PORT SIZE	1/4" x 28 UNF MALE
WEIGHT	0.1 kg (0.2 lb)

Specifications may change without notice


Materials

Externally Exposed and Internally Wetted Parts: 316 and 302 stainless steel.

The standard valve is designed for use with air and plain water. Note that use with water above 100°C is not recommended. Other media compatible with the materials of construction may be used, although consideration must be given to the safety of such fluids when vented to atmosphere.


⚠ The standard valve has Viton® seals. Compatibility with the working fluid at the operating temperature must be considered. Contact us for advice if other seal materials are required.


Typical Performance

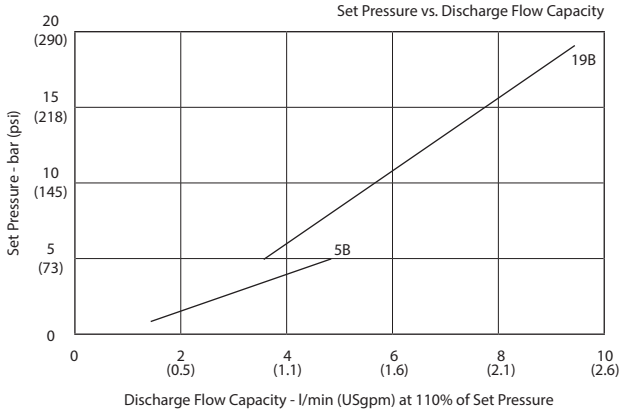

Typical performance based on water
Contact us with system details for an application specific calculation

Installation Diagram



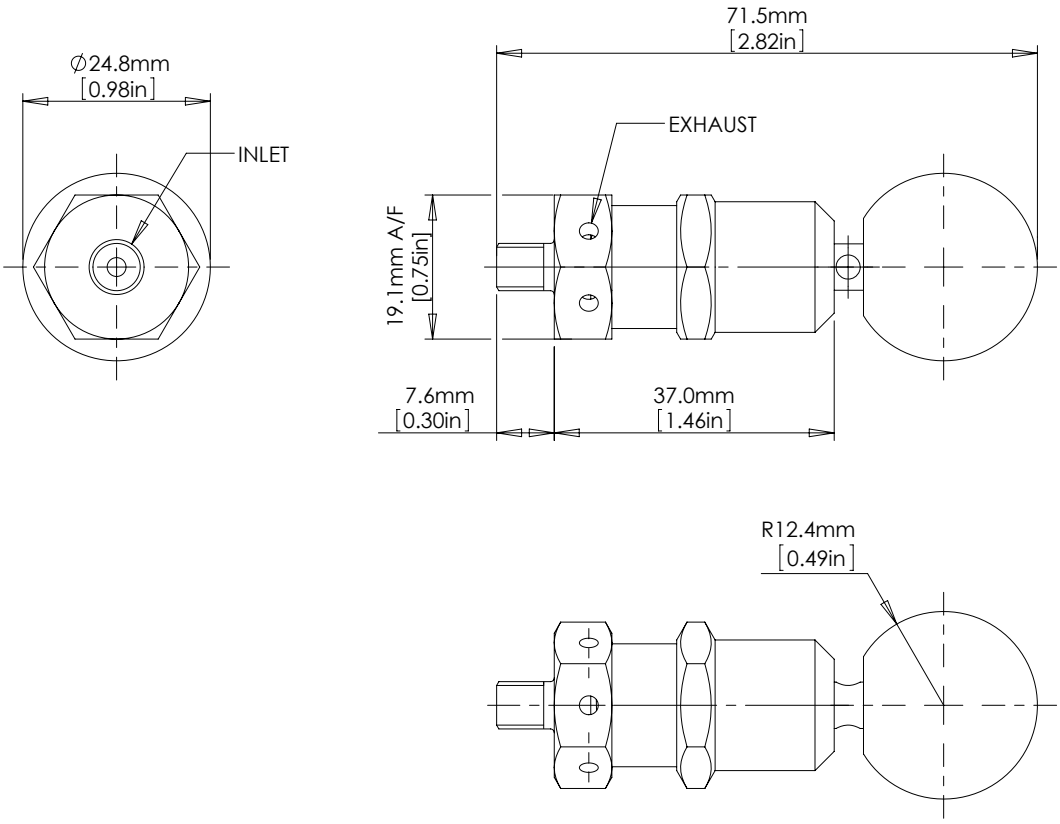

Product Selector

SM25UF - RG - 5B

VALVE TYPE	VALVE OPTIONS	SET PRESSURE RANGE
SM25UF	RG option must be selected **RG** Relieving gear ⚠ Exposure to high and low fluid temperatures will influence handle temperature. Operator safety must be considered ⚠ The safety of venting high and low temperature fluids to atmosphere must be considered	**5B** 0.7 - 5 bar (10 - 73 psi) **19B** 5 - 19 bar (73 - 276 psi) Advise us of set pressure if factory pre-setting is required

Repair and seal kits are available on request

For a seal kit add SK at the end of the model code and for a repair kit add RK