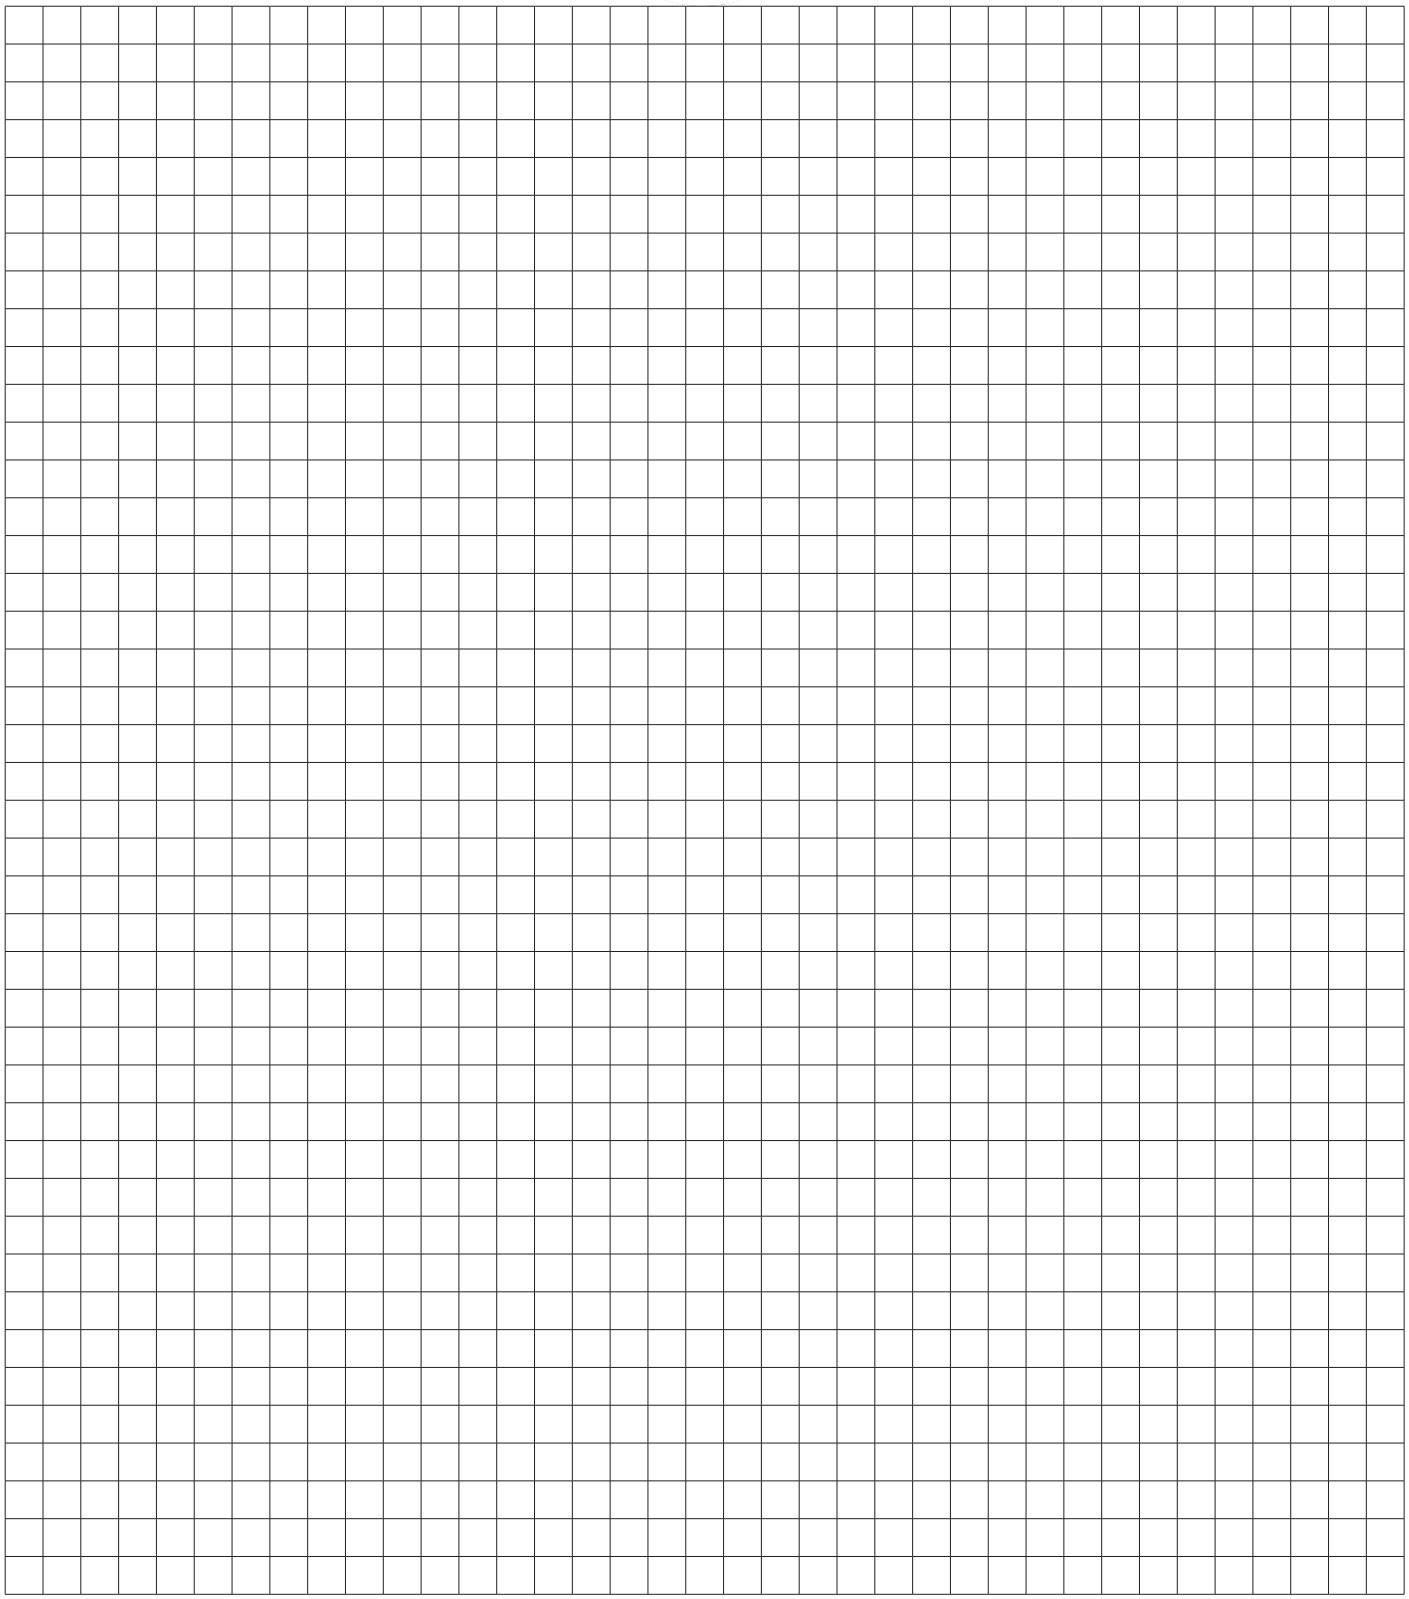


Superb service, product quality and the pursuit of innovative design

Solenoid

Overview


Benefits Checklist

Direct-acting and pilot-operated switching in stainless steel.

Topside and subsea coils, including ATEX / IECEx options.

Manual override and reset options on many types.

Low-watt coils from 3 watts for remote and battery systems.



Solenoid valves Pages ?? - ??

Function

Solenoid valves switch flow in response to an electrical signal. The range runs from small low-pressure pneumatic 2/2 valves to 1" directional valves for high-pressure liquids.

Key features

2/3 port designs, hazardous-area and subsea thruster options, and pressures to 690 bar (10,000 psi) on selected types. Pressure rating is reduced with gases.

Applications

Hydraulic and pneumatic panels, wellhead and ESD systems, and any circuit that needs remote electrical operation of a BiS valve.

	Nominal Size	Pressure	Media	Valve Type	Page
Solenoid valves	1/4"	414 bar (6,000 psi)*	Liquids & Gases	2/3DS25	?
	3/8"	414 bar (6,000 psi)*	Liquids & Gases	2/3DS37	?
	1/4"	690 bar (10,000 psi)	Liquids only	2/3DS20/25	?
	1/4"	690 bar (10,000 psi)	Liquids only	CS20	?

* NOTE - Pressure rating is reduced with gases