STEX1


SOLENOID THRUSTER

n/a


N/A

The STEX1 ss steel ATEX-approved flameproof EEx d IIC solenoid






24 V DC, 15.8 W max. T5 -10°C to +40°C, T4 -10°C to +60°C. IP66.

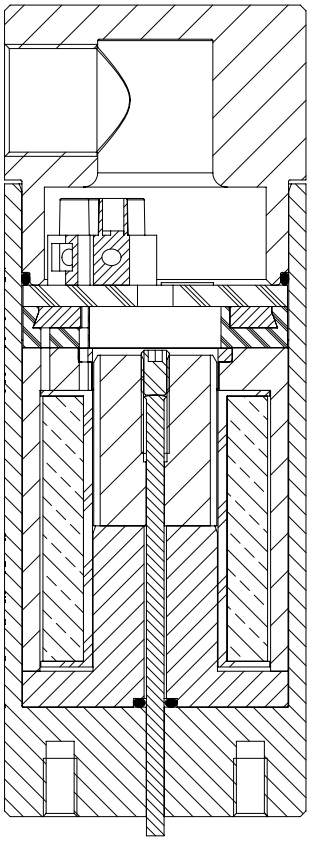

Specifications

BASIC MODEL NUMBER	STEX1
SYMBOL	
MAX WORKING PRESSURE	n/a (n/a)
MAX WORKING PRESSURE	n/a (n/a)
FLUID	n/a See materials section
TEMPERATURE RANGE	See Product Selector opposite and Technical Data section
PORT SIZE	n/a
WEIGHT	2.8 kg (6.2 lb)


Specifications may change without notice

Materials

⚠ The standard valve has Viton® seals. Further seal options are available via the Product Selector. Compatibility with the working fluid at the operating temperature must be considered.

Typical Performance

Installation Diagram

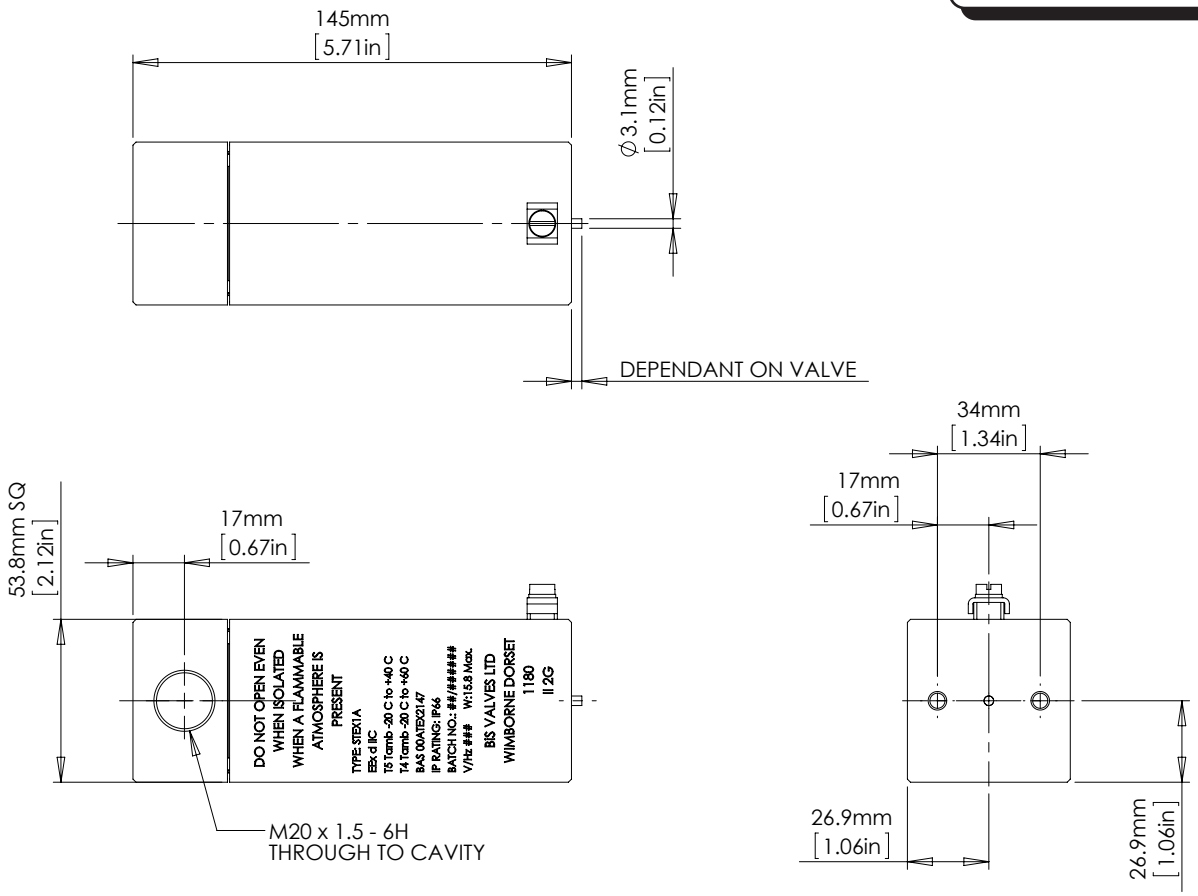

Product Selector

STEX1 ? - ? - n/a

VALVE TYPE	PORTING OPTIONS	SEAL OPTIONS	CRACKING PRESSURE
		Leave blank for Viton® seals -10˚c to +120˚c	
STEX1	? n/a	?	n/a n/a (n/a) ?

Repair and seal kits are available on request

For a seal kit add SK at the end of the model code and for a repair kit add RK