
TS25C

SAFETY RELIEF VALVE


1/4" UP TO 40 BAR 580 PSI




The TS25C is a cartridge style safety relief valve for use in manifold applications.
Designed with an elastomeric seat seal, the valve combines excellent leakage performance with a high discharge flow capacity from its pop-open characteristic.

The valve is approved as a safety accessory to category IV of the Pressure Equipment Directive, and is suitable for use in the most demanding liquid or gas applications.

- Approved to category IV of the Pressure Equipment Directive (2014/68/EU)
- Pop-open characteristic for maximum discharge capacity
- Available preset with hidden external adjustment
- Compatible manifolds and flanged pipework available. Contact us for advice
- Wire locking and tagging available on request
- Virtually zero leakage at 90% of set pressure
- Reseat within the greater of 5 psi or 7.5% of set pressure when valve has opened and not popped
- Reseat within 50% of set pressure once popped
- Repeatability within the greater of 2 psi or ±3% of nominal set pressure

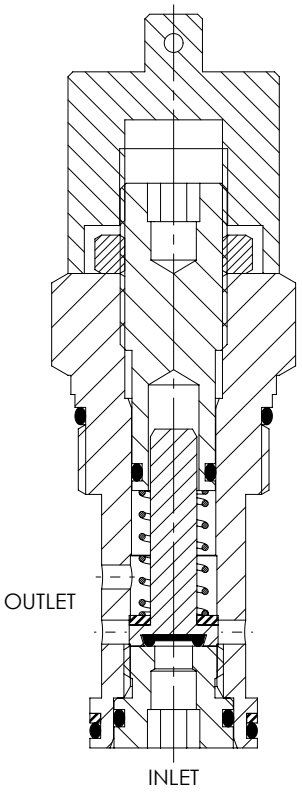

Specifications

BASIC MODEL NUMBER	TS25C
SYMBOL	
MAX WORKING PRESSURE	40 bar (580 psi)
MAX OUTLET PORT PRESSURE	10 bar (145 psi) Note: Any outlet port pressure is directly additive to the set pressure
ORIFICE SIZE	Ø5.0mm (Ø0.197")
FLUID	Liquids and Gases See materials section
TEMPERATURE RANGE	See Product Selector opposite and Technical Data section
NOMINAL SIZE	1/4"
WEIGHT	0.3 kg (0.7 lb)

Specifications may change without notice


Materials

Externally Exposed Parts: 316 stainless steel.
Internally Wetted Parts: 316 and 302 stainless steel, and acetal.

The standard valve is designed for use with air, nitrogen, sweet natural gas, mineral oil, water glycols and plain water, and may also be used with a wide variety of media compatible with the materials of construction. Other material options are available, contact us for advice. Note that use with water above 100°C is not recommended.


⚠ The standard valve has Viton® seals. Further seal options are available via the Product Selector. Compatibility with the working fluid at the operating temperature must be considered.


Typical Performance

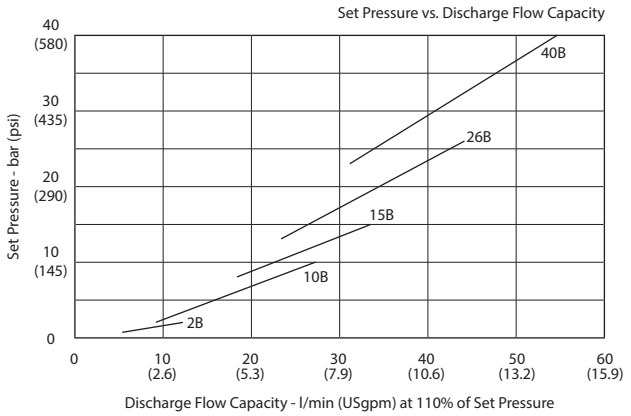


Typical performance based on water
Contact us with system details for an application specific calculation

Installation Diagram



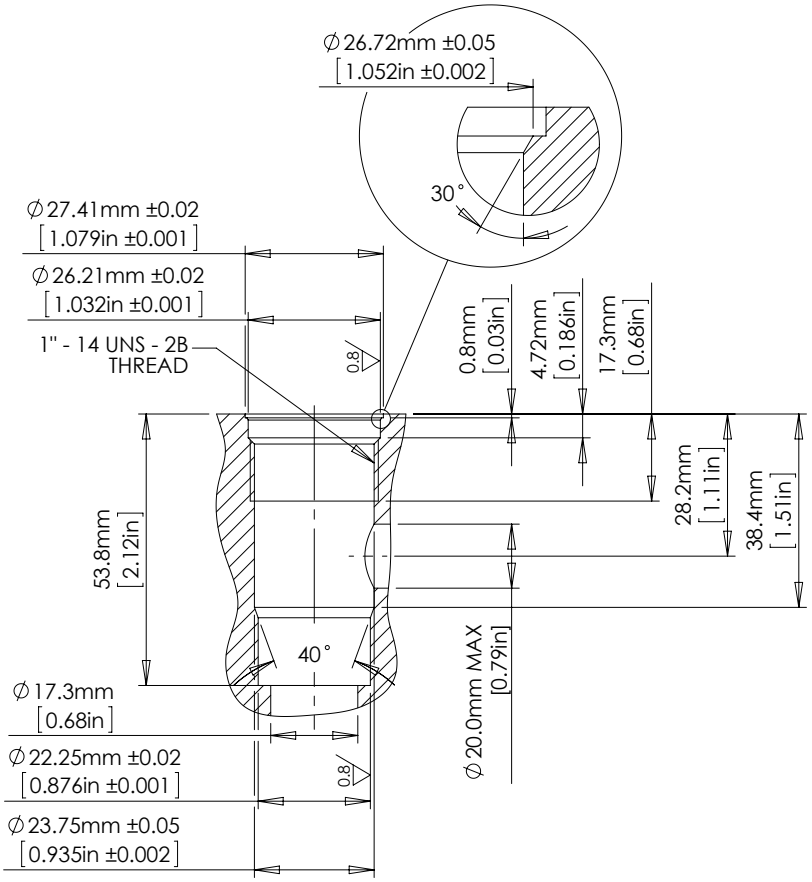

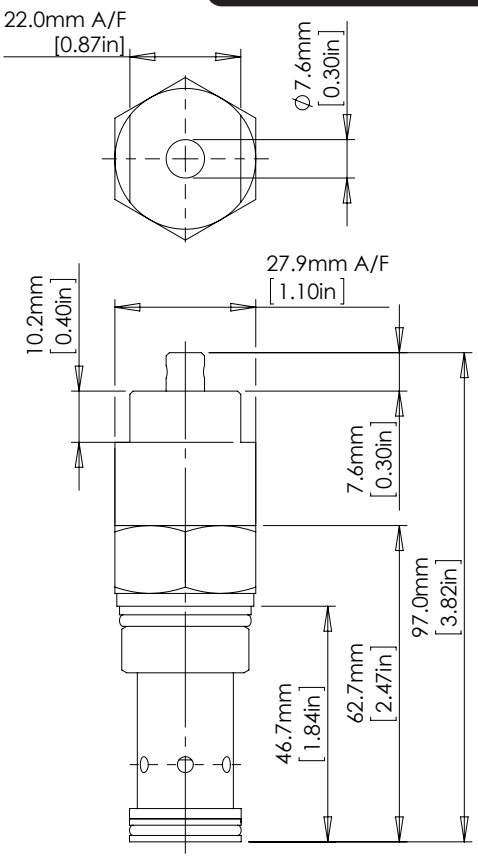

Product Selector

TS25C - NBR - 2B

VALVE TYPE

TS25C

Repair and seal kits are available on request

For a seal kit add SK at the end of the model code and for a repair kit add RK

SEAL OPTIONS

Leave blank for Viton® seals -10˚C to +120˚C

NBR
Nitrile seals
-30˚C to +105˚C

EP
EPDM seals
-45˚C to +120˚C

KLZ
Kalrez® seals
-25˚C to +120˚C

HNBR
Hydrogenated Nitrile seals
-20˚C to +120˚C

Further seal options are available on request

SET PRESSURE RANGE

2B
0.7 - 2 bar
(10 - 29 psi)

10B
2 - 10 bar
(29 - 145 psi)

15B
8 - 15 bar
(116 - 218 psi)

26B
13 - 26 bar
(189 - 377 psi)

40B
23 - 40 bar
(334 - 580 psi)

Advise us of set pressure if factory pre-setting is required