
– UL75/50 –


?

1/2” UP TO 207 BAR 3,000 PSI




The UL75/50 is a 1/2” unloader valve, actuated by pneumatic or low-pressure pilot, lever, push button, or remotely by venting the auxiliary line.

- Stainless Steel Construction
- Suitable for liquid use only
- Various actuation types available
- Version available for subsea use
- Various porting options available

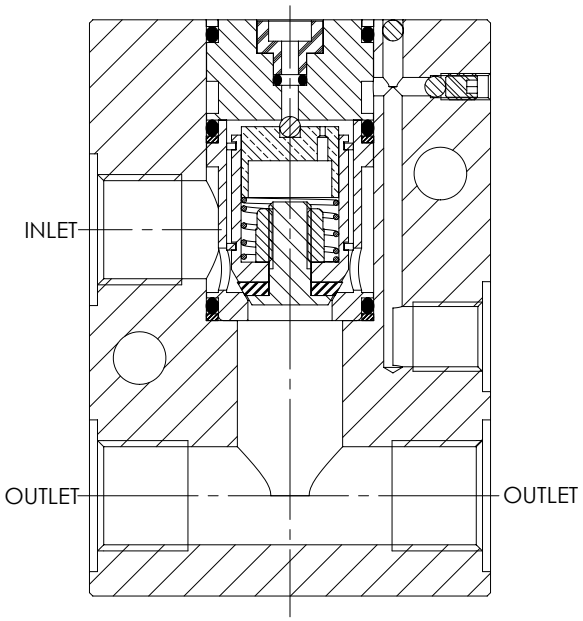

Specifications

BASIC MODEL NUMBER	UL75/50
SYMBOL	
MAX WORKING PRESSURE	207 bar (3,000 psi)
CV (FLOW CAPACITY)	?
PILOT RATIO	?
FLUID	Liquids See materials section
TEMPERATURE RANGE	See Product Selector opposite and Technical Data section
PORT SIZE	1/2”
WEIGHT	2.5 kg (5.5 lb)

Specifications may change without notice

Materials

Externally Exposed Parts: 316 Stainless Steel


Internally Wetted Parts: 316, 440C and 302 Stainless Steel and Acetal

The standard valve is designed for use with mineral oil and water glycols, and may also be used with a wide variety of media compatible with the materials of construction.

⚠ The standard valve has Viton® seals. Further seal options are available via the Product Selector. Compatibility with the working fluid at the operating temperature must be considered.

Typical Performance

Configuration Diagram



Product Selector

UL75/50 P - SW - NBR - 3K

VALVE TYPE	PORTING OPTIONS	VALVE OPTIONS	SEAL OPTIONS	MAX WORKING PRESSURE
UL75/50	P 1/2" BSPP female N 1/2" NPT female	Leave blank if not required SW Suitable for subsea use SWD Materials compatible with seawater	Leave blank for Viton® seals -10˚c to +120˚c NBR Nitrile seals -30˚c to +105˚c HNBR Hydrogenated Nitrile -20˚c to +120˚c KLZ Kalrez® seals -25˚c to +200˚c Further seal options are available on request	3K 207 bar (3,000 psi) Liquid


Repair and seal kits are available on request


For a seal kit add SK at the end of the model code and for a repair kit add RK

UL75/50


?


UL75/50-H0

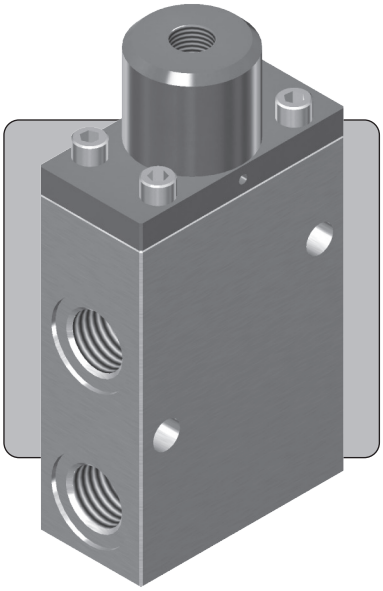

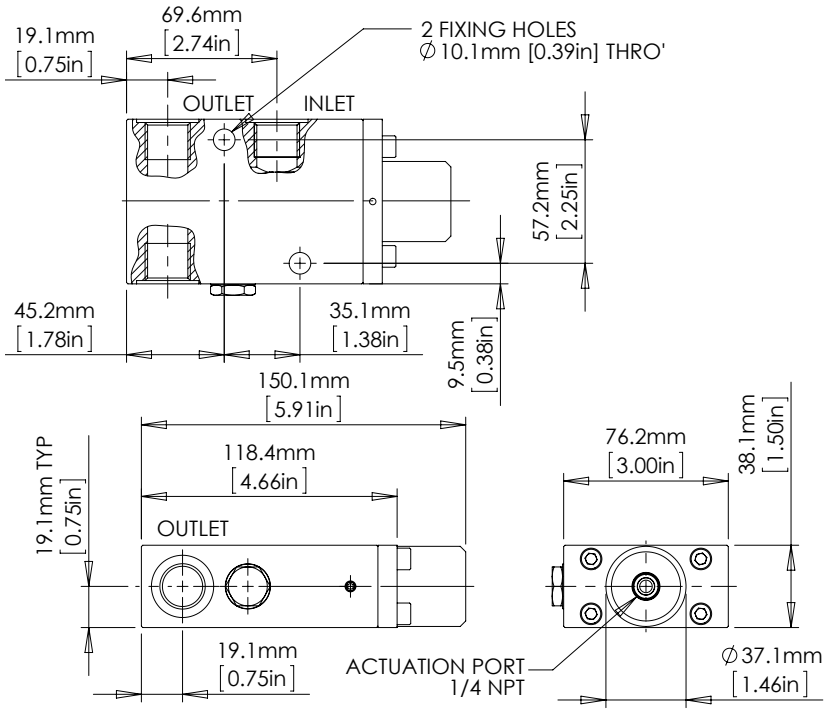


UL75/50-L

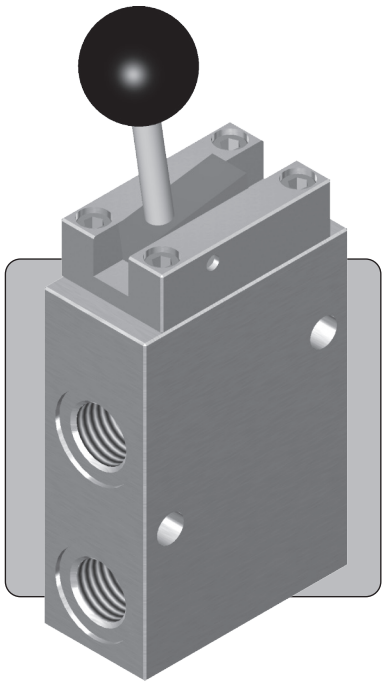


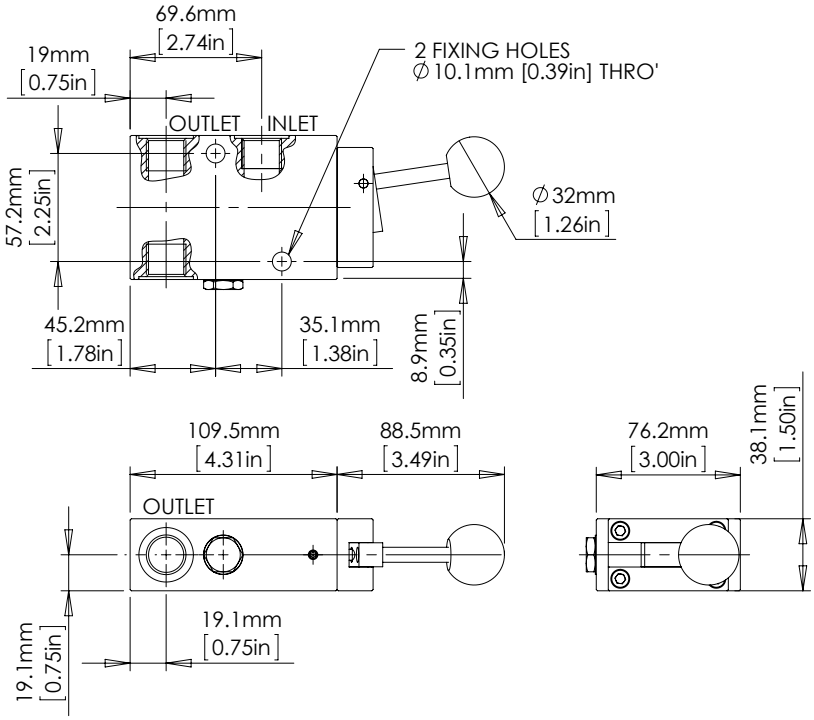

VALVES

UL75/50-PB

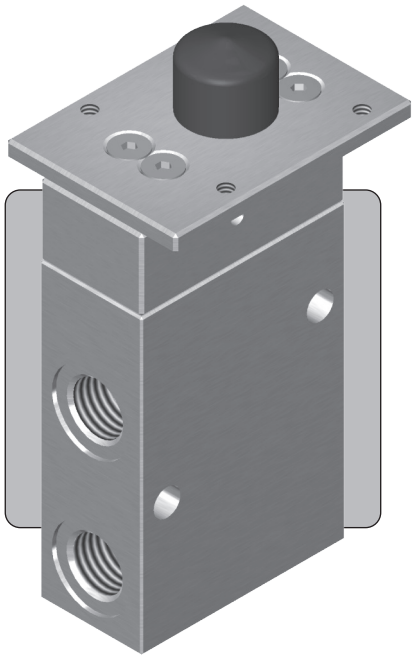

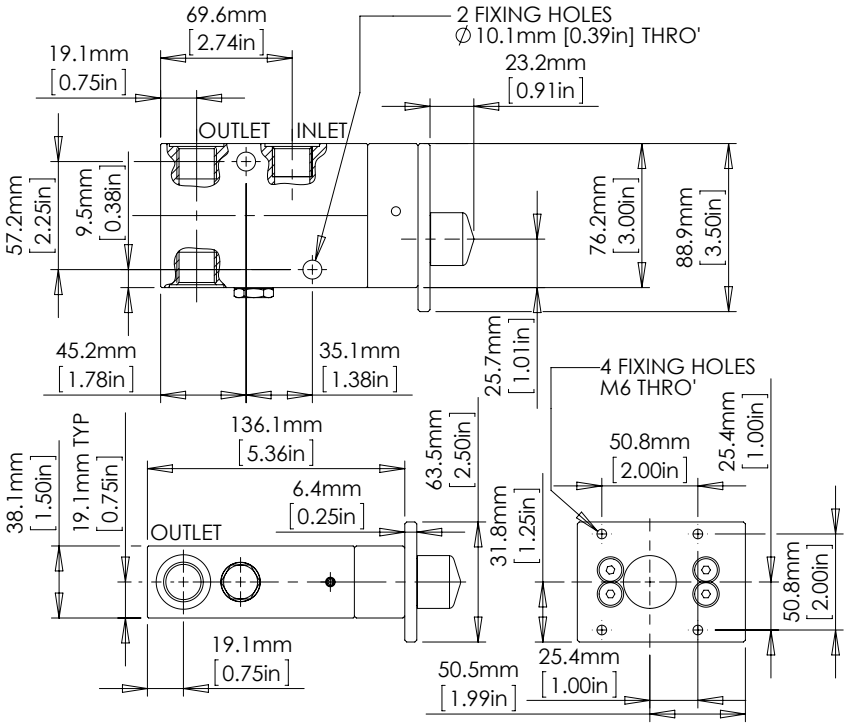

UL75/50-PR



