
V1-37


?

3/8″ UP TO 1,379 BAR 20,000 PSI




The V1-37 is a 3/8″ stainless steel pilot operated check valve for pressures up to 20,000 psi with liquid and 5,000 psi with gas.

- Stainless Steel Construction
- Suitable for liquid use only
- Various actuation types available
- Version available for subsea use
- Various porting options available

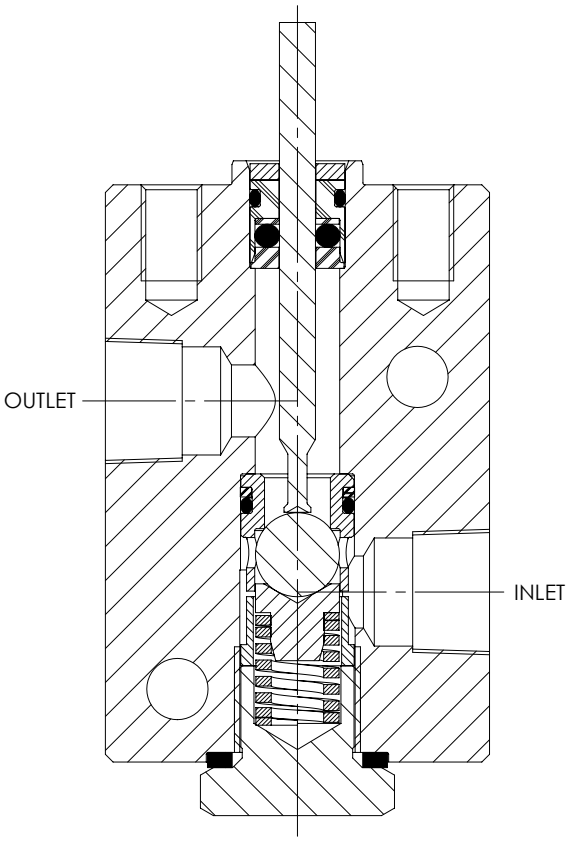

Specifications

BASIC MODEL NUMBER	V1-37
SYMBOL	
MAX WORKING PRESSURE	1,379 bar (20,000 psi)
CV (FLOW CAPACITY)	?
PILOT RATIO	?
FLUID	Liquids only See materials section
TEMPERATURE RANGE	See Product Selector opposite and Technical Data section
PORT SIZE	3/8″
WEIGHT	1.75 kg (3.9 lb)

Specifications may change without notice

Materials


Externally Exposed Parts: 316 Stainless Steel

Internally Wetted Parts: 316, 440C and 302 Stainless Steel and Acetal

The standard valve is designed for use with mineral oil and water glycols, and may also be used with a wide variety of media compatible with the materials of construction.


⚠ The standard valve has Viton® seals. Further seal options are available via the Product Selector. Compatibility with the working fluid at the operating temperature must be considered.


Typical Performance

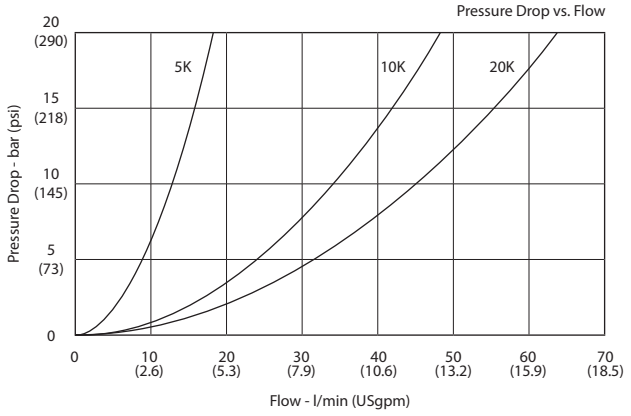

Typical performance based on water

Configuration Diagram



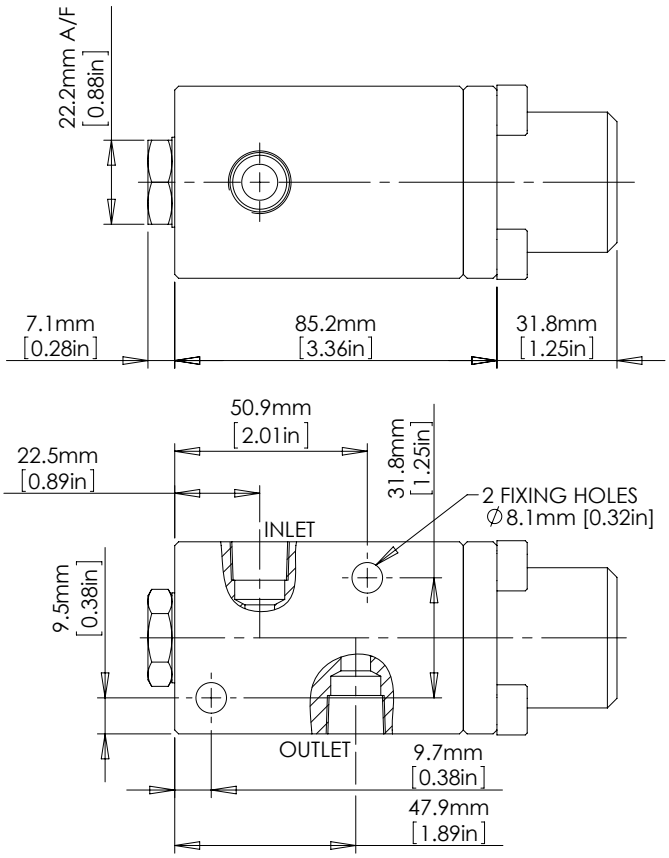

Product Selector

V1-37 P - SW - NBR - 20K

VALVE TYPE	PORTING OPTIONS	VALVE OPTIONS	SEAL OPTIONS	MAX WORKING PRESSURE
V1-37	P 3/8" BSPP female N 3/8" NPT female	Leave blank if not required SW Suitable for subsea use SWD Materials compatible with seawater	Leave blank for Viton® seals -10˚c to +120˚c NBR Nitrile seals -30˚c to +105˚c HNBR Hydrogenated Nitrile -20˚c to +120˚c KLZ Kalrez® seals -25˚c to +200˚c Further seal options are available on request	20K 1,379 bar (20,000 psi) Liquid


Repair and seal kits are available on request


For a seal kit add SK at the end of the model code and for a repair kit add RK

V1-37


PILOT OPERATED CHECK VALVE


V1-37-ASI

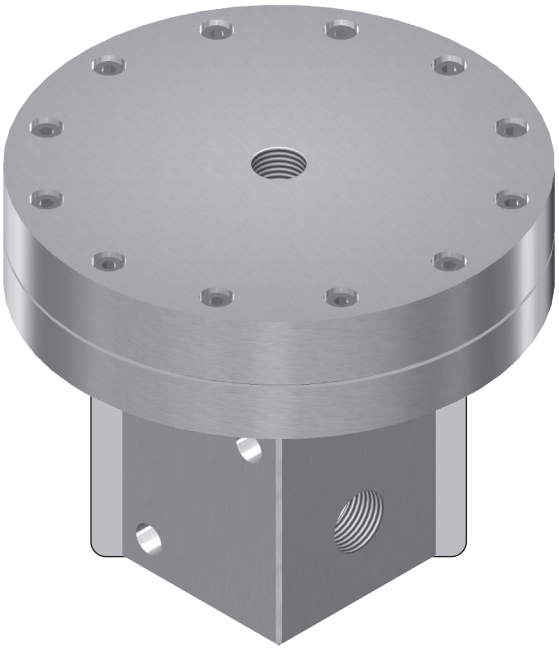

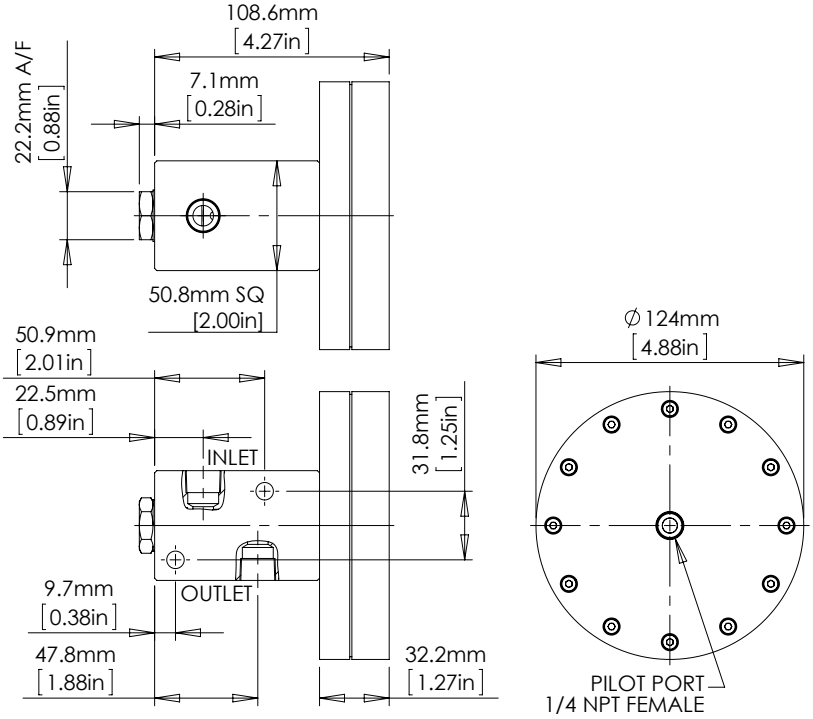



V1-37-DL

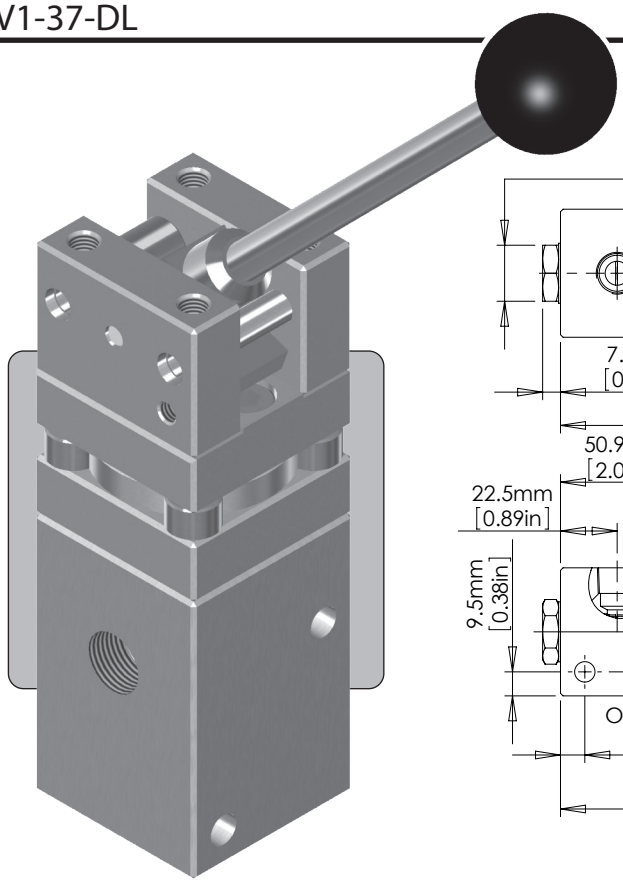

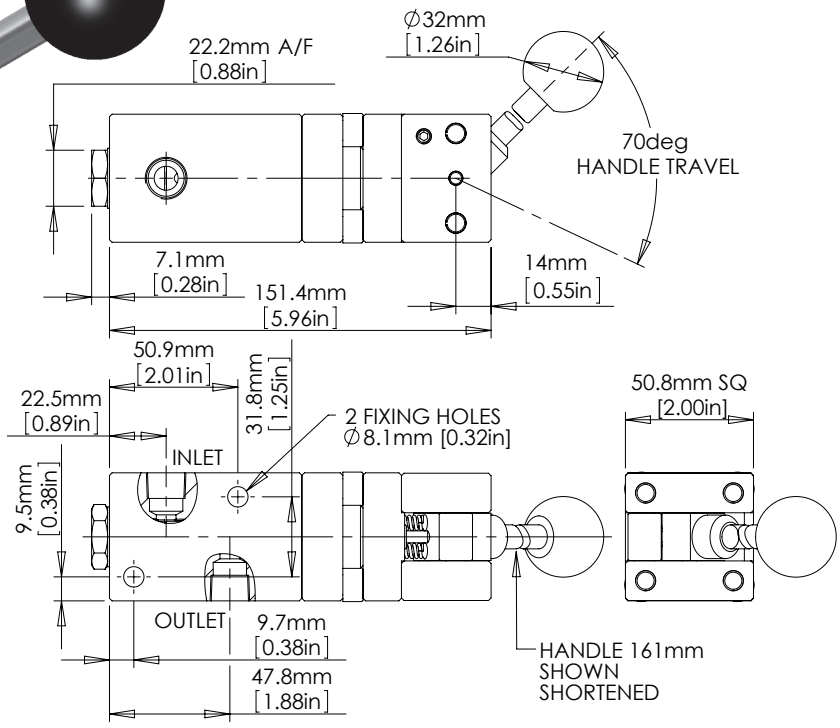



V1-37-L

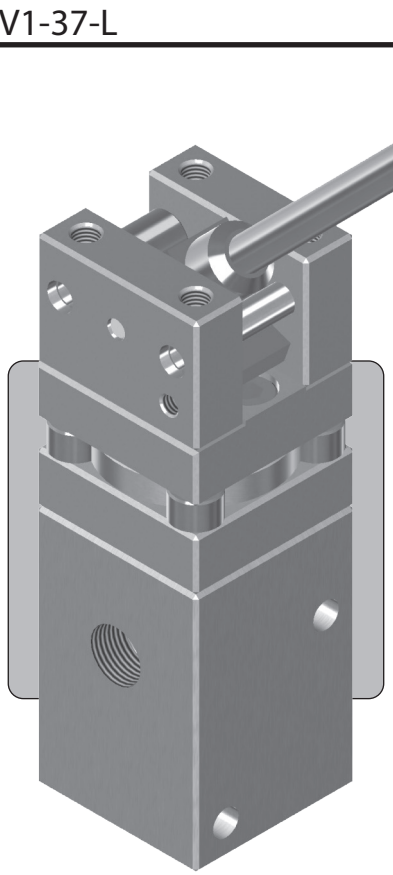

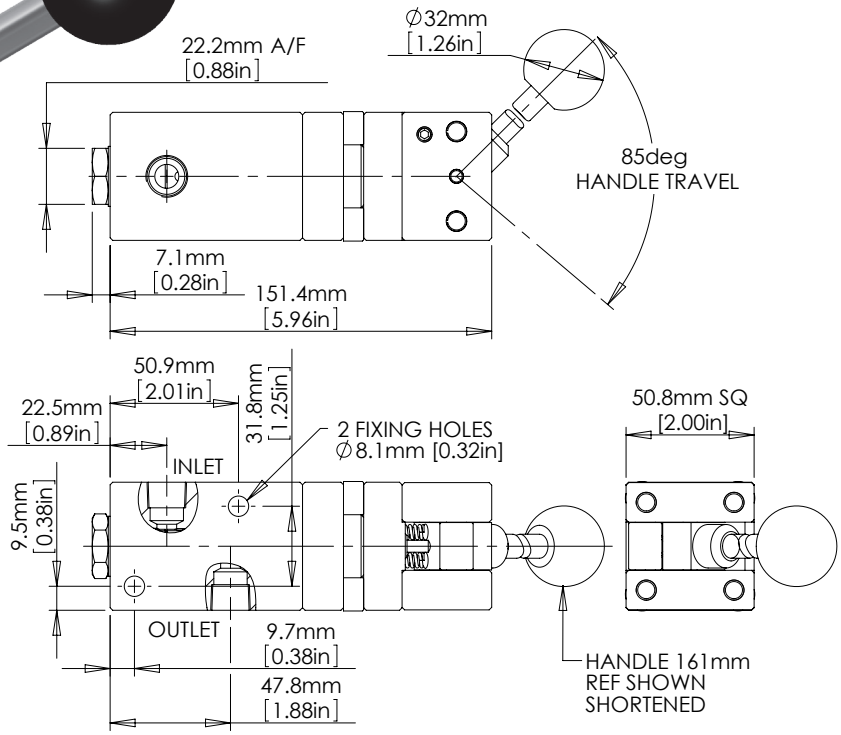
Ø32mm
[1.26in]
22.2mm A/F
[0.88in]
85deg
HANDLE TRAVEL
7.1mm
[0.28in]
151.4mm
[5.96in]
50.9mm
[2.01in]
31.8mm
[1.25in]
22.5mm
[0.89in]
2 FIXING HOLES
Ø8.1mm [0.32in]
50.8mm SQ
[2.00in]
INLET
9.5mm
[0.38in]
OUTLET
9.7mm
[0.38in]
47.8mm
[1.88in]
HANDLE 161mm
REF SHOWN
SHORTENED

V1-37-M

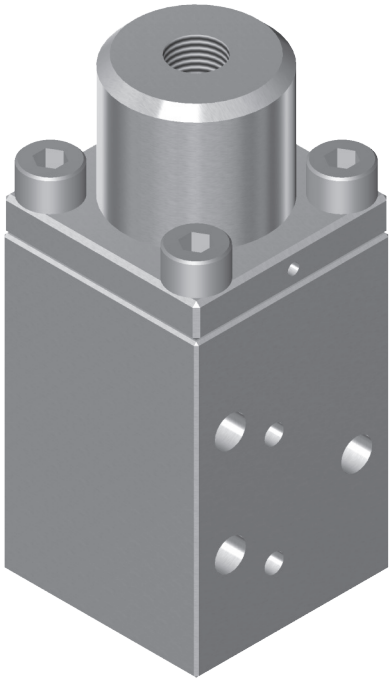

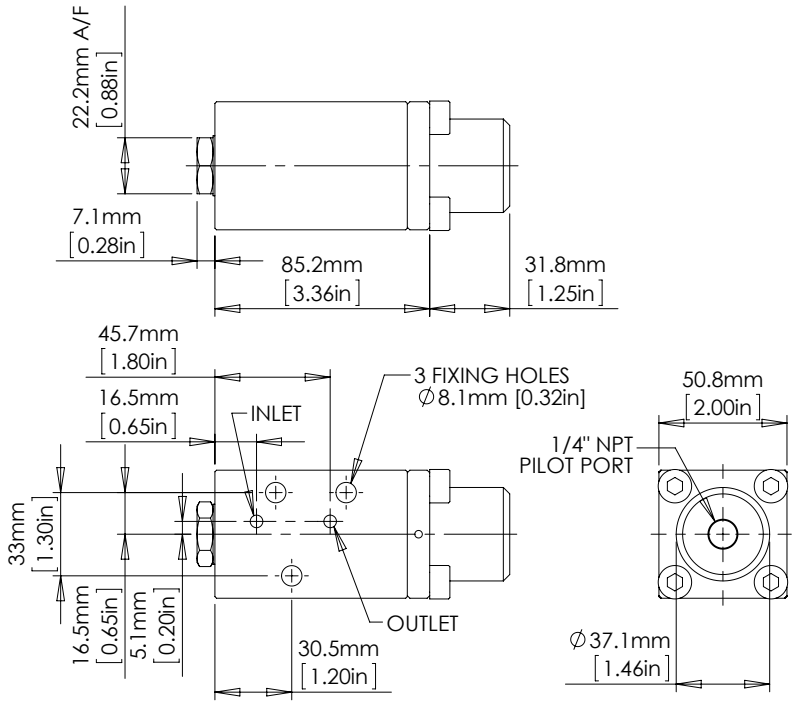
22.2mm A/F
[0.88in]
7.1mm
[0.28in]
85.2mm
[3.36in]
31.8mm
[1.25in]
45.7mm
[1.80in]
16.5mm
[0.65in]
INLET
3 FIXING HOLES
Ø8.1mm [0.32in]
50.8mm
[2.00in]
1/4" NPT
PILOT PORT
33mm
[1.30in]
16.5mm
[0.65in]
5.1mm
[0.20in]
OUTLET
30.5mm
[1.20in]
Ø37.1mm
[1.46in]