
XFMF25

METERING VALVE


1/4"

UP TO 552 BAR 8,000 PSI




The XFMF25 is a very fine flow metering valve, adjustable via a micrometer style handle. The valve is marked with a preferred direction of flow, but it may be used in the opposite direction to provide bi-directional speed control of a cylinder or actuator, although the level of metering will vary depending on direction.
Note that this valve is not intended to provide tight shut-off when closed.

- Very fine flow control valve for metering applications
- Micrometer style adjustment with engraved graduations
- Lockable adjustment
- Non-rotating valve stem protects valve seat
- Suitable for short term subsea use
- Suitable for liquid or gas
- Suitable for use with air, nitrogen, sweet natural gas, mineral oils, water glycols and plain water
- Suitable for many other media. Contact us for advice
- Cartridge and manifold mount versions available. Contact us for advice
- Various porting and seal options available

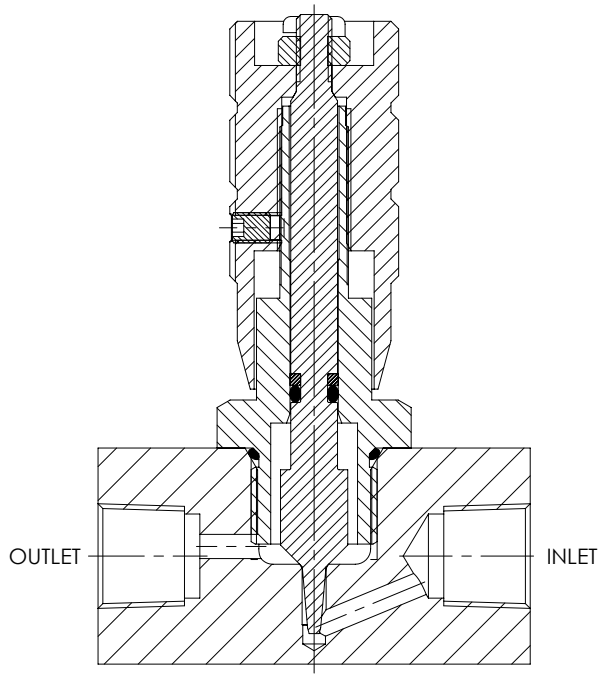

Specifications

BASIC MODEL NUMBER	XFMF25
SYMBOL	
MAX WORKING PRESSURE (LIQUID)	552 bar (8,000 psi)
MAX WORKING PRESSURE (GAS)	276 bar (4,000 psi)
CV (FLOW CAPACITY)	Up to 0.20 See Typical Performance Graph
FLUID	Liquids and Gases See materials section
TEMPERATURE RANGE	See Product Selector opposite and Technical Data section
PORT SIZE	1/4"
WEIGHT	0.45 kg (1.0lb)

Specifications may change without notice

Materials


Externally Exposed Parts: 316, 304 and 17-4 PH stainless steel.

Internally Wetted Parts: 316 and 17-4 PH stainless steel and PTFE.

The standard valve is designed for use with air, nitrogen, sweet natural gas, mineral oil, water glycols and plain water and may also be used with a wide variety of media compatible with the materials of construction. Other material options are available. Contact us for advice.


⚠ The standard valve has Viton® seals. Further seal options are available via the Product Selector. Compatibility with the working fluid at the operating temperature must be considered.

Typical Performance

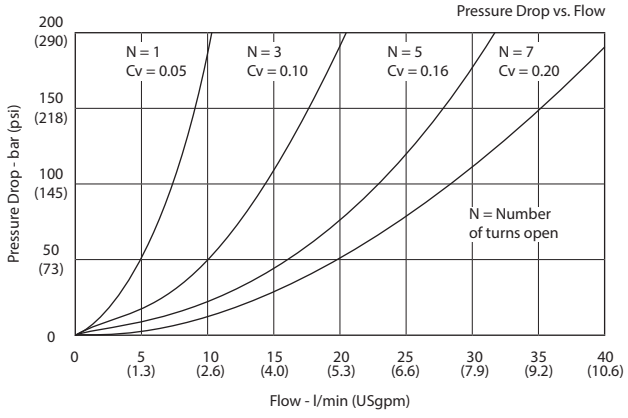

Typical performance based on water

Installation Diagram

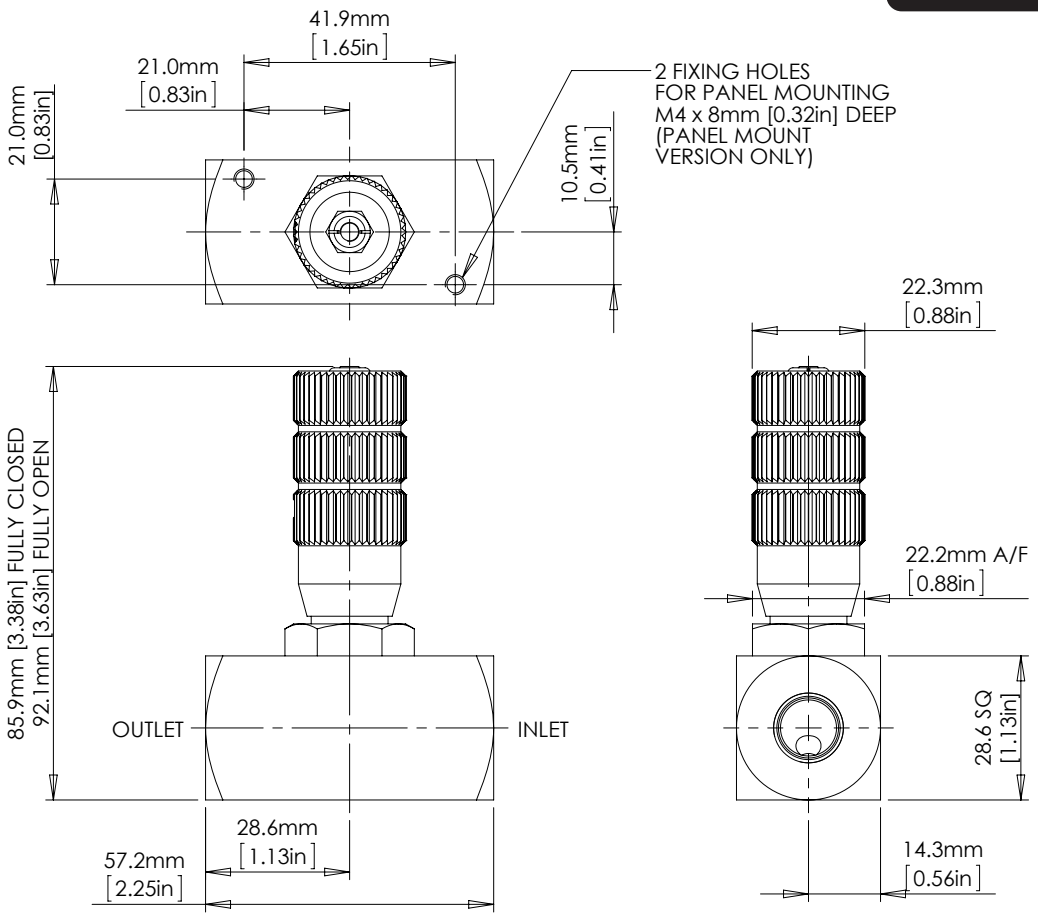

Product Selector

XFMF25 P - PM - NBR - 8K

VALVE TYPE	PORTING OPTIONS	VALVE OPTIONS	SEAL OPTIONS	MAX WORKING PRESSURE
		Leave blank if not required	Leave blank for Viton® seals -10˚C to +120˚C	
XFMF25	P 1/4" BSPP female N 1/4" NPT female	PM Panel mount	NBR Nitrile seals -30˚C to +105˚C HNBR Hydrogenated Nitrile seals -20˚C to +120˚C EP EPDM seals -45˚C to +120˚C KLZ Kalrez seals -25˚C to +120˚C	8K 552 bar (8,000 psi) Liquid 276 bar (4,000 psi) Gas

Repair and seal kits are available on request

For a seal kit add SK at the end of the model code and for a repair kit add RK

Further seal options are available on request

⚠ Exposure to high and low fluid temperatures will influence handle temperature. Operator safety must be considered

Catalogue also available on digital media
Visit our website for a full online search facility
www.bisvalves.co.uk

BIS VALVES
The Specifier's Catalogue