
YV25

YIELD VALVE

1/4″

UP TO 828 BAR
12,000 PSI




The YV25 is a ¼″ nominal bore check valve with integral reverse thermal relief function. It will allow flow in one direction, and blocks flow in the opposite direction, unless a preset pressure differential is exceeded.


The valve may be used in applications where pressure trapped on the outlet side of the check valve is subject to thermal expansion that would cause local over-pressurisation of the trapped volume. It is essential that the volume on the inlet side of the valve is able to accept any relieved fluid without inlet side pressure rising significantly, hence the valve is typically only suitable for systems where an accumulator is directly connected to the piping on the inlet side of the valve.

The YV25 is not classed as a safety accessory within the Pressure Equipment Directive (97/23/EC) and may only be used to protect pressure equipment falling within Article 3, Clause 3 of the Directive.

- Check or Non-Return valve with integral reverse thermal relief function
- Suitable for use with mineral oils, water glycols & plain water
- Suitable for many other media, contact us for advice
- Various porting and seal options available

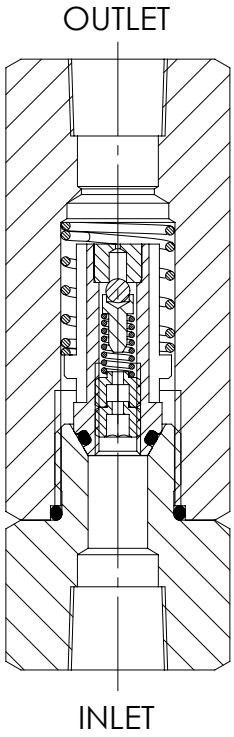

Specifications

BASIC MODEL NUMBER	YV25
SYMBOL	
MAX WORKING PRESSURE (LIQUID)	828 bar (12,000 psi)
CHECK VALVE CV (FLOW CAPACITY)	0.8
RELIEF ORIFICE SIZE	Ø0.6mm (Ø0.025″)
FLUID	Liquids only See materials section
TEMPERATURE RANGE	See Product Selector opposite and Technical Data section
PORT SIZE	1/4″
WEIGHT	0.3 kg (0.7 lb)

Specifications may change without notice

Materials


Externally Exposed Parts: 316 stainless steel

Internally Wetted Parts: 316 and other 300 series stainless steels, 17-4 PH stainless steel and silicon nitride.

The standard valve is designed for use with mineral oil, water glycols and plain water, but may be used with a wide variety of media compatible with the materials of construction. For further advice, please contact us.


⚠ The standard valve has Viton® seals. Further seal options are available via the Product Selector. Compatibility with the working fluid at the operating temperature must be considered.


Typical Performance

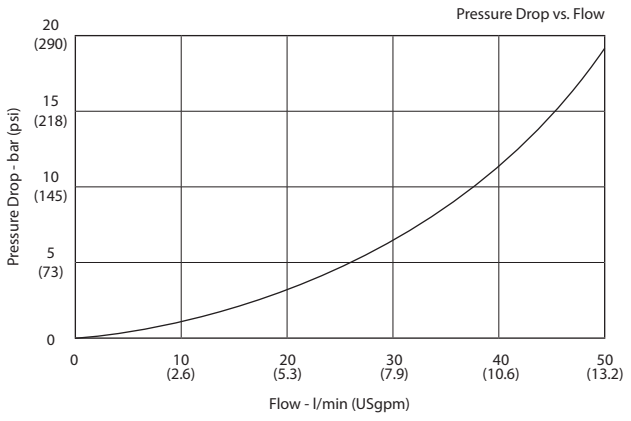

Typical performance based on water

Installation Diagram



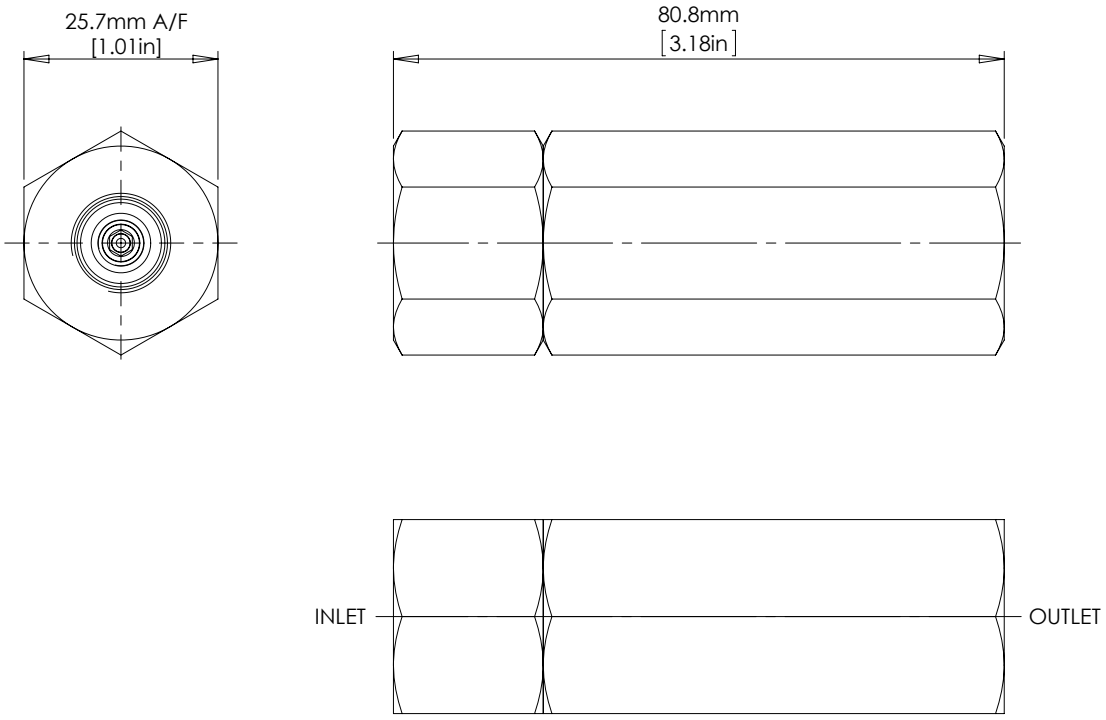

Product Selector

YV25 P - NBR - 0.6 / 12K

VALVE TYPE	PORTING OPTIONS	SEAL OPTIONS	RELIEF SETTING RANGE	MAX WORKING PRESSURE
YV25	P 1/4" BSPP female N 1/4" NPT female	Leave blank for Viton® seals -10˚C to +120˚C NBR Nitrile seals -30˚C to +105˚C EP EPDM seals -45˚C to +120˚C KLZ Kalrez® seals -25˚C to +120˚C HNBR Hydrogenated Nitrile seals -20˚C to +120˚C Further seal options are available on request	0.6 13.8 - 41 bar (200 - 600 psi) 1.2 34.5 - 83 bar (500 - 1,200 psi) 2 69 - 138 bar (1,000 - 2,000 psi) Required setting must be advised when ordering	12K 828 bar (12,000 psi) Liquid

Repair and seal kits are available on request

For a seal kit add SK at the end of the model code and for a repair kit add RK