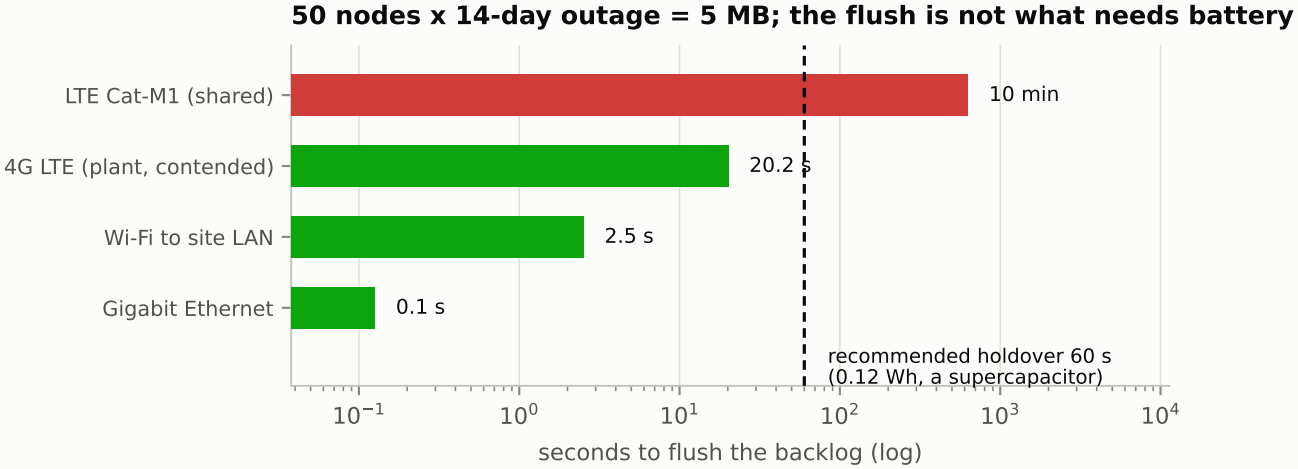
50 nodes x 14-day outage = 5 MB; the flush is not what needs battery
LTE Cat-M1 (shared)
10 min
4G LTE (plant, contended)
20.2 s
Wi-Fi to site LAN
2.5 s
Gigabit Ethernet
0.1 s
recommended holdover 60 s
(0.12 Wh, a supercapacitor)
10^{-1}
10^{0}
10^{1}
10^{2}
10^{3}
10^{4}
seconds to flush the backlog (log)