Mineral Fiber Ceilings

CertainTeed
SAINT-GOBAIN

Ceilings

PERFORMA®

Fine Fissured
VOC Compliant

LOW VOC

**$**$$$

LEED® v4

- ● MR: Environmental Product Declarations (EPDs)
- ● MR: Sourcing Raw Materials
- ● MR: Material Ingredients (HPDs)
- ● IEQ: Daylight
- ● IEQ: Low-Emitting Materials
- ○ IEQ: Prereq. Min. Acoustic Performance (Schools)
- ○ IEQ: Acoustic Performance
- ● MR: PBT Source Reduction (Healthcare)
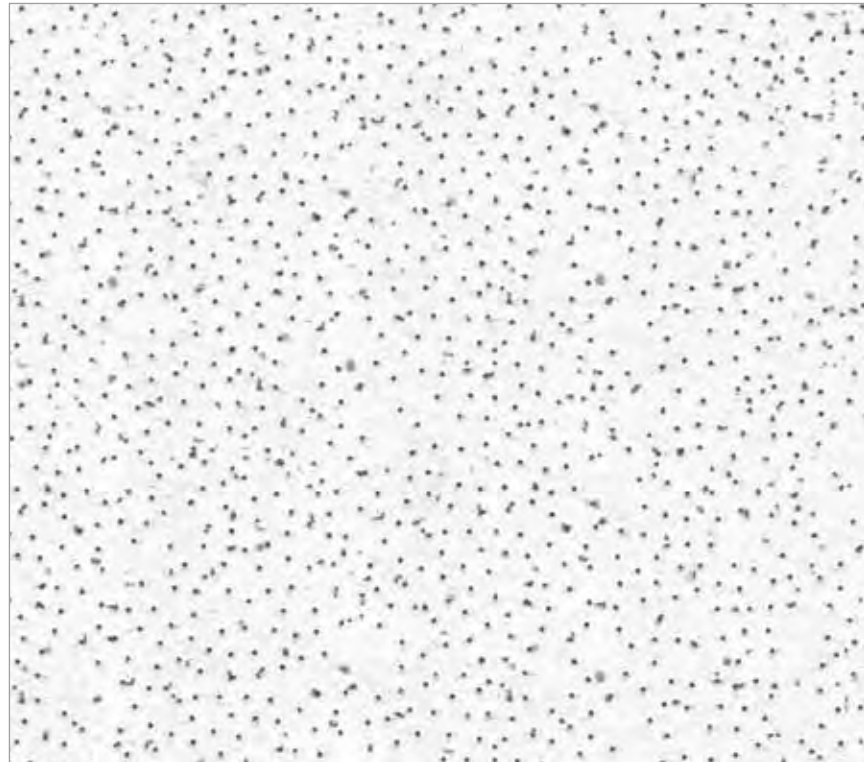- ○ IEQ: Interior Lighting
- ○ EA: Prereq. Min. Energy Performance
- ○ EA: Optimize Energy Performance
- ● Recycled Content
  CLASS A   Pre: **33%** | Post: **0%**
  PROTECTONE® Pre: **45%** | Post: **0%**

TOOLS

Visit CertainTeed.com/Ceilings
Download HPDs and EPDs
LEED® Information / BIM Objects
3-Part Specs / Data Pages

GreenCircle CERTIFIED®

Carbon Footprint Reduction
Rapidly Renewable Resource Content
Recycled Content

UL CERTIFIED
ENVIRONMENTAL PRODUCT DECLARATION

EPD Available

hpd

HPD Available

In addition to traditional white, you can make an impact with one of our 5 standard colors for item numbers HHF-154, HHF-157, HHF-197

Beige Breeze   Blondewood   Silver Lining   Wet Clay   White Wash

FEATURES & BENEFITS

- 100% non-directional pattern
- Available in fire-rated (Protectone®) versions
- Variety of edge detail options and panel sizes
- High humidity and sag resistant
- Third-party verified Environmental Product Declaration (EPD) available for this product
- Health Product Declaration (HPD) available for this product

APPLICATIONS

- Schools
- Libraries
- Retail / Department Stores
- Offices
- Other Commercial Buildings / Space Applications

AVAILABLE EDGE DETAILS

Trim
15/16 Grid

Reveal Beveled
15/16 Grid

Narrow Reveal Corner Bevel
9/16 Grid

Narrow Reveal Corner Bevel
9/16 Grid Bolt Slot

Color-coordinated suspension systems available

CertainTeed Ceilings | **decoustics®** **Ecophon®** *Gyptone®* **PERFORMA™**

Fine Fissured Reveal (White) (HHF-157)

ATTRIBUTES

	DIMENSIONS (INCHES)	EDGE DETAIL	UL CLASSIFIED NRC	CAC	EPD AVAILABLE	HPD AVAILABLE	SAG RESISTANT	MOLD RESISTANT	LR	WASHABLE	FIRE CLASS (ASTM E1264)	EMISSION COMPLIANT	RECYCLED CONTENT
FINE FISSURED													
HHF-157	24 x 24 x 5/8	Trim	0.60	33	Yes	Yes	Yes	BioShield	0.84	—	Class A	Certified	33%
PFF-157	24 x 24 x 5/8	Trim	0.55	35	Yes	Yes	Yes	BioShield	0.84	—	Protectone*	Certified	45%
HHF-154	24 x 24 x 5/8	Reveal	0.60	33	Yes	Yes	Yes	BioShield	0.84	—	Class A	Certified	33%
PFF-154	24 x 24 x 5/8	Reveal	0.55	35	Yes	Yes	Yes	BioShield	0.84	—	Protectone*	Certified	45%
HHF-150	24 x 24 x 5/8	Narrow Reveal	0.60	35	Yes	Yes	Yes	BioShield	0.84	—	Class A	Certified	33%
HHF-197	24 x 48 x 5/8	Trim	0.60	35	Yes	Yes	Yes	BioShield	0.84	—	Class A	Certified	33%
PFF-197	24 x 48 x 5/8	Trim	0.55	40	Yes	Yes	Yes	BioShield	0.84	—	Protectone*	Certified	45%
HHF-194	24 x 48 x 5/8	Reveal	0.60	35	Yes	Yes	Yes	BioShield	0.84	—	Class A	Certified	33%
HHF-2067	20 x 60 x 5/8	Trim	0.60	35	Yes	Yes	Yes	BioShield	0.84	—	Class A	Certified	33%
HHF-177	24 x 60 x 5/8	Trim	0.60	35	Yes	Yes	Yes	BioShield	0.84	—	Class A	Certified	33%

*Protectone®: A fire-resistive ceiling when used in applicable UL assemblies.

CAN'T FIND A SIZE? Contact your local Sales Representative or call 800-233-8990

PHYSICAL DATA

MATERIAL
Mineral Fiber

ASTM E1264 CLASSIFICATION
Type III, Form 2, Pattern C D

FIRE CLASS (ASTM E1264)
Tested according to ASTM E84 & CAN S102
Flame Spread: 25 or less
Smoke Developed: 50 or less

VOC EMISSIONS
Independently certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010.

MOLD/MILDEW RESISTANCE
BioShield® treatment included for added mold and mildew resistance.

MAINTENANCE
Wipe with a soft cloth or vacuum with brush attachment.

WARRANTY
10-year 104/90 Limited Warranty

INSTALLATION CONSIDERATION
Colored ceilings are dye-lotted and should not be mixed.

CertainTeed
SAINT-GOBAIN

Ceilings